


FIBRLUX BAPTISTRIES

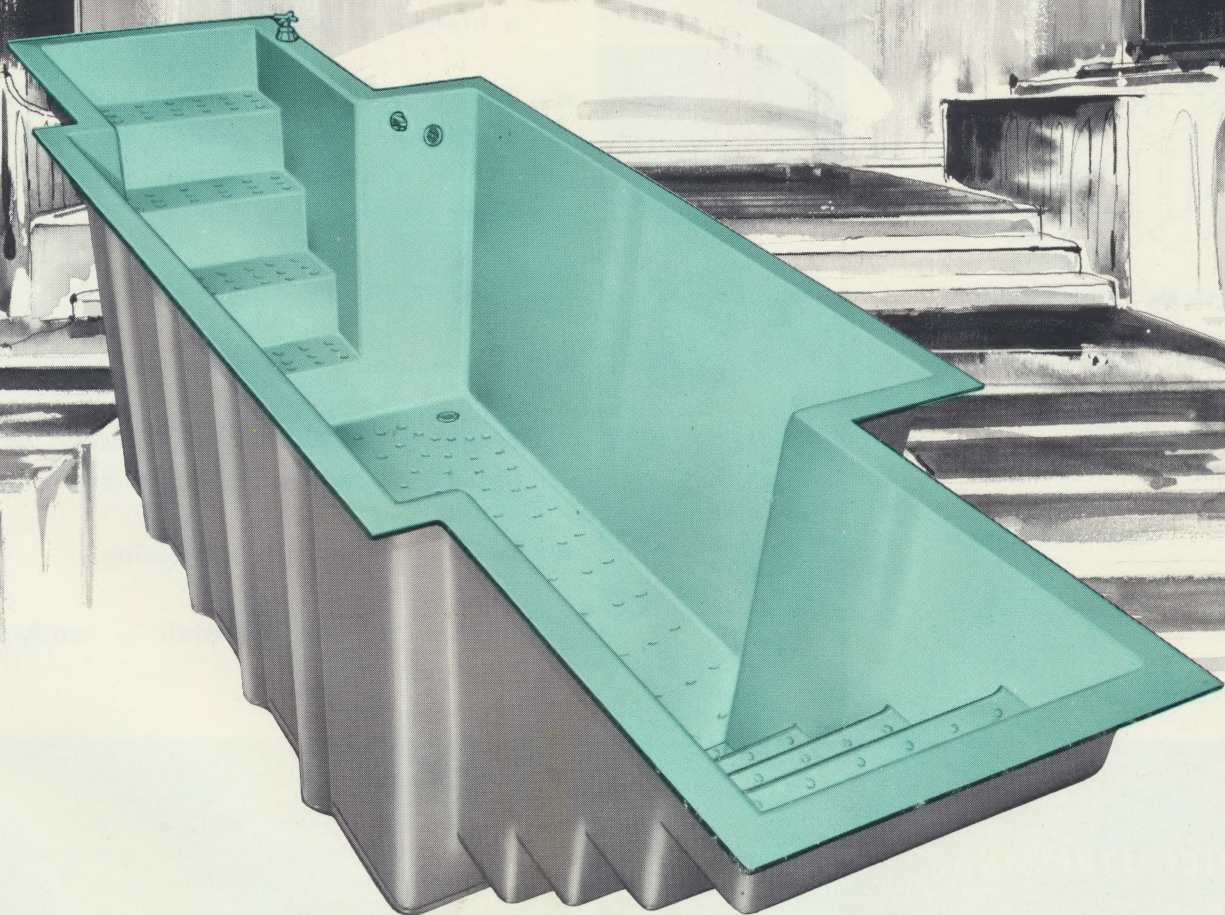

A PRODUCT OF


Wiedemann Industries, Inc.

P. O. Box 672


Muscataine, Iowa

NEVER BEFORE OFFERED IN A LOW COST FIBERGLASS BAPTISTRY

DIMENSIONS

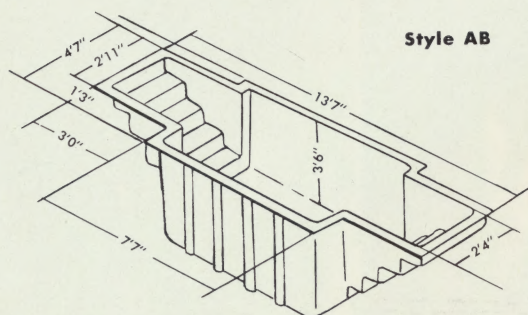


Style BG, 11'7" in length

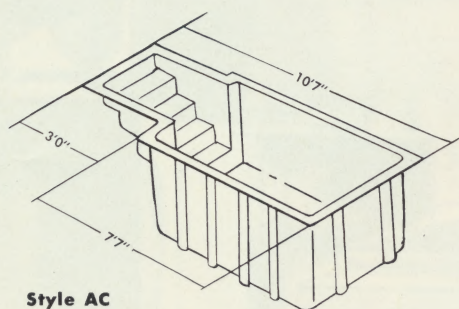


Style AC

Style BH, 8' 7" in length

Deluxe Models overall height — 3'10⁵/₈"
Fibrlux Models overall height — 3'6⁷/₈"



RIGHT HAND ENTRANCE








LEFT HAND ENTRANCE

* FIBERSTRESSING

... an exclusive process developed
by WIEDEMANN INDUSTRIES, INC.
The superior strength qualities of
Fiberstressing eliminates many
heavy external re-inforcing members
... reduces shipping weight ...
increases job-handling ease.

THE FIBRLUX FIBERGLASS BAPTISTRY



- ◀ Skid-resistant decorative relief pattern is gentle to the touch.
- Solid floor area fully re-inforced.
- ◀ Molded-in, recessed drain port and slightly pitched floor for complete drainage.
- Corners gently rounded for safety and beauty.
- ◀ Chrome fill port tumbles water in with whisper-like action — no gushing or roaring.
- Rich lustrous interior finish molded-in for a lifetime of beauty.
- ◀ Picture window glazed with clear Atlasite crystal. Many times stronger than plate glass . . . it is virtually scratch resistant and will never discolor.
- Superior raw materials.
- ◀ Unit molded — no seams or joints.
- Exclusive FIBERSTRESSING Process* — for a lifetime of maintenance-free service.
- ◀ Built-in full lateral re-inforcing.
- Lightweight, easy to install — ready to set in place.

Designed and crafted by WIEDEMANN INDUSTRIES, INC., the originator of the fiberglass baptistry and the world's oldest and leading baptistry specialist. Experience where experience counts.



FIBRLUX BAPTISTRIES

A PRODUCT OF



Wiedemann Industries, Inc.

P. O. Box 672


Muscatine, Iowa

Phone area code 319


263-6642

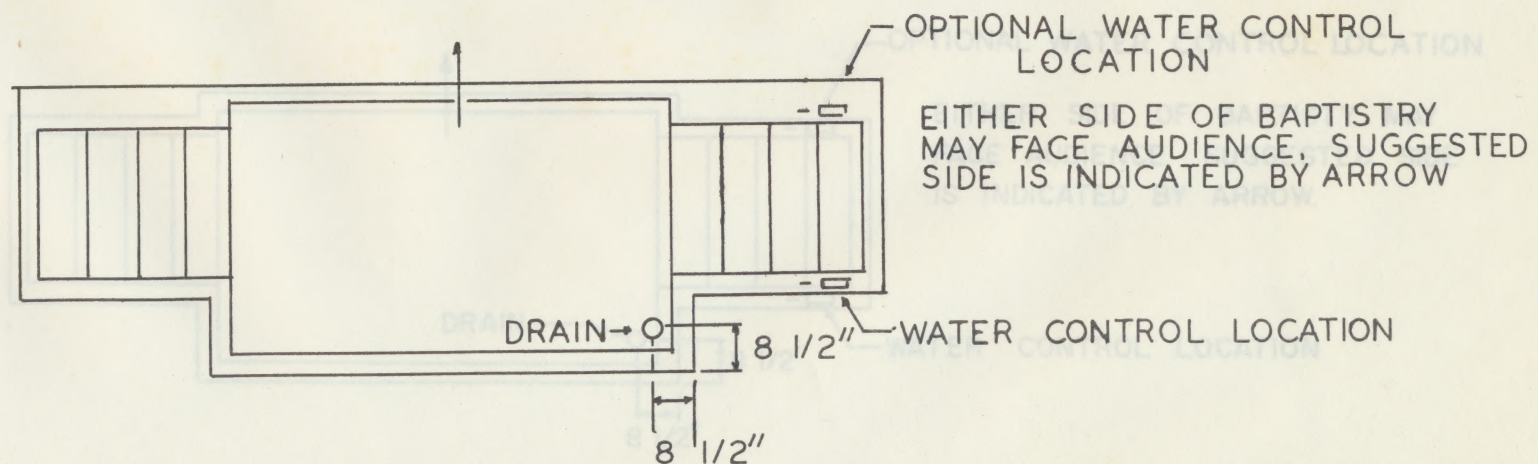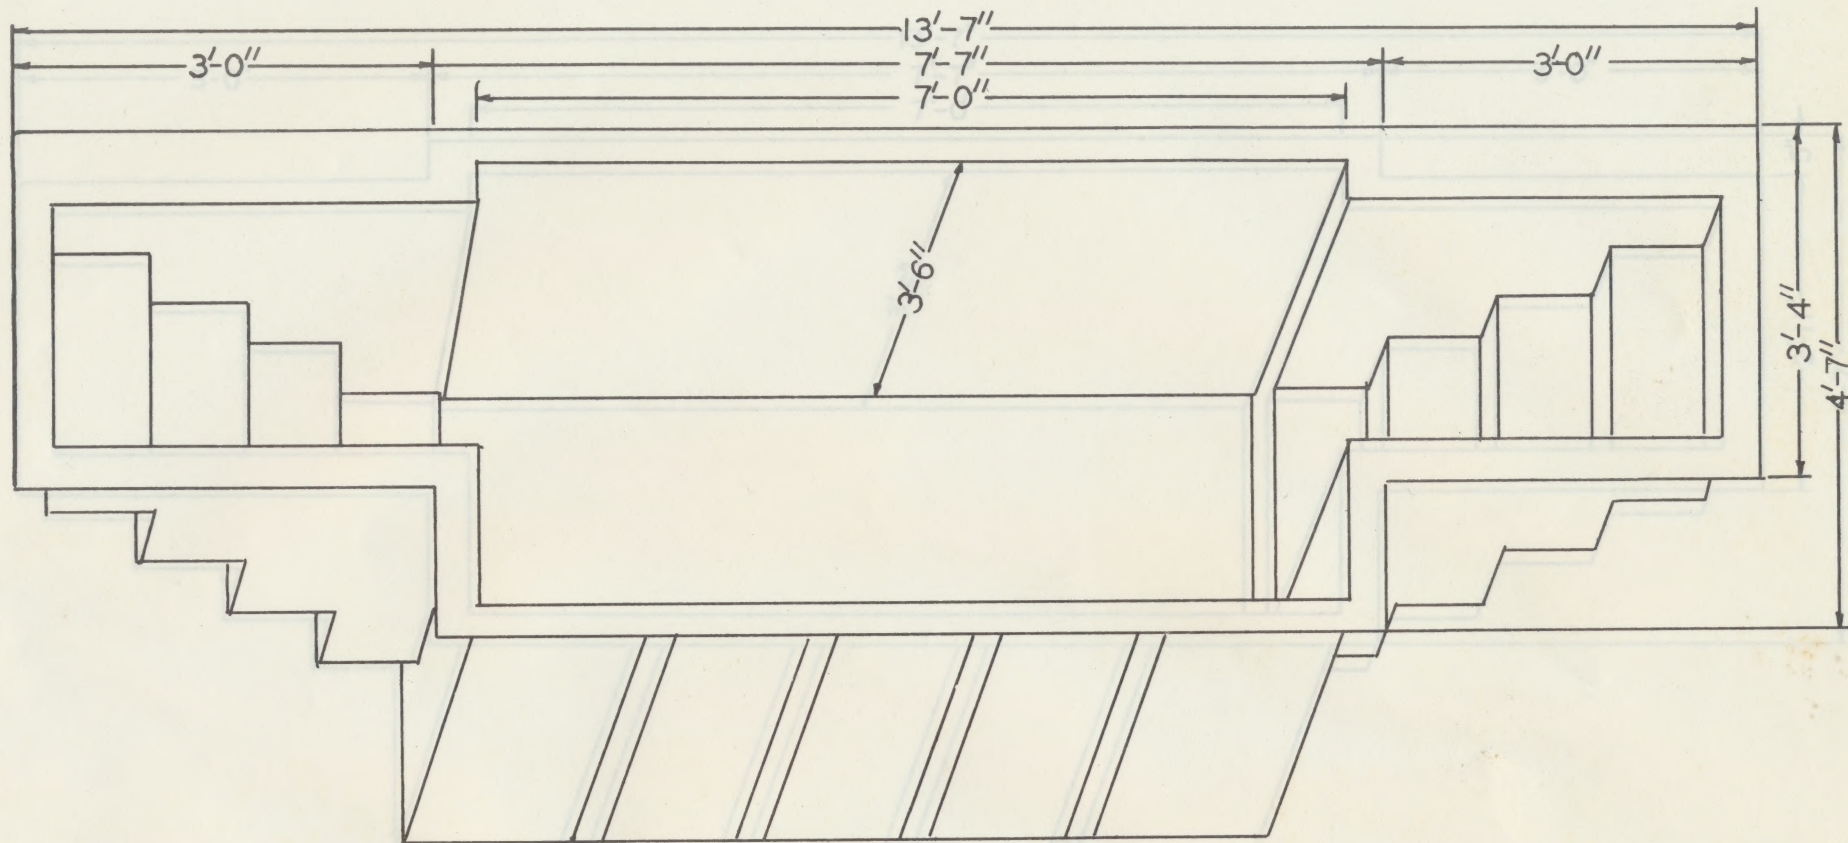



STYLE AB-F

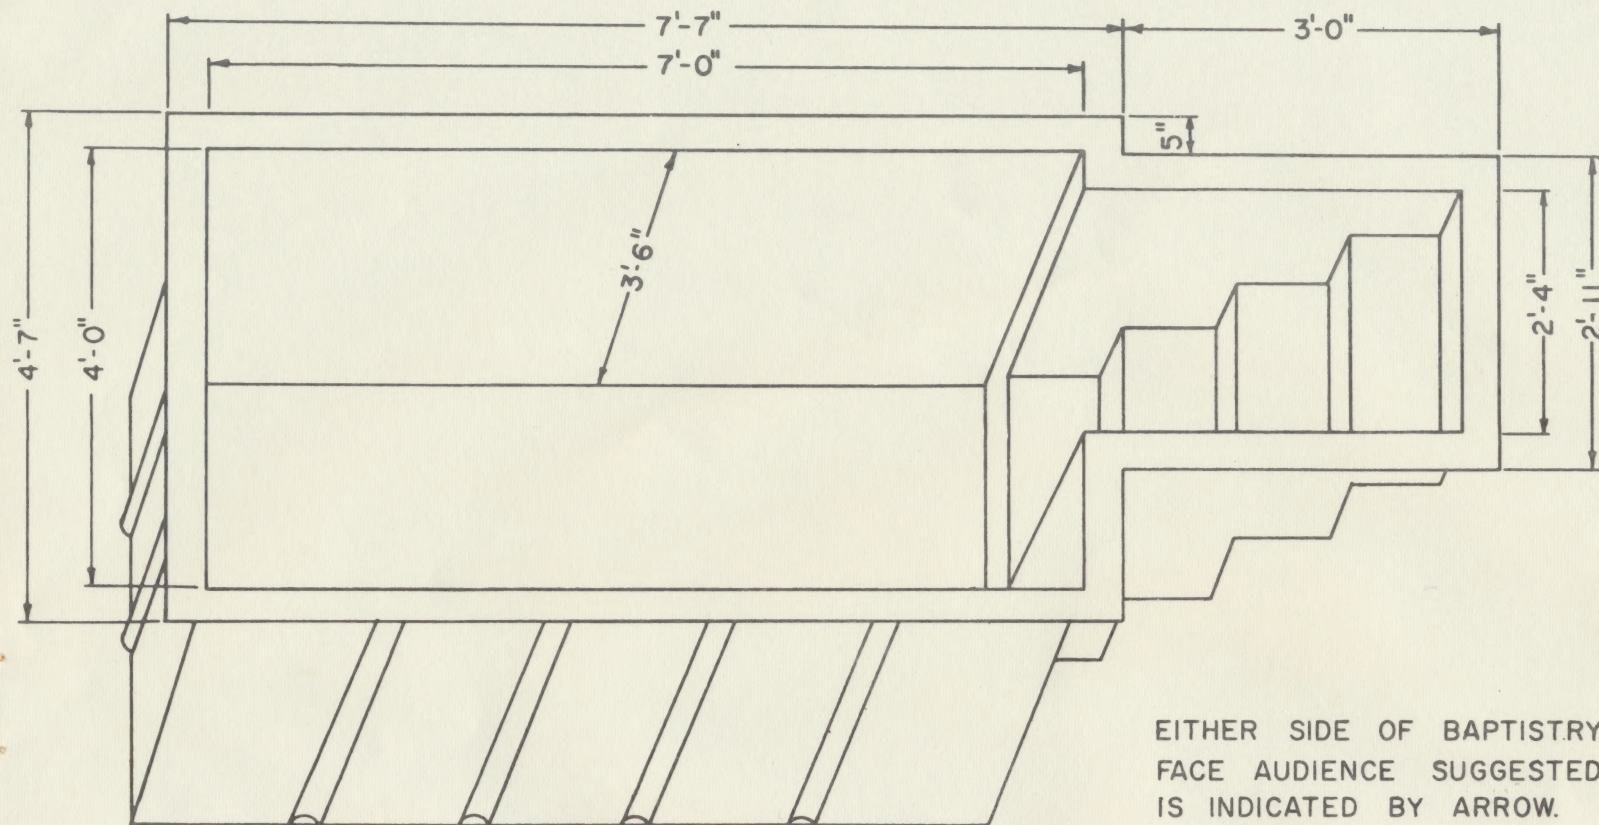

EITHER SIDE OF BAPTISTRY MAY
FACE AUDIENCE SUGGESTED SIDE
IS INDICATED BY ARROW.


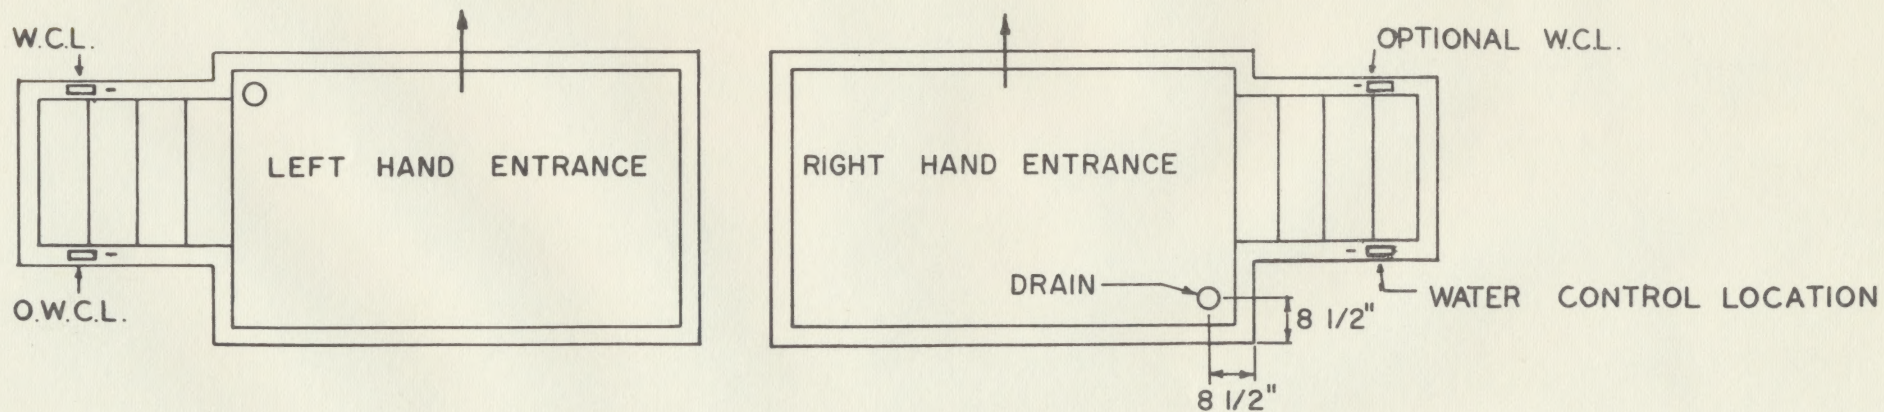


STYLE AC

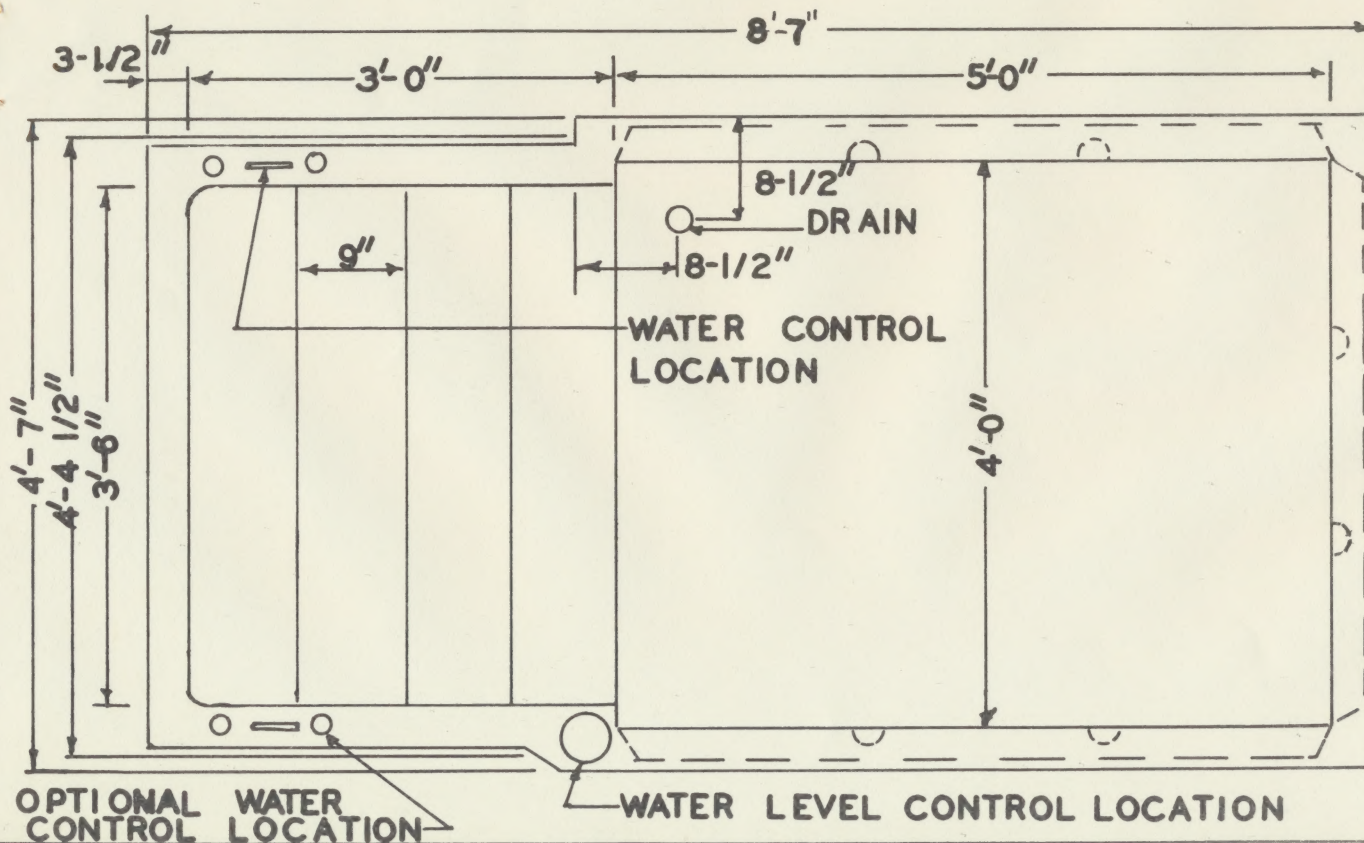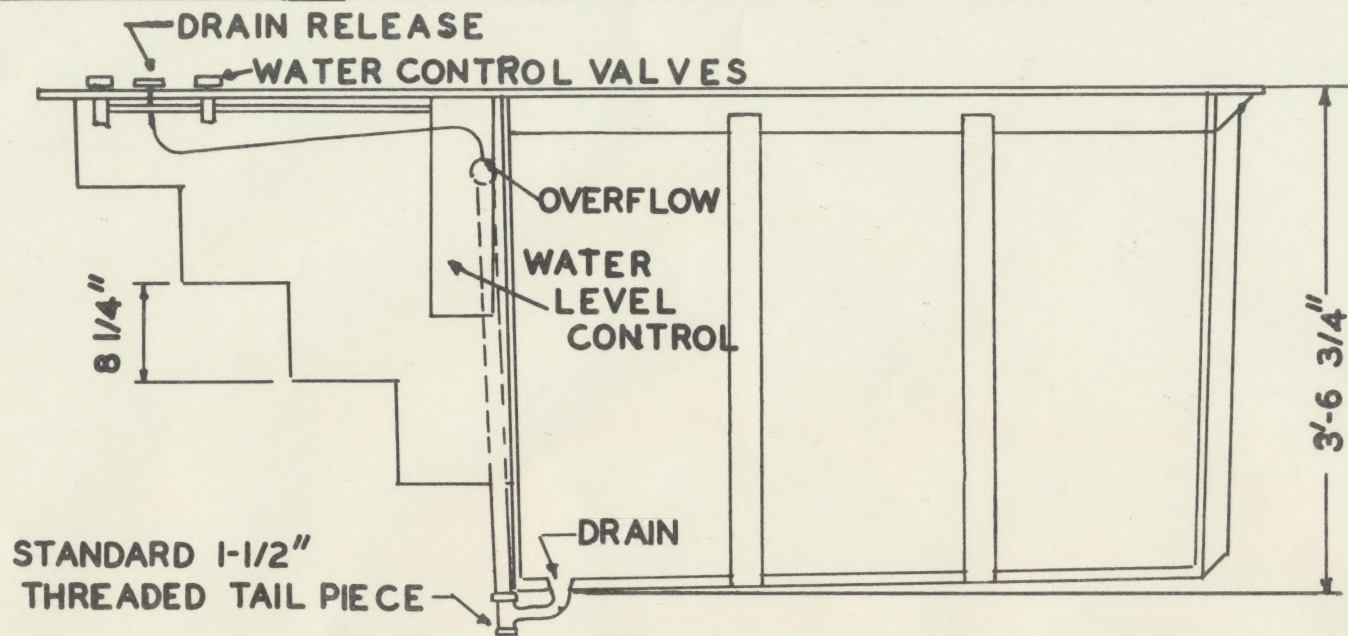


DEPTH OF BAPTISTRY 3'-6"


FIBRLUX MODELS
STYLE BD
WIEDEMANN INDUSTRIES, INC.
MUSCATINE, IOWA

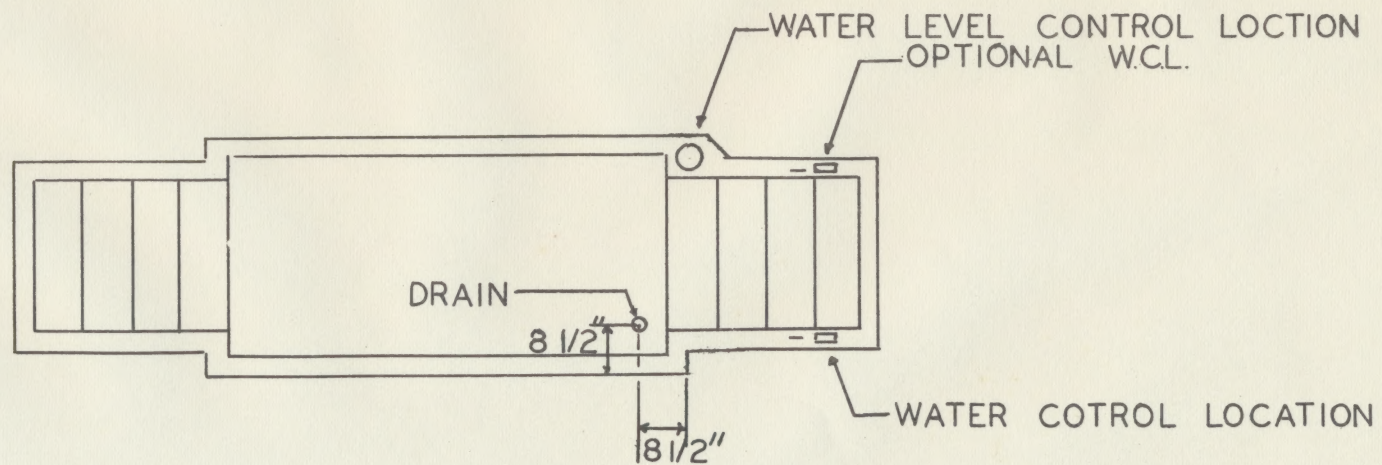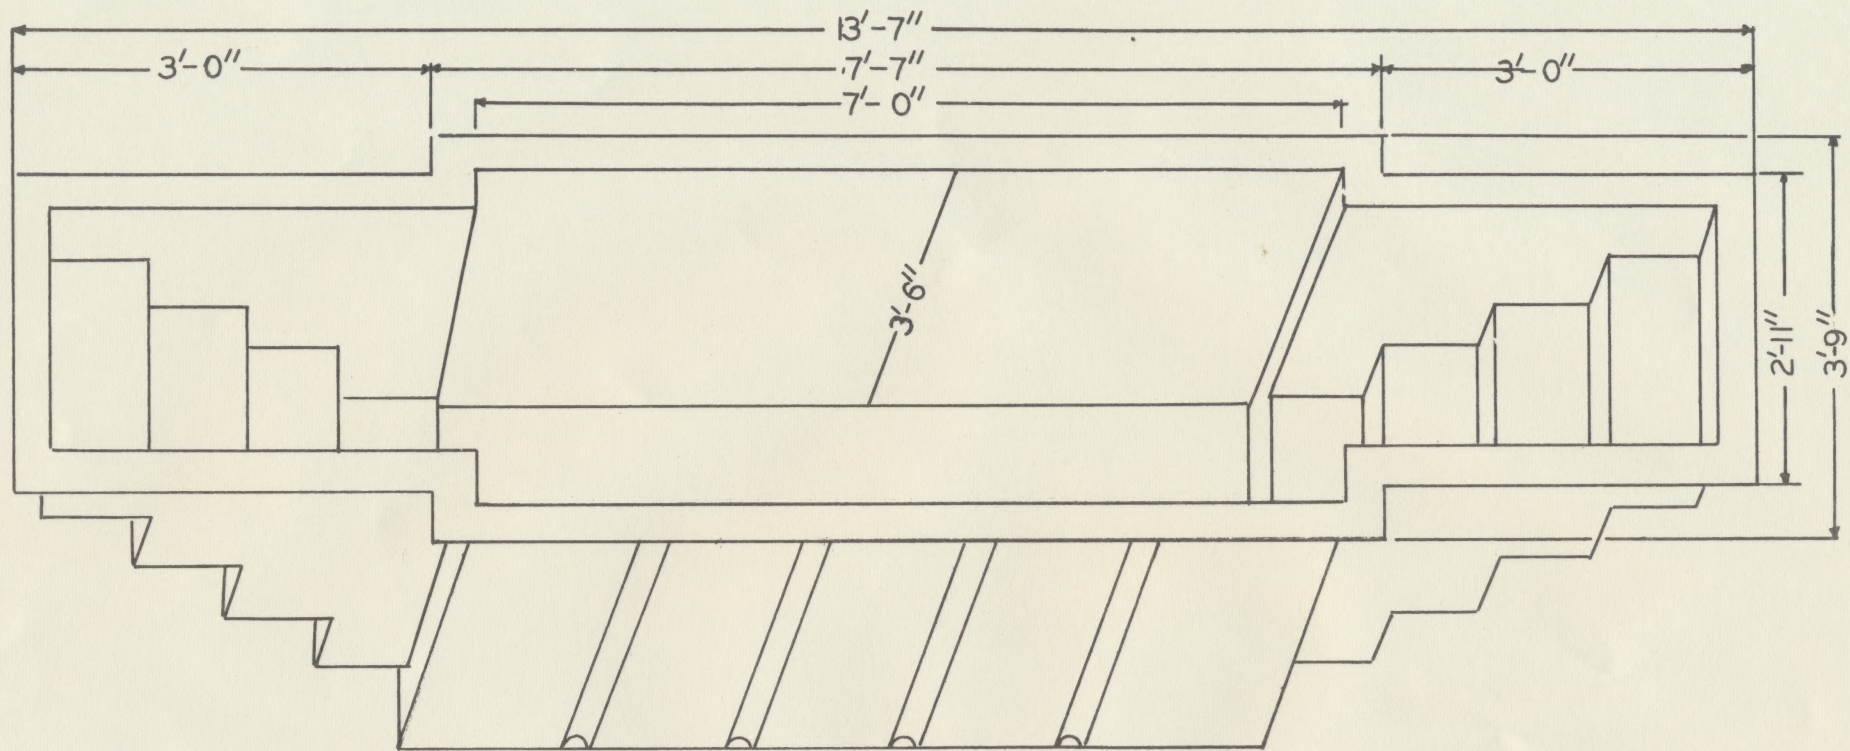


STYLE C-2

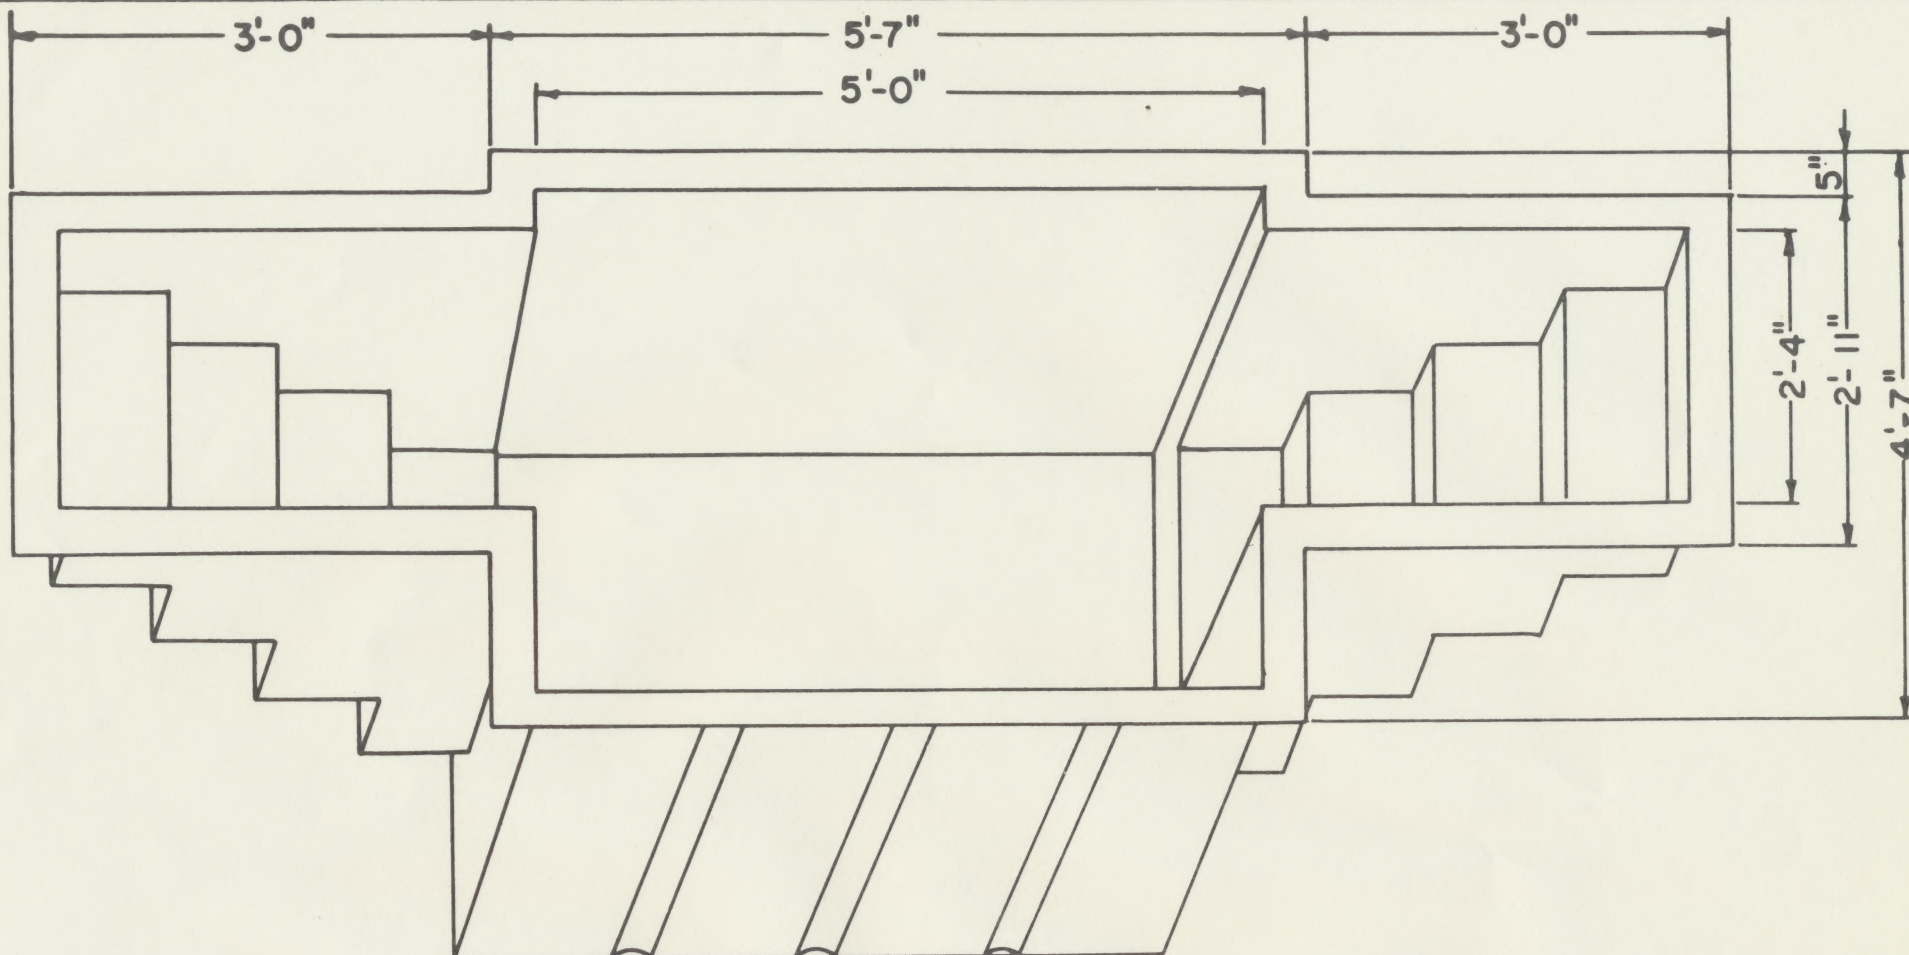



*OUTSIDE DIMENSIONS. FOR
PROPER DRAINAGE TOP OF
BAPTISTRY SHOULD BE
LEVEL WHEN INSTALLED.

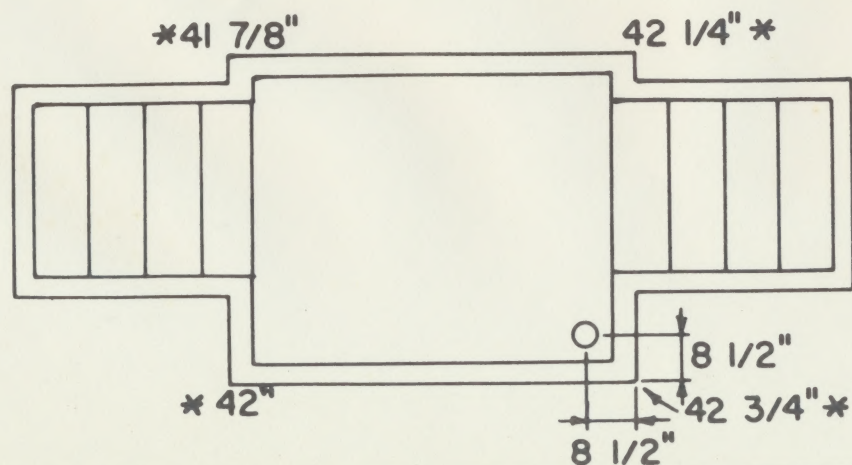

FIBRLUX BAPTISTRY
STYLE BG
WIEDEMANN INDUSTRIES, INC.
BOX 672
MUSCATINE, IOWA

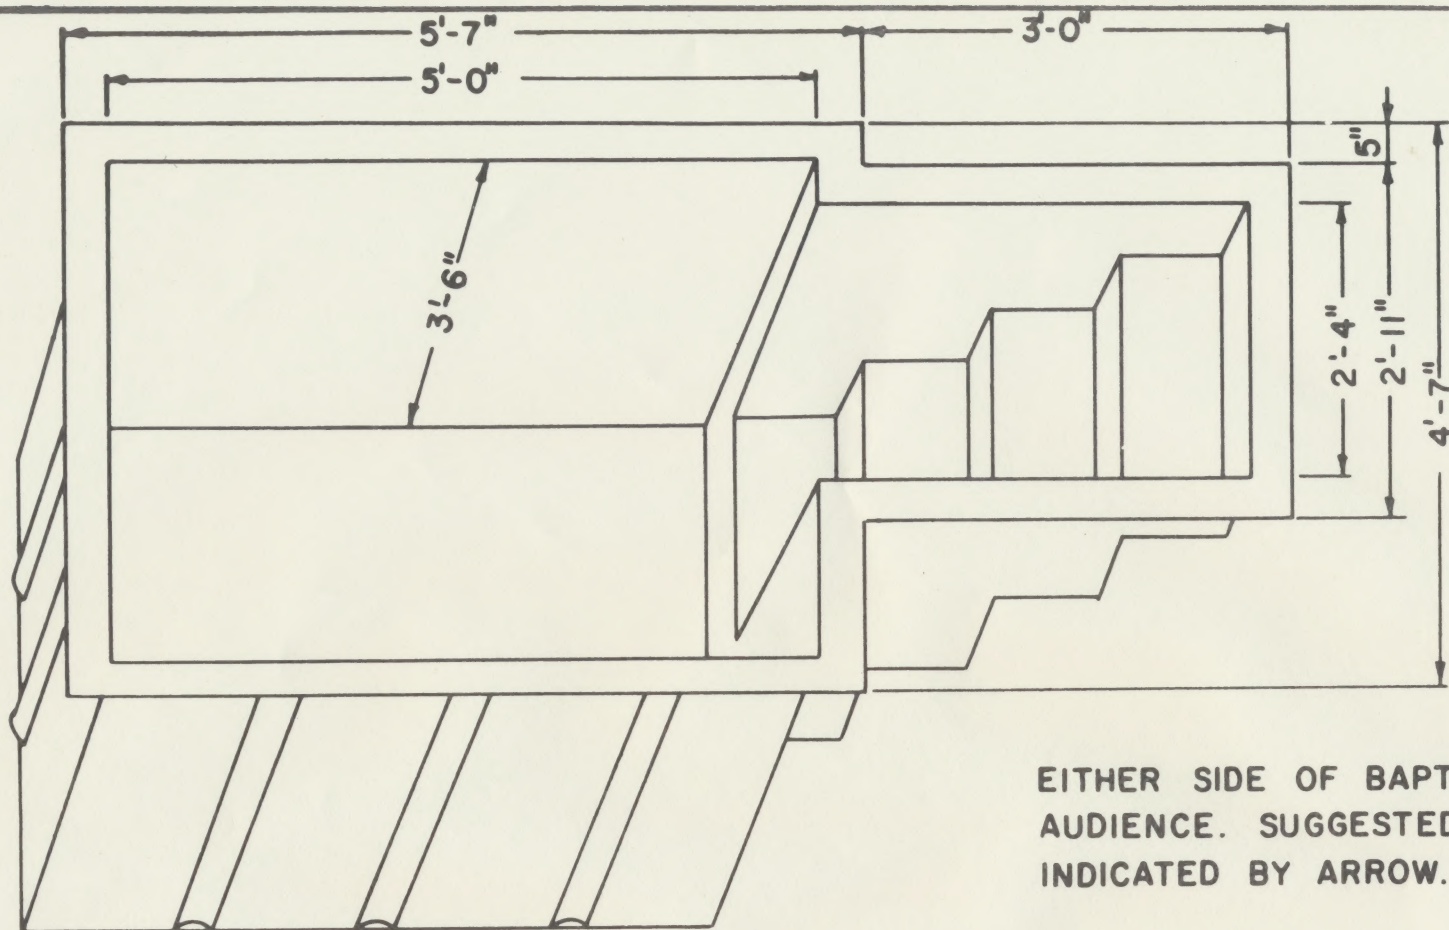


EITHER SIDE OF BAPTISTRY MAY FACE AUDIENCE. SUGGESTED SIDE IS INDICATED BY ARROW.

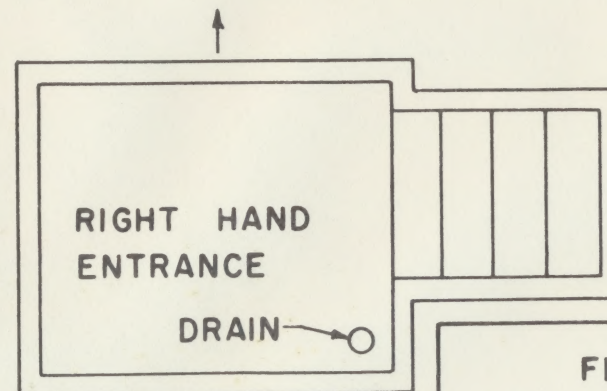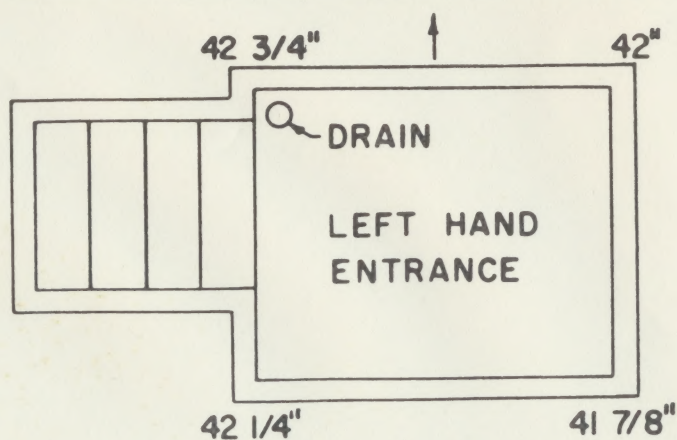


TOP OF BAPTISTRY SHOULD BE LEVEL WHEN INSTALLED FOR PROPER DRAINAGE.

FIBRLUX MODELS
STYLE BH


WIEDEMANN INDUSTRIES, INC.
BOX 672
MUSCATINE, IOWA

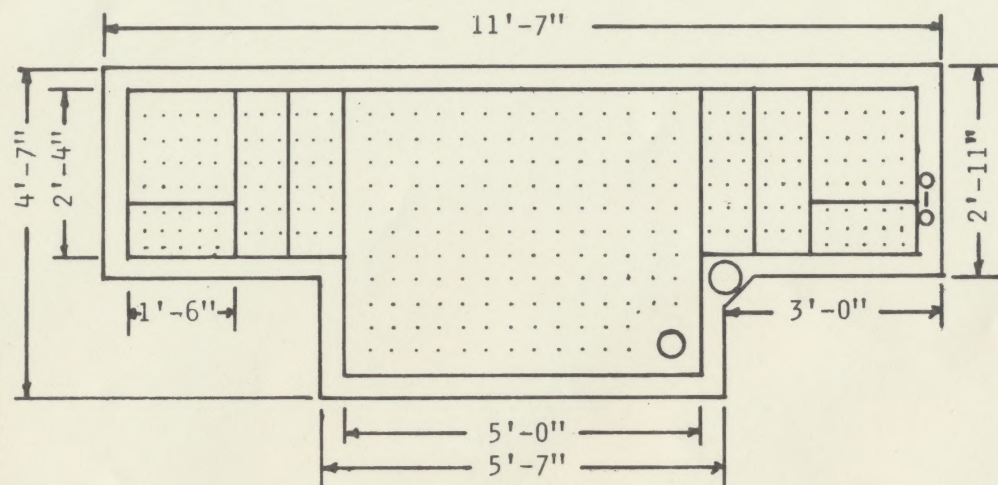

STYLE BG-ST

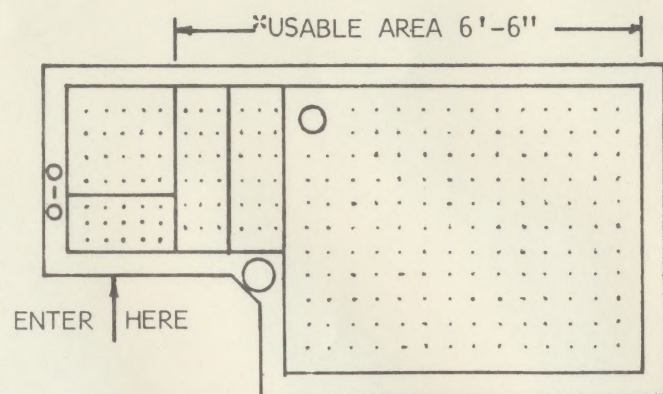

STYLE BH-ST
LEFT HAND ENTRANCE


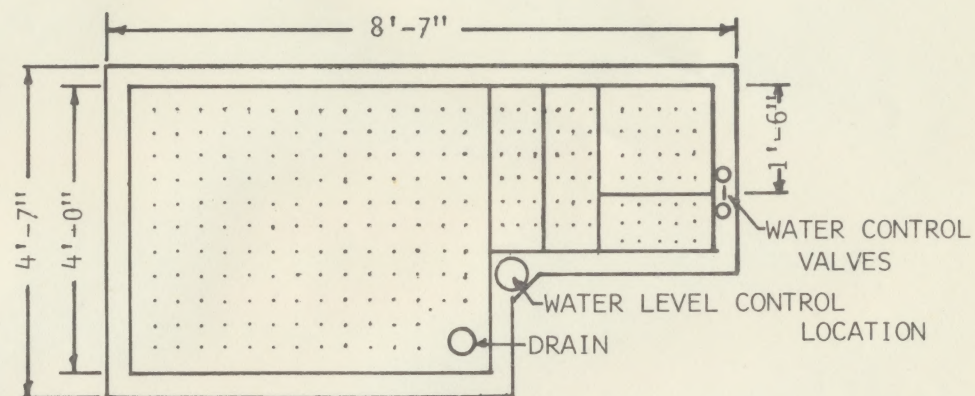


STYLE BH-ST
RIGHT HAND ENTRANCE

* USABLE AREA INDICATES AREA DEEP ENOUGH FOR BAPTISIMAL PURPOSE.


FIBERGLASS BAPTISTRIES
STYLE BG-ST & BH-ST

WIEDEMANN INDUSTRIES, INC.
MUSCATINE, IOWA

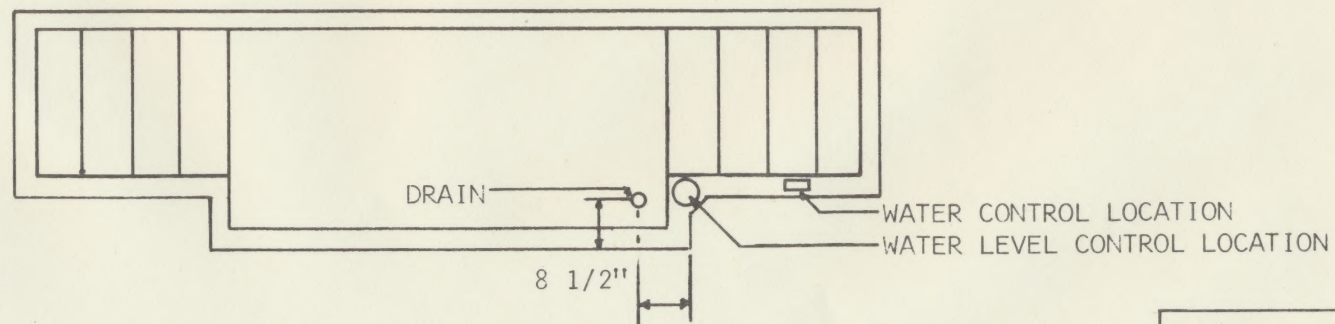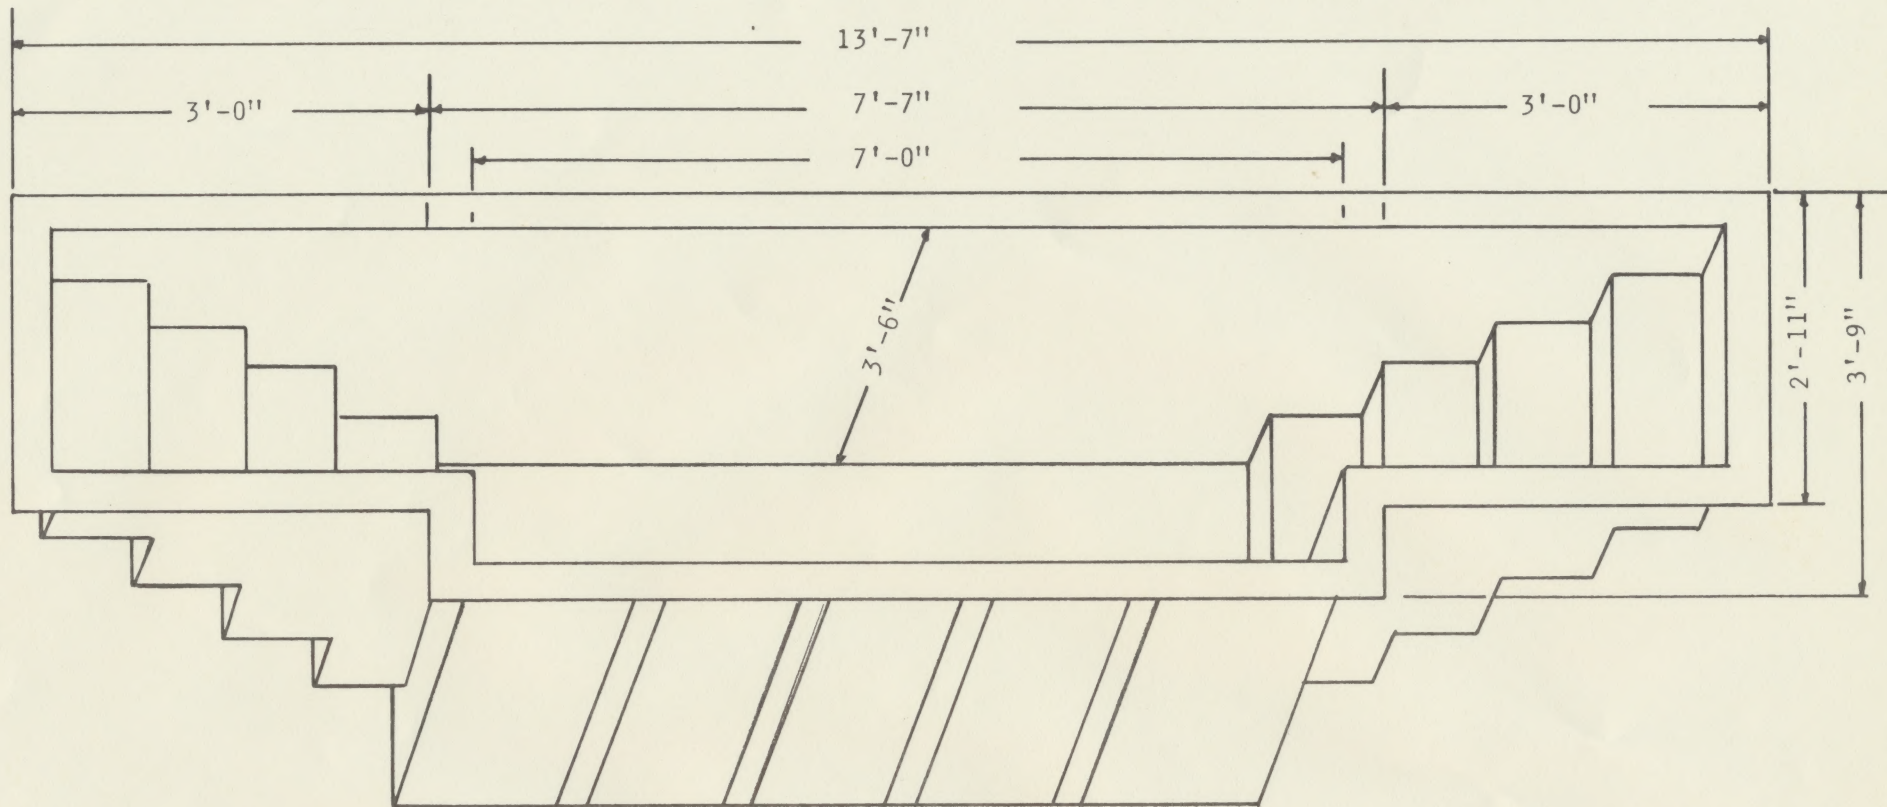

FIBRLUX MODELS
STYLE CS-2



WIEDEMANN INDUSTRIES, INC
MUSCATINE, IOWA

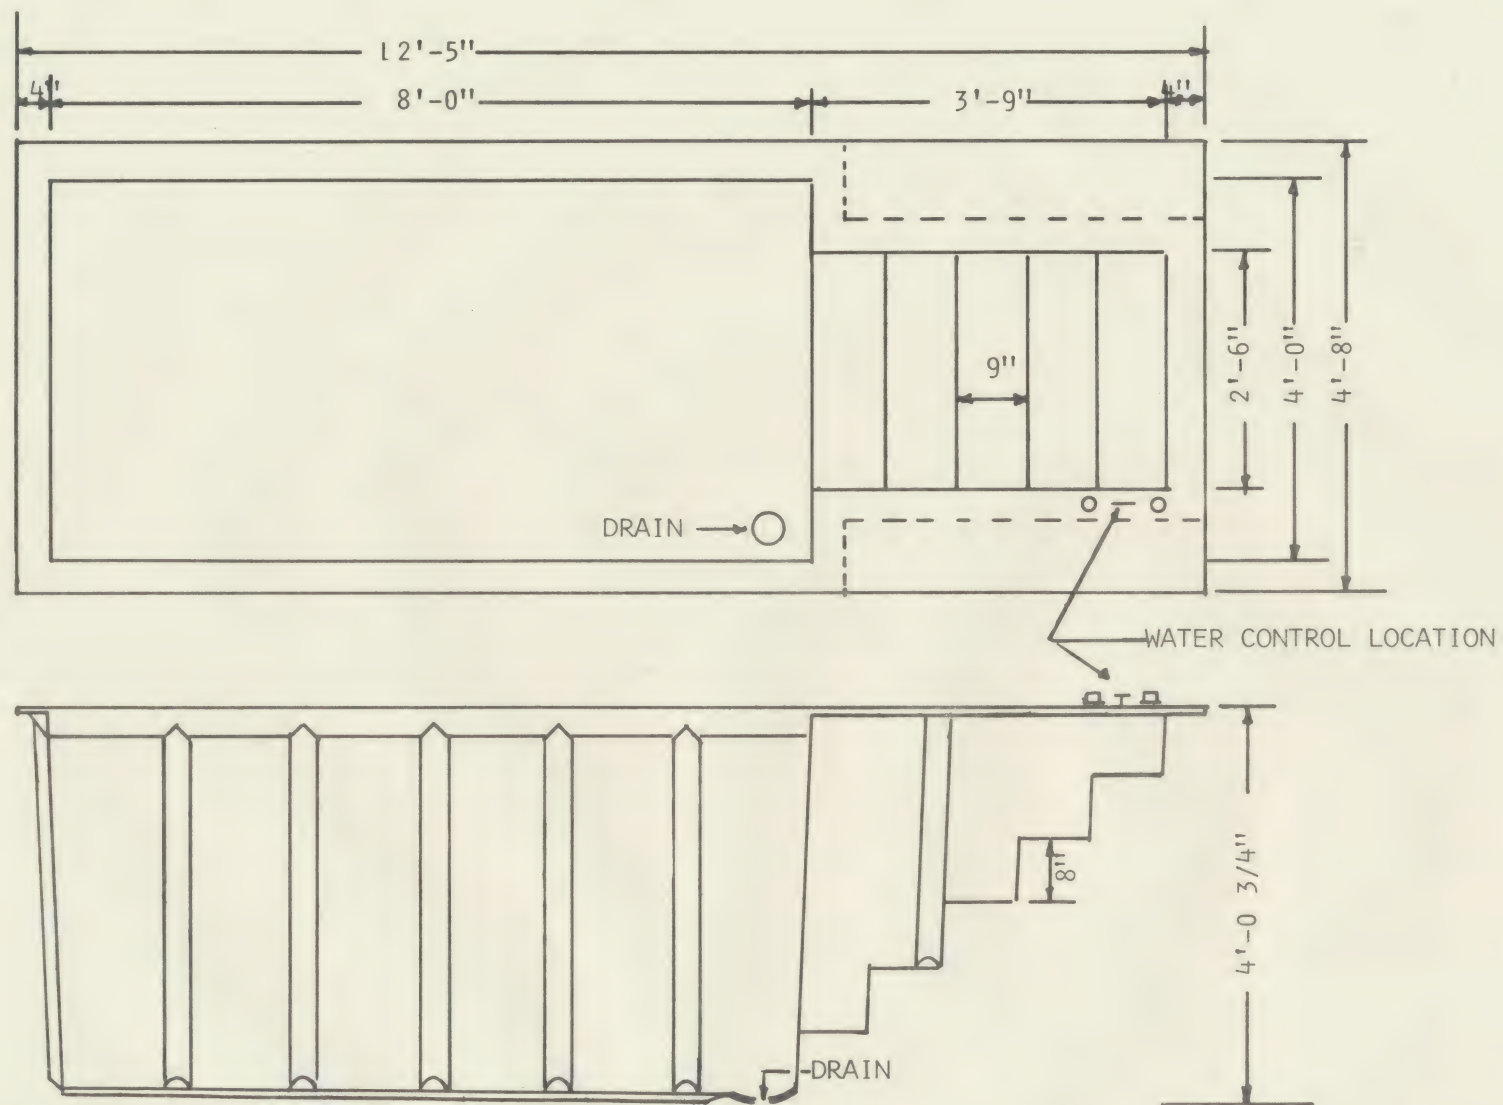

NOTE: FLANGE MAY BE TRIMMED ON EITHER SIDE OF STEPS AS INDICATED BY DOTTED LINES.

FIBRLUX MODEL
STYLE E-1 F-2



WIEDEMANN INDUSTRIES, INC.
MUSCATINE, IOWA

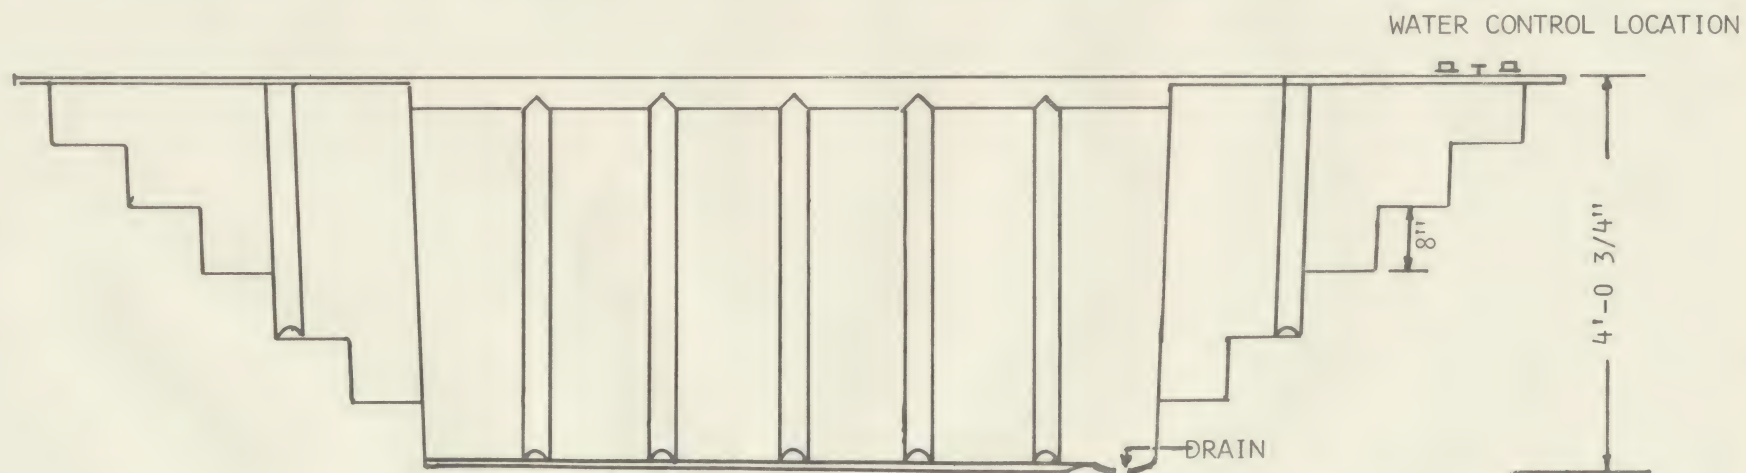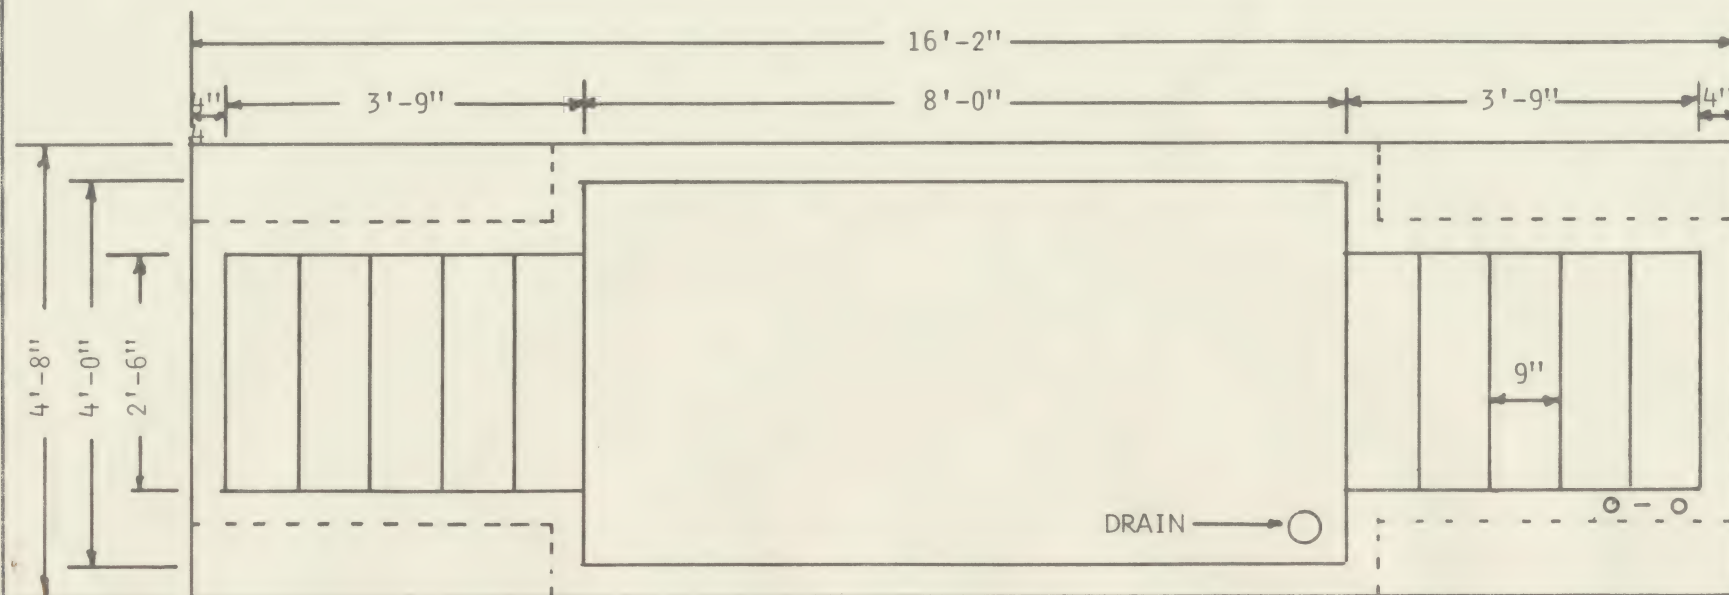


NOTE: FLANGE MAY BE TRIMMED ON EITHER SIDE OF STEPS AS INDICATED BY DOTTED LINES

FIBRLUX MODEL
STYLE E-2 F-2

WIEDEMANN INDUSTRIES, INC.
MUSCATINE, IOWA

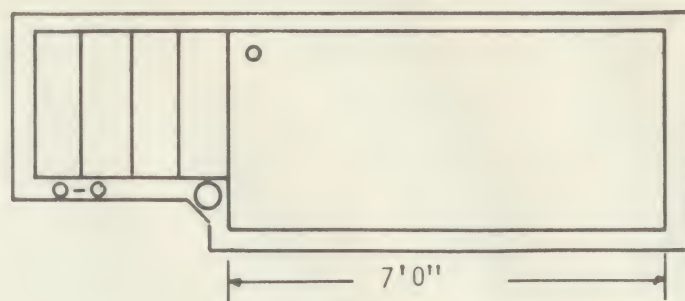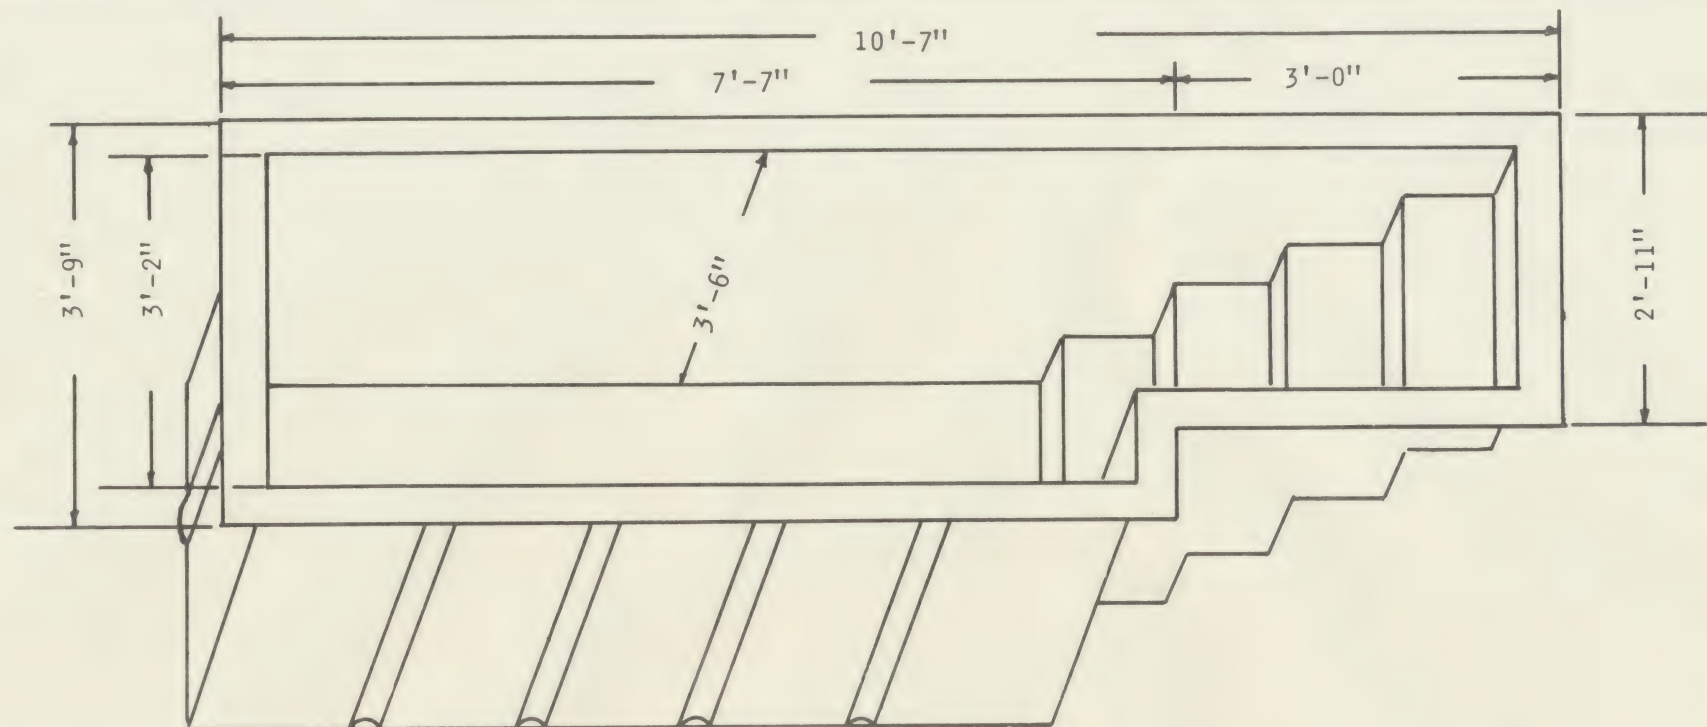

LEFT HAND ENTRANCE


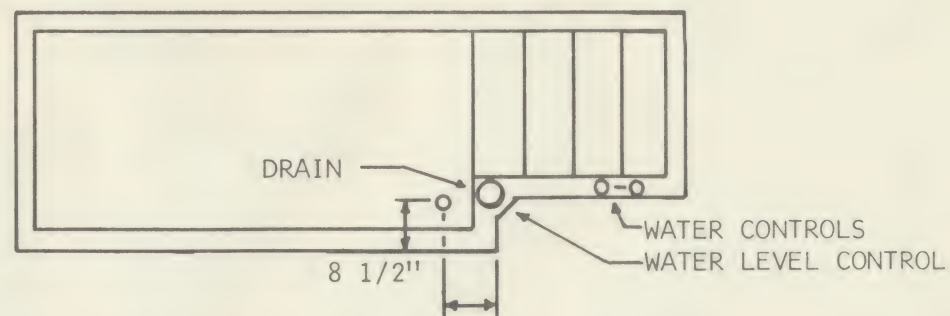


RIGHT HAND ENTRANCE

NOTE: EITHER SIDE OF THE BAPTISTRY MAY FACE THE AUDIENCE.


FIBERGLASS BAPTISTRY
FIBRLUX MODELS

STYLE CS-1
WIEDEMANN INDUSTRIES, INC
MUSCATINE, IOWA

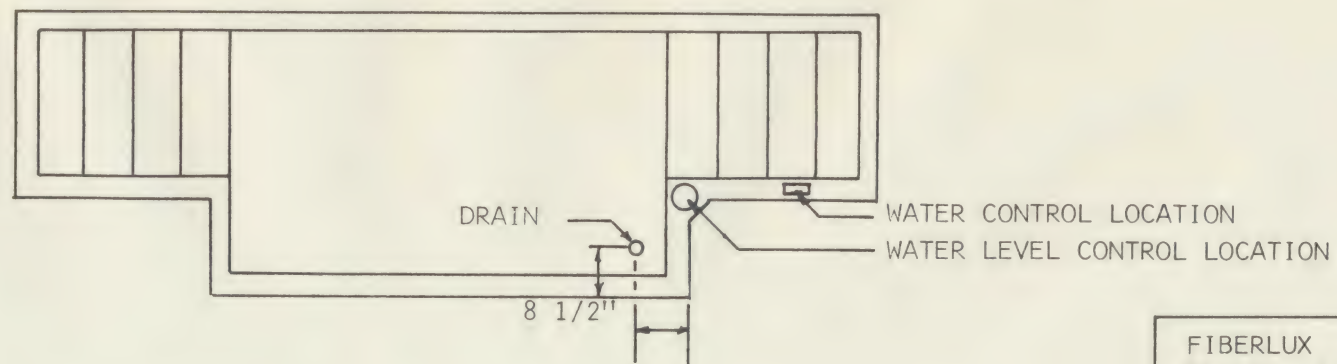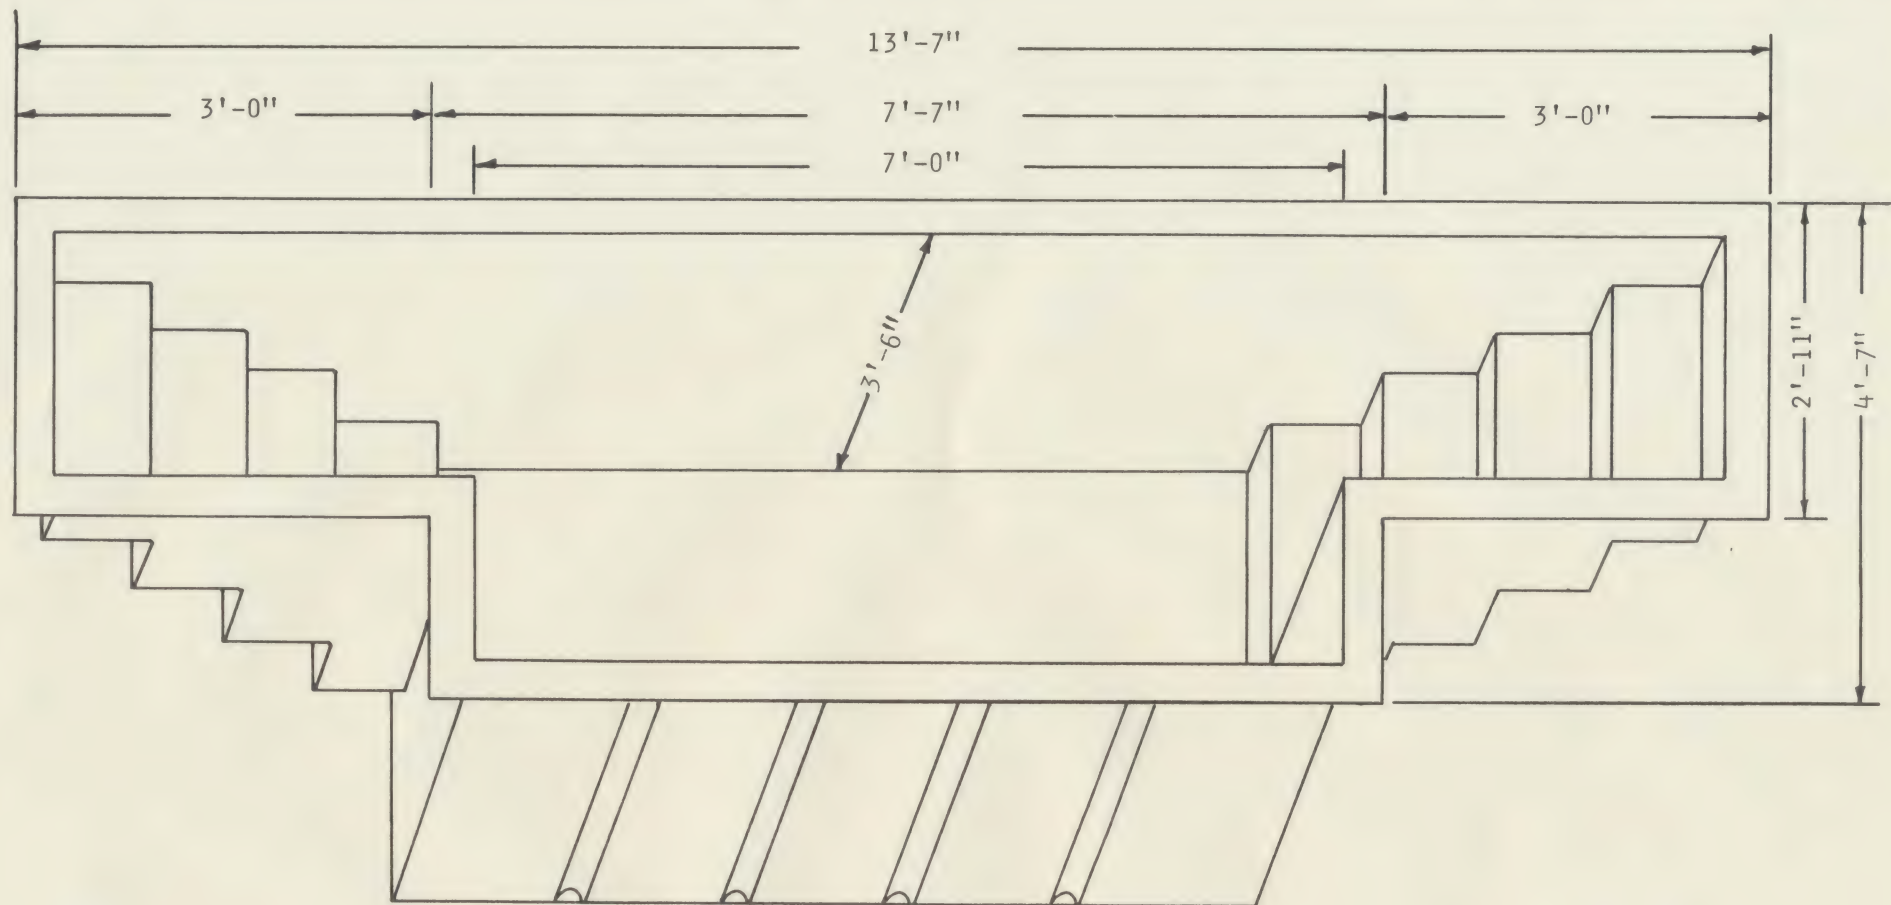

FIBERLUX MODELS
STYLE AB-S

WIEDEMANN INDUSTRIES,
INC.
MUSCATINE, IOWA

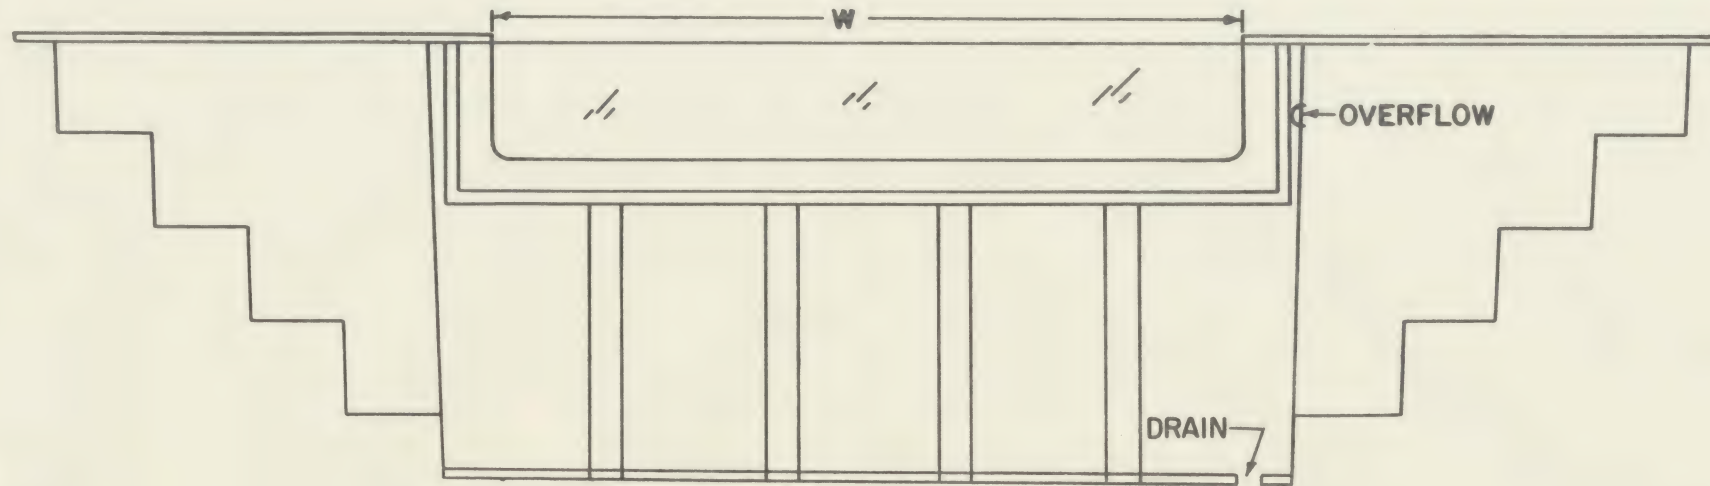



PICTURE WINDOW SIZES

W - 6'-0" H - 1'-6"
 W - 6'-0" H - 1'-0"


W - 5'-0" H - 9"
 *W - 4'-0" H - 1'-6"

* DESIGNED FOR STYLE BC,
 BD, BG & BH BAPTISTRIES.

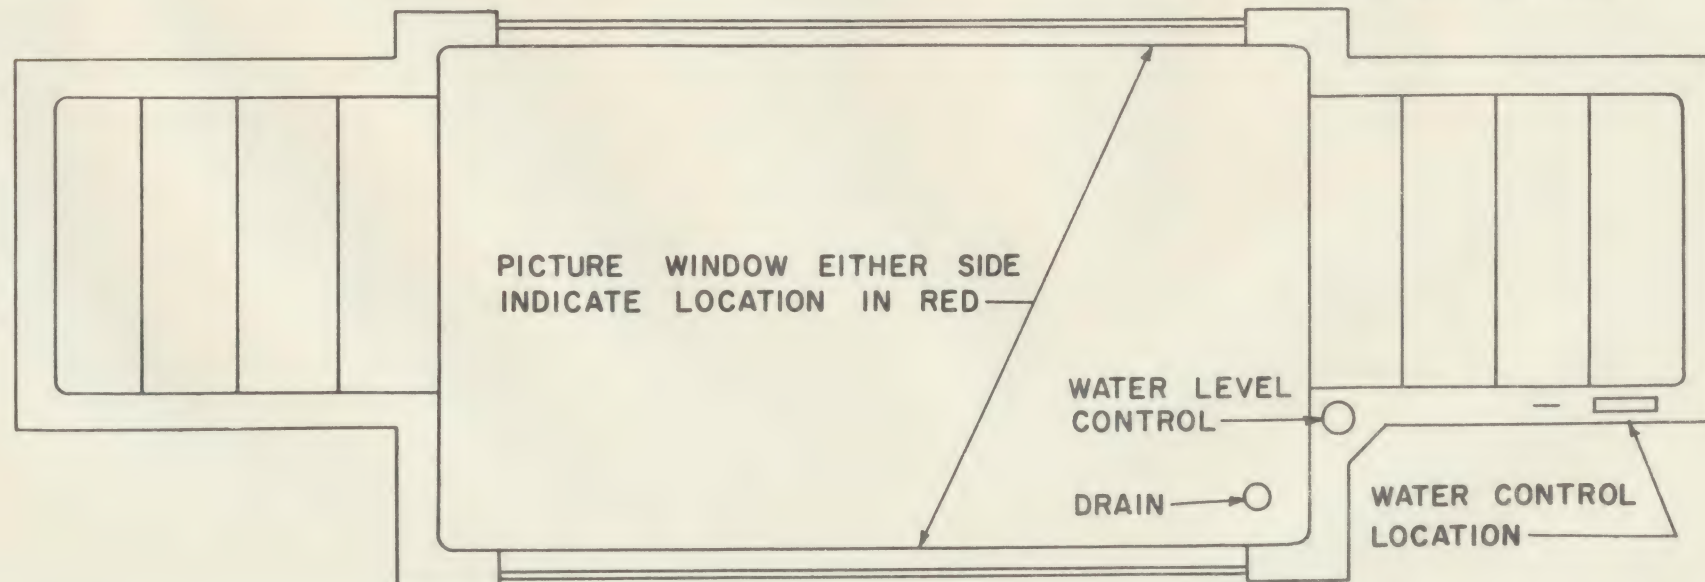


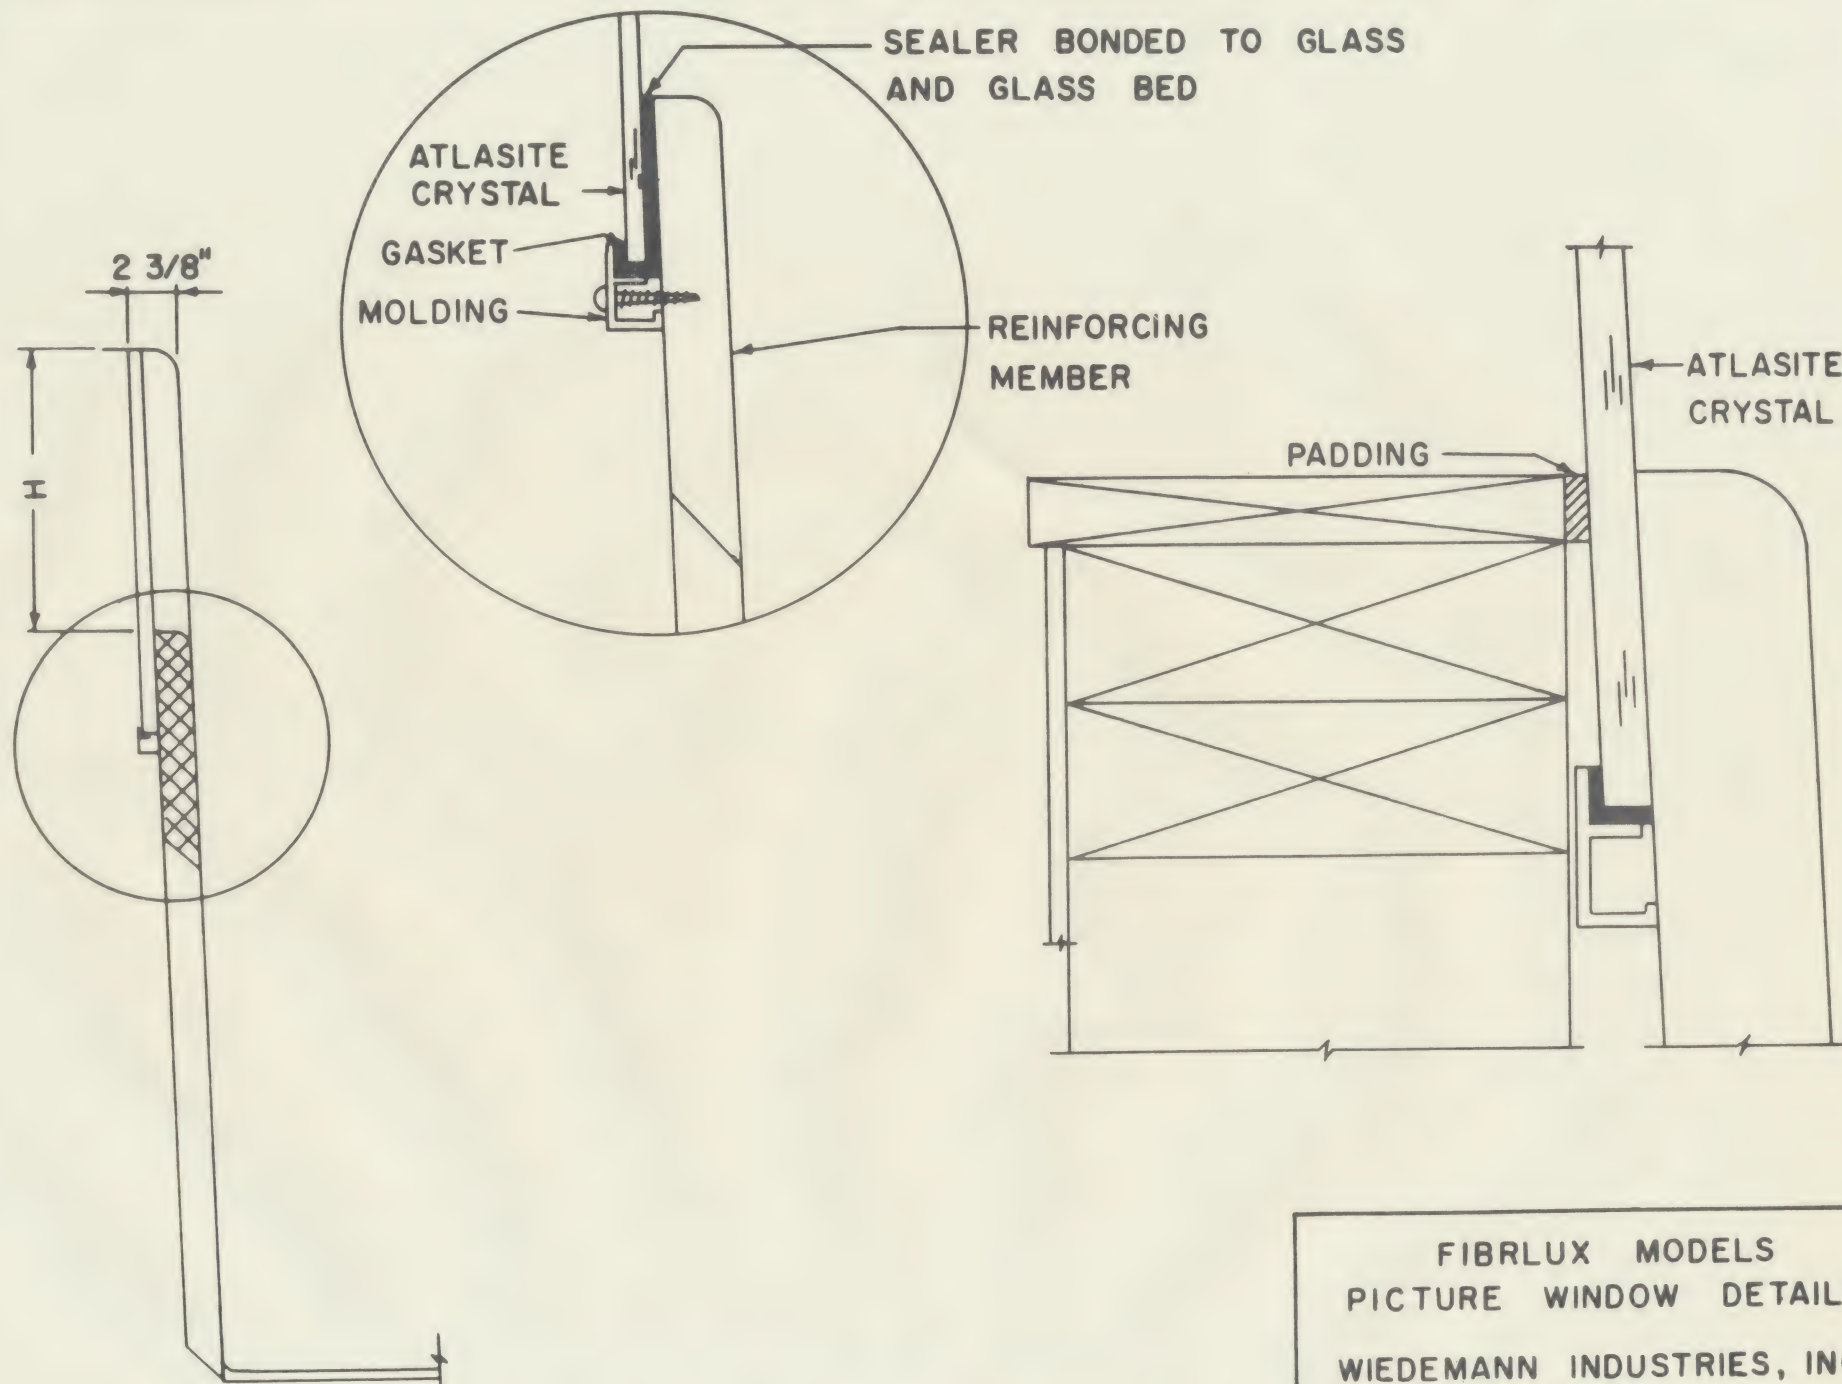

FIBRLUX MODELS
PICTURE WINDOW DETAILS
WIEDEMANN INDUSTRIES, INC.
BOX 672
MUSCATINE, IOWA

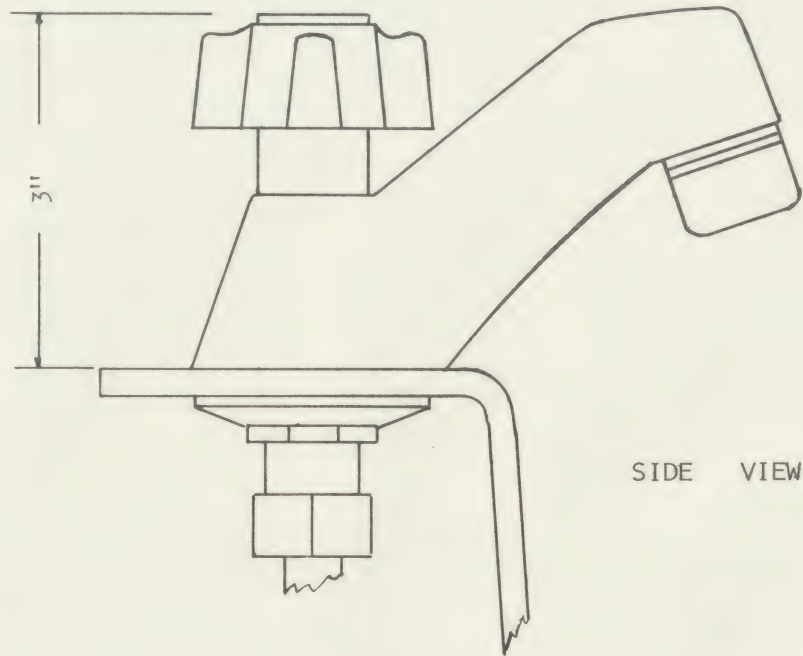FILL VALVE AND OVER-THE-RIM-FILL UNIT


SIDE VIEW

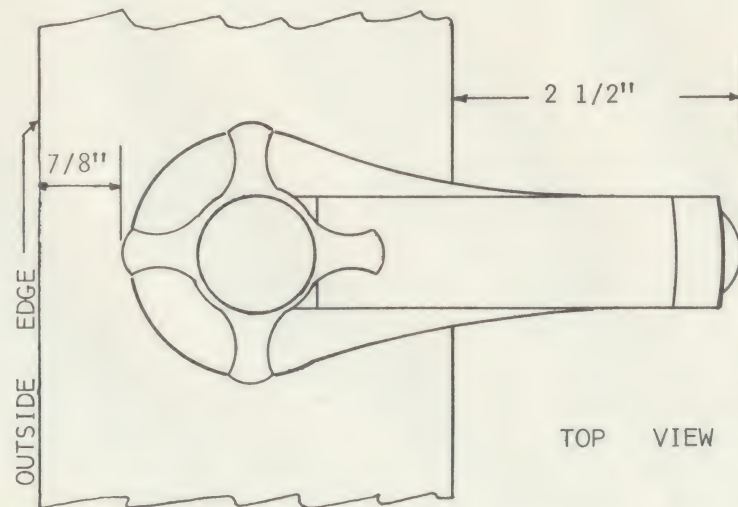


TOP VIEW

OVERFLOW PORT AND DRAIN FITTING

SIDE VIEW


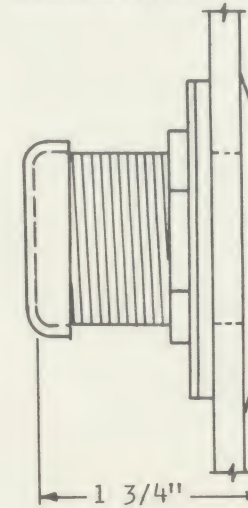


FRONT VIEW

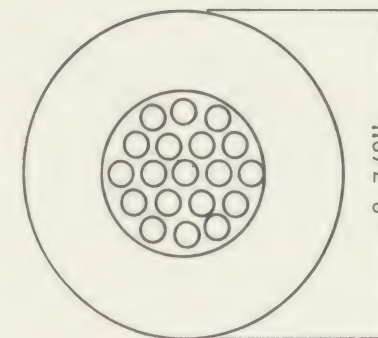


OVERFLOW PORT AND DRAIN FITTING
USES STANDARD 1 1/2" TAILPIECE.


F-14 PLUMBING KIT

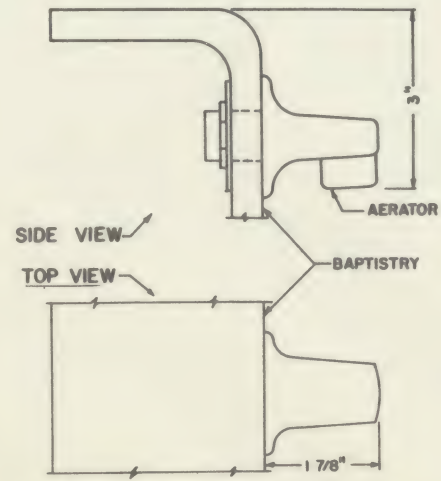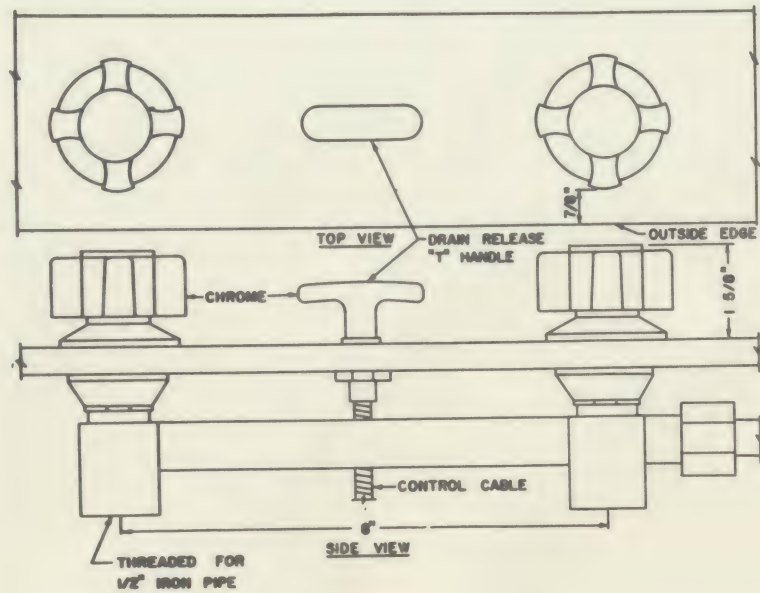

F-50 PLUMBING KIT

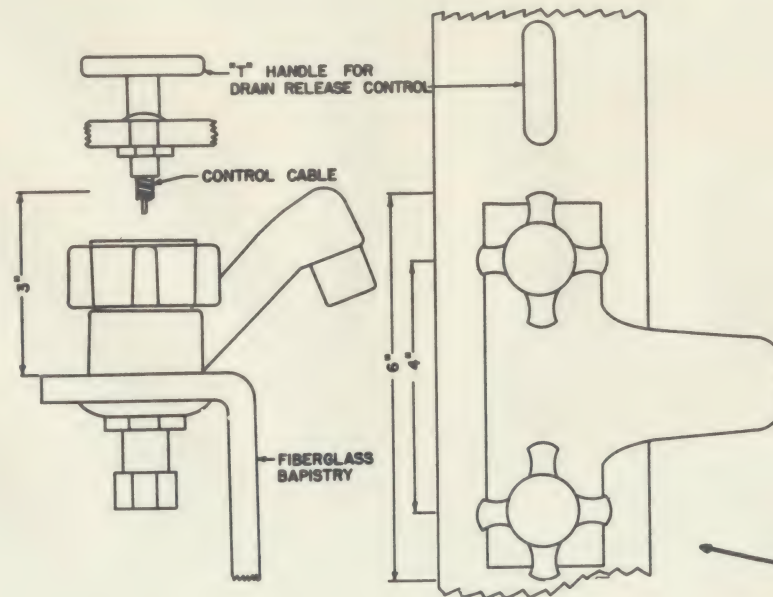


F-40 PLUMBING KIT

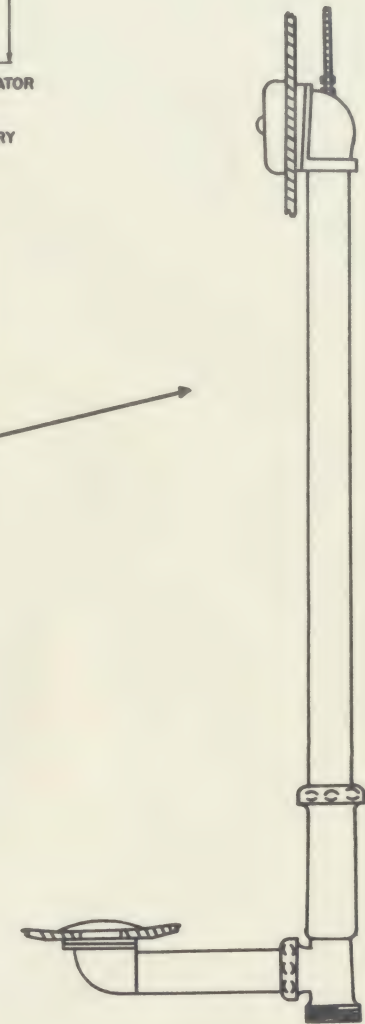


THREADED TAIL-PIECE
1 1/2" COPPER

DRAIN, OVERFLOW
AND DRAIN VALVE
ASSEMBLY

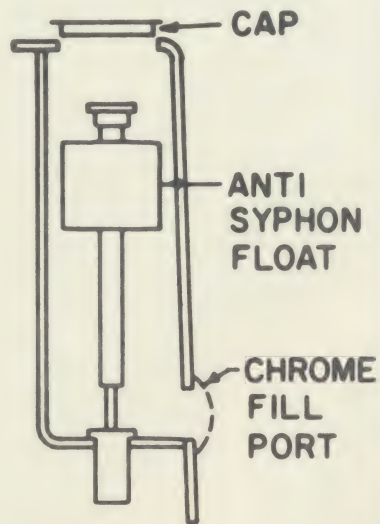

CONCEALED
WATER LEVEL CONTROL

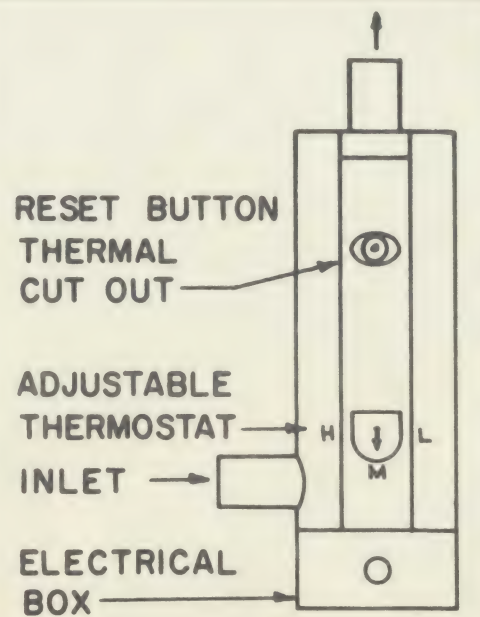

BAPTISTRY ELECTRICAL
WATER HEATER
MODEL 4000 AND 6000



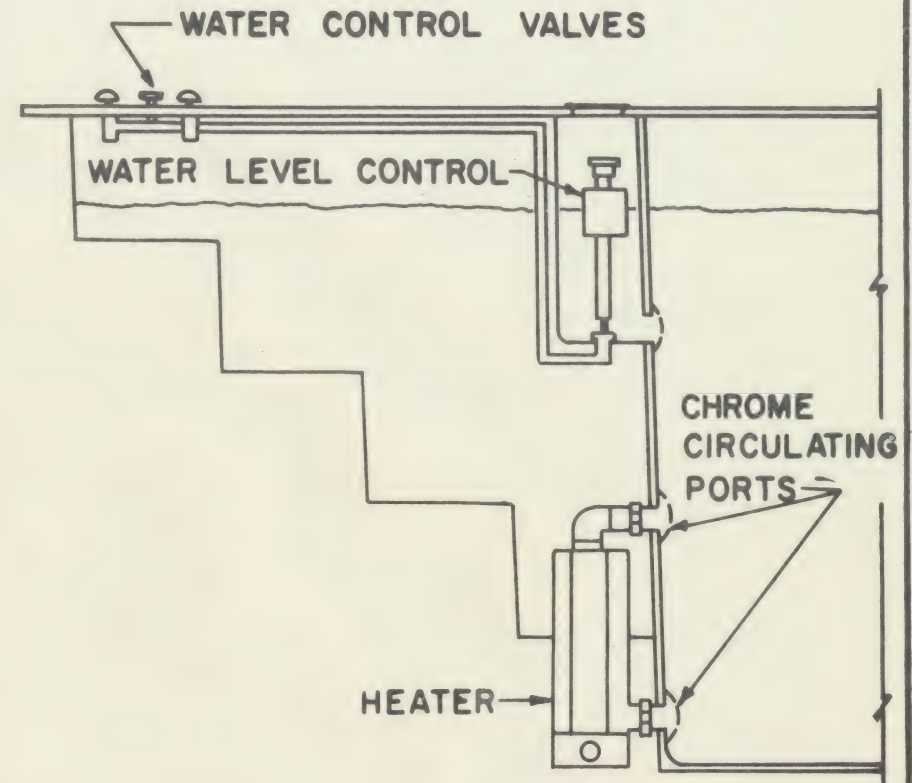



FIG. 3

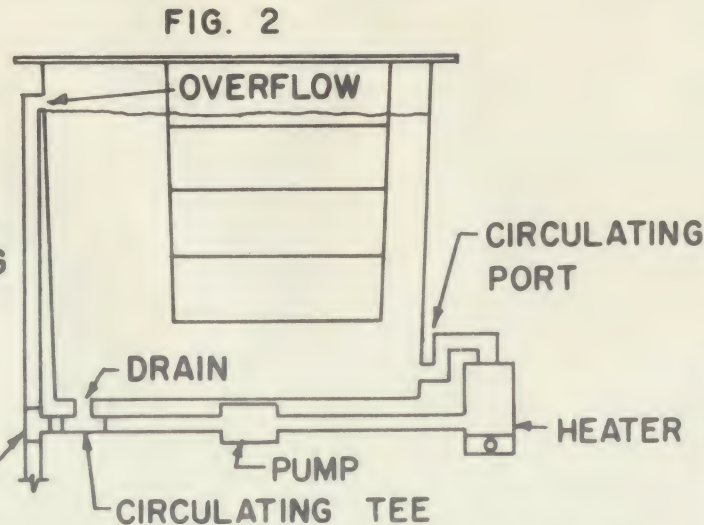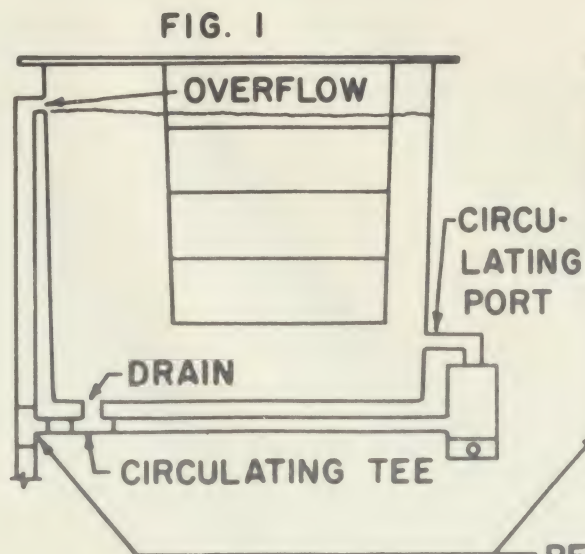


REMOTELY CONTROLLED DRAIN VALVE
TEE IS STANDARD WITH ALL PLUMBING
KITS EXCEPT F-12.

FOR FASTER HEATING TIME,
MORE THAN ONE HEATER
MAY BE INSTALLED.




WATER HEATER AND
WATER LEVEL CONTROL
FOR FIBRLUX MODELS
WIEDEMANN INDUSTRIES, INC.
BOX 672
MUSCATINE, IOWA

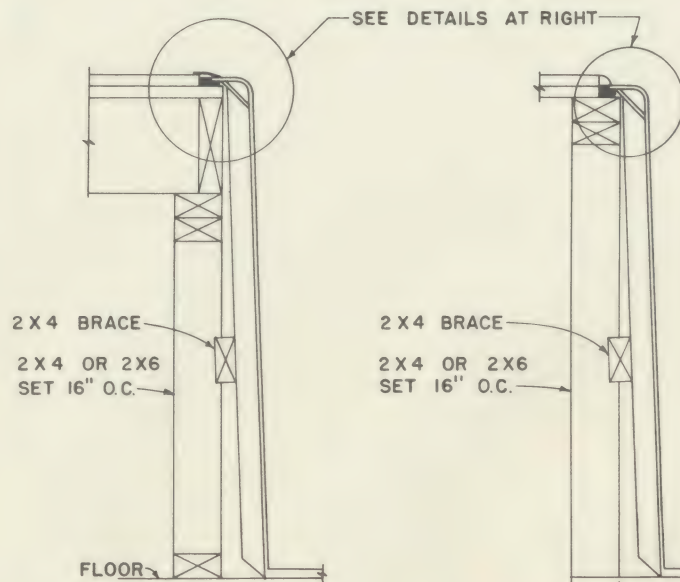

RECESSED INSTALLATION

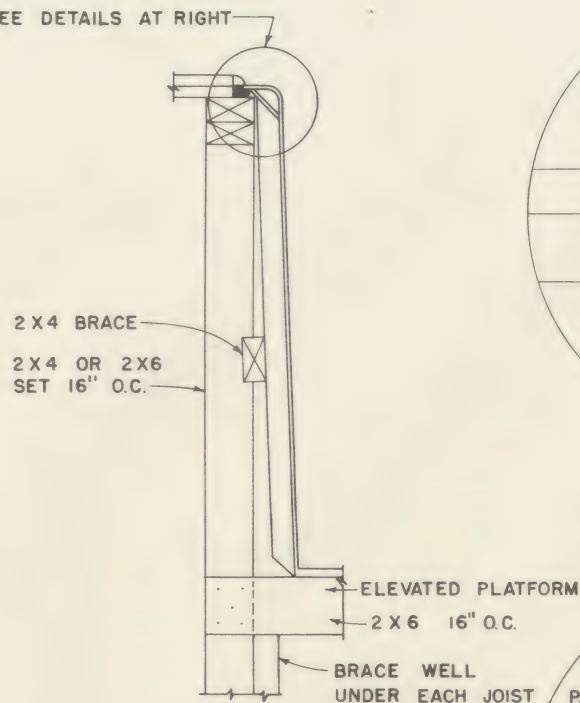


ELEVATED INSTALLATION

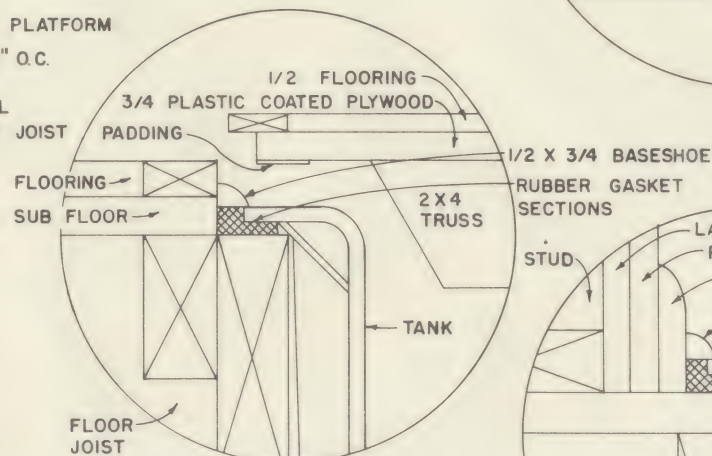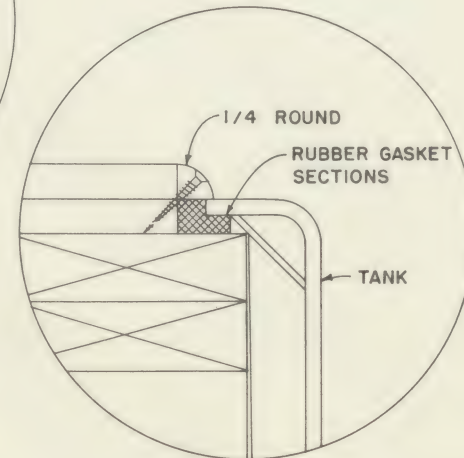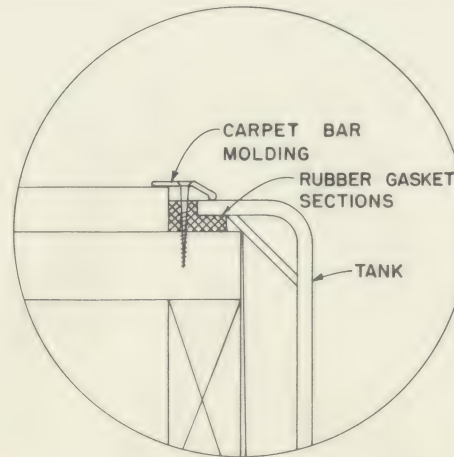


RECESSED INSTALLATION WITH COVER *

*SPECIALLY RECESSED WATER CONTROL FIXTURES ARE REQUIRED FOR THIS TYPE INSTALLATION. SPECIFY WHEN PLACING ORDER.

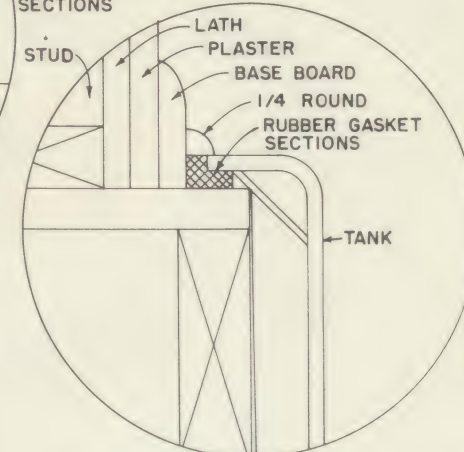

FRAME & PLASTER INSTALLATION

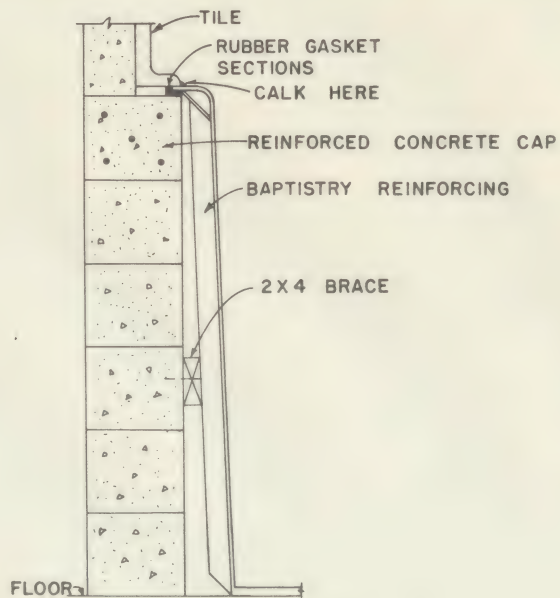

MASONRY INSTALLATION

**METHODS OF INSTALLATION
OF FIBRLUX BAPTISTRY**

WIEDEMANN INDUSTRIES, INC.
BOX 672

PHONE AREA CODE 319 263-6642
MUSCATINE, IOWA



Wiedemann Industries, Inc.

Phone area code 319 - 263-6642

P. O. Box 672

Muscatine, Iowa

FIBERGLASS BAPTISTRIES

Please ship us the following:

January 1, 1966

* FIBERLUX REGAL QUALITY *

- * Satin Finished Interior
- * Rounded Corners
- *** Gently Pitched Floor For Proper Drainage
- *** Recessed Drain Port
- *** Lifetime Skid Resistant Relief Pattern Molded in Floor of Baptistry

- * Lifetime Skid Resistant Relief Pattern Molded into Step Treads
- * Lifetime Molded in Color - Aqua or White
- *** Reinforced Bottom
- *** More Fiberglass Than Most \$900 Boats
- * Accessory Items

* Full Lateral Supports

Style AC-F or BH One Entry ☐ R. H. Ent. (see sketch on reverse side) Color- Aqua or White \$525.00
☐ L. H. Ent.

Style C-1 One entry Color - Aqua or White..... 525.00

Style AB-F-BG or C2 - F2 Two Entry Color - Aqua or White..... 550.00

OPTIONAL ACCESSORIES

Concealed Automatic Water Level Control 34.95
Water Level Control with dual water control valve unit, drain, overflow and drain release unit 74.95
Vision Panel Opening 12" x 72" available on all baptistries, glass not included 35.00
(Indicate location on reverse side)

PLUMBING KITS

Model F 12, single valve, fill port with aerater, drain and overflow fittings 11.95
Model F 40 Prefit, double valve and over the rim fill with aerater unit. Also drain, overflow, and drain release unit 44.95

GAS WATER HEATERS

GWH #8 Raise temperature 35 degrees in eight hours. Heater, Pump, Thermometer, Aquastat.
Shipping wt. 39 lb. Natural or L.P. Gas 127.69
GWH #5 Raise temperature 35 degrees in five hours. Heater, Pump, Thermometer, Aquastat.
Shipping wt. 78 lb. Natural or L.P. Gas 185.81
GWH #3 Raise temperature 35 degrees in three hours. Heater, Pump, Thermometer, Aquastat.
Shipping wt. 150 lb. Natural Gas 251.81
L.P. Gas 259.31

ELECTRIC WATER HEATERS

4 kw, 240 volts with built in thermostat. Two recommended for 35 degree temperature rise in 9 hours 52.00 ea.
2-4kw, 240 volts with built in thermostat and raise temperature 35 degrees in 9 hours (installed) 154.95
6 kw, 240 volts with built in thermostat and raise temperature 35 degrees in 12 hours 94.95
6 kw, 240 volts with built in thermostat and raise temperature 35 degrees in 12 hours (installed) 119.95

For Fully Automatic Water Heater and Other Accessories - See DELUXE Accessories

Please allow 1-3 weeks for delivery.

PRICES F. O. B. MUSCATINE, IOWA

SHIPPING WEIGHT 340 lb.

Terms: 25% down, balance upon delivery.

Name of Church Street


Bill to: Street

Ship to:



City

Signature Title

STYLE AB-F

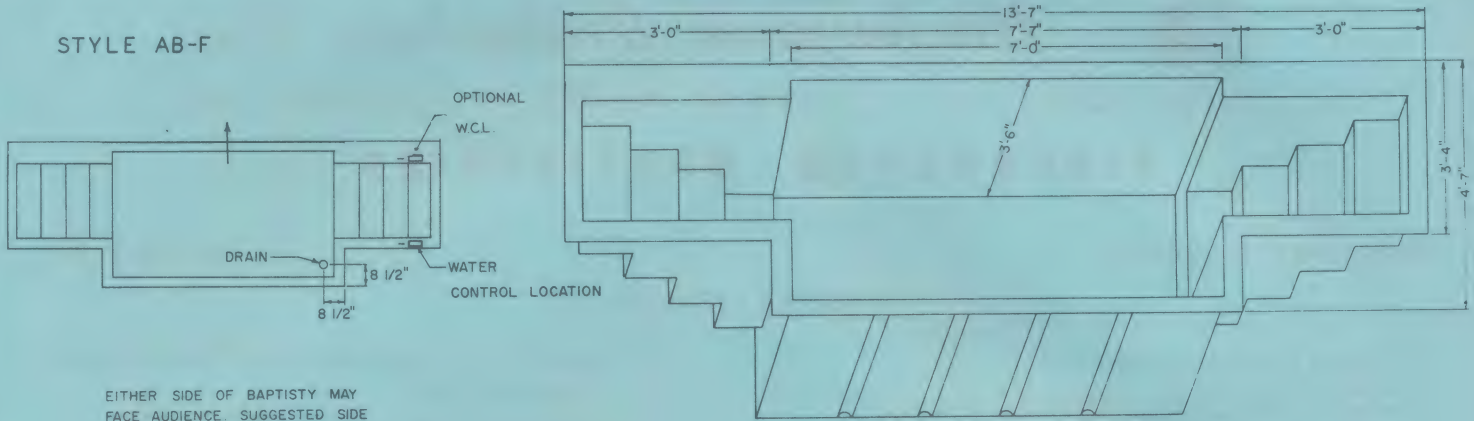

STYLE AC-F

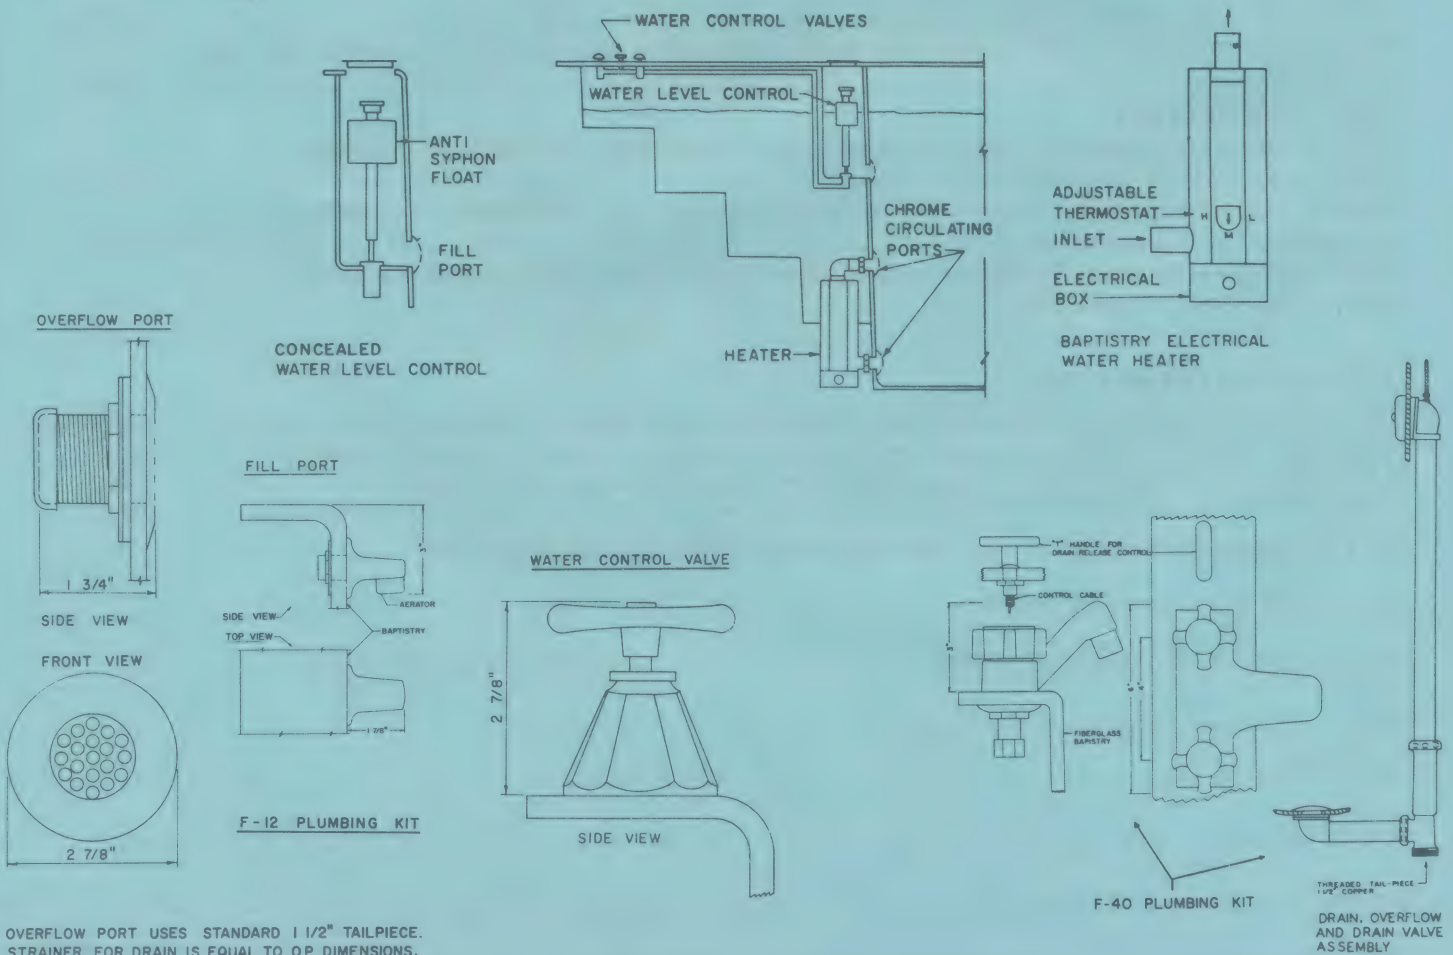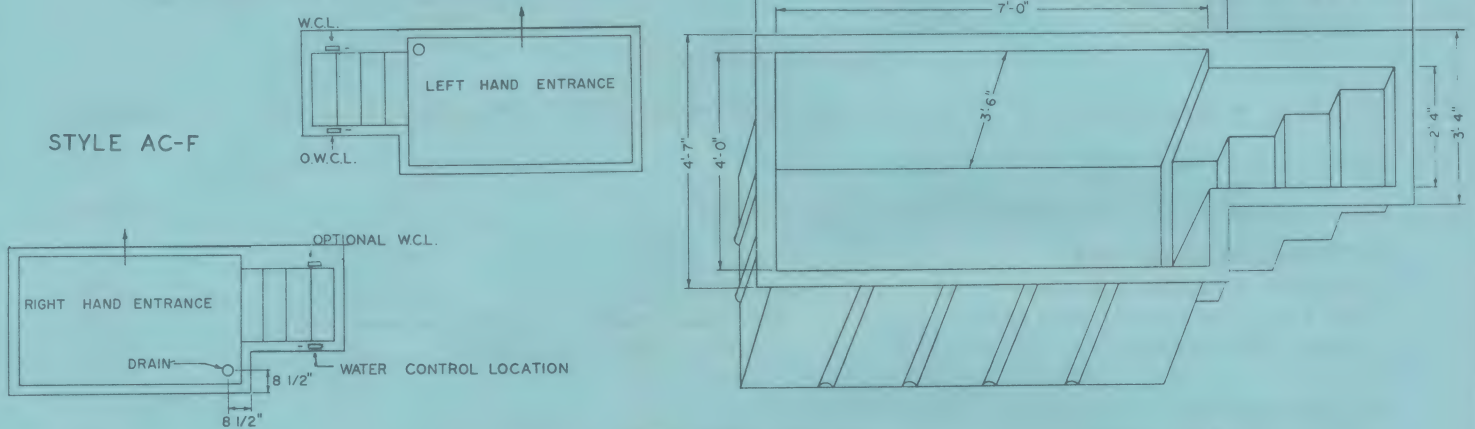

Wiedemann Industries, Inc.

BAPTISTRIES

Box 672

MUSCATINE, IOWA

Phone: Area Code 319 263-6642

June 15, 1966

J. Nelson Systems Consultant
Box 1546
Poughkeepsie, N. Y. 12603

Dear Mr. Nelson:

It was very nice to hear from you and learn of your interest in the WIEDEMANN BAPTISTRIES--the highest quality baptistries available!

Since baptistries are not easily replaced and must last for many years to come, choose your baptistry with care! Select a WIEDEMANN BAPTISTRY--one that has all of the important features such as solidly reinforced floor, design accommodation for proper drainage, molded in skid resistant relief pattern in the floor as well as step treads, also accessories designed to complement the baptistry.

Because of the bonus features offered only by WIEDEMANN INDUSTRIES, INC., superior materials and years of baptistry building experience, WIEDEMANN INDUSTRIES, INC., guarantees their baptistries to be unmatched in quality, workmanship and design.

Please refer to prices listed. WIEDEMANN BAPTISTRIES are priced in several groups. Prices are determined in proportion to labor and material costs.

Our low priced FIBRLUX REGAL will far exceed in quality, design and material any other baptistry available in this price range.

We would be happy to hear from you further and to assist you with your baptistry needs. If you have questions or feel that you would like to discuss something with me personally, feel free to call collect, we are as near to you as your telephone.

Sincerely,

WIEDEMANN INDUSTRIES, INC.

Martin F. Wiedemann, Jr.

Martin F. Wiedemann, Jr.



MFW/ba



Wiedemann Industries, Inc.

Phone area code 319 — 263-6642

P. O. Box 672

Muscatine, Iowa

FIBERGLASS BAPTISTRIES

PRICE LIST NO. 12

Please ship us the following:

January 1, 1966

DELUXE MODELS

SPECIFICATIONS:

Deluxe quality baptistries shall be of UNIT-MOLDED, FIBERSTRESSED fiberglass construction, and shall be constructed of top quality fiberglass and polyester resins. Baptistry tread areas shall be equipped with molded in, smoothly rounded knobular skid resistant relief pattern on both steps and floor, gently sloping floor and recessed drain for complete drainage. Baptistry shall be equipped with built in lateral supports and shall be free standing requiring no extra lateral supports when filled with water. Baptistry shall be equipped with LEVELING SKID and solidly reinforced floor. Interior shall be finished in top quality, lustrous, high-gloss, snow-white, porcelain-like, polyester gel-coat. All corners shall be smoothly rounded for safety. Baptistry shall be equipped with quality chrome-plated hot and cold water control valves, fill-port, drain release, and drain and overflow unit. Plumbing fixtures shall be pre-set and tested.

With reasonable care, life expectancy is unlimited.

NOTE: steps can be located as desired.

DELUXE GROUP

Model	Average Fiberglass Laminates Thickness	Ultimate flex-ural load in lb. per in. of laminate width	Tensile load in lb. per in. of laminate width	Warranty
Deluxe Special	.270	1,848	2,794	60 mo.
Deluxe Master	.240	1,668	2,454	36 mo.
Deluxe	.200	1,299	1,936	24 mo.

PRICES

- * Deluxe, Style AB, BG & C-2, White or Aqua \$1,039.00 ☐
- Style AC, BH & C-1, White or Aqua 985.00 ☐
- Style AT & AL, White or Aqua 1,050.00 ☐
- Other Standard Pastel Colors, additional 39.95 ☐
- * Deluxe Master, Style AB, BG & C-2, White or Aqua ... \$1,210.00 ☐
- Style AC, BH, & C-1, White or Aqua .. 1,156.00 ☐
- Style AT, & AL, White or Aqua 1,221.00 ☐
- Other Standard Pastel Colors, Additional . 39.95 ☐
- * Deluxe Special, Style AB, BG, & C-2, White or Aqua \$1,459.00 ☐
- Style AC, BH, & C-1, White or Aqua ... 1,395.00 ☐

FIBRLUX MODELS

SPECIFICATIONS:

Fibrlux baptistries shall be of unit-molded, fiber-stressed, fiberglass construction, and shall be constructed of quality fiberglass and polyester resins. Baptistry tread areas shall be equipped with molded in, smoothly rounded knobular skid resistant relief pattern on both steps and floor, gently sloping floors and recessed drain for complete drainage. Baptistry shall be equipped with built in lateral supports and shall be free standing requiring no extra lateral supports when filled with water. Baptistry shall have solidly reinforced floor. Interior of baptistry shall be finished in smooth, high-gloss, white polyester gel-coat. ALL corners shall be smoothly rounded for safety.

With reasonable care, life expectancy is unlimited.

NOTE: Available in style AB, AC, BG, and BH.

FIBRLUX GROUP

Model	Average Fiberglass Laminates Thickness	Ultimate flex-ural load in lb. per in. of laminate width	Tensile load in lb. per in. of laminate width	Warranty
Fibrlux Supreme	.193	1,096	1,866	24 mo.
Fibrlux Imperial	.185	1,036	1,838	18 mo.
Fibrlux	.174	824	1,473	12 mo.

PRICES

- * Fibrlux, Style AB, BG & C-2, White or Aqua \$650.00 ☐
- Style AC, BH & C-1, White or Aqua 620.00 ☐
- Other Standard Pastel Colors, Additional 39.95 ☐
- * Fibrlux Imperial, Style AB, BG & C-2, White or Aqua ... 765.00 ☐
- Style AC, BH & C-1, White or Aqua ... 729.00 ☐
- Other Standard Pastel Colors, Additional . 39.95 ☐
- * Fibrlux Supreme, Style AB, BG & C-2, White or Aqua ... 894.00 ☐
- Style AC, BH & C-1, White or Aqua ... 836.00 ☐
- Other Standard Pastel Colors, Additional . 39.95 ☐

FIBRLUX MODEL ACCESSORIES

Style AT & AL, White or Aqua..... 1,480.00 ☐

Note: Deluxe Special prices include choice of pastel colors or white and deluxe control fixtures.

DELUXE MODEL ACCESSORIES

DELUXE controls Dial-size system with clear Lucite knobs . . . 24.95 ☐

PICTURE WINDOW — Atlasite crystal (guaranteed leakproof)

Available on either side of baptistry

6' x 1' x 3/8" for all "A" & "C" styles 225.00 ☐

6' x 1'6" x 1/2" for all "A" & "C" styles 298.35 ☐

4' x 1'6" x 3/8" for all "B" styles 225.00 ☐

ELECTRIC HEATERS: Model AP 6 - Pre fit Fully Automatic with built in CIRCULATING PUMP 3rd sensitivity.

Adjustable thermostat, low water on-off safety switch.

Thermal protector switch, indicator light, 3" pigtail, light

weight. Fits below bottom step. Easily detached for service. 6kw 25 amp 240 volts. \$199.50 ☐

GAS HEATERS — Heater, pump, thermometer and aquastat included (for remote installation).

Model GWH8, raise temp. 35° in 8 hr. 127.69 ☐

Model GWH5, raise temp. 35° in 5 hr. 185.81 ☐

WATER LEVEL CONTROL—Concealed heavy copper compartment. All parts replaceable. Also includes chrome cover and fill port 79.95 ☐

BUILT-IN UNDER WATER LIGHTING 149.50 ☐

42" WIDE STEPS, add to base price, each entrance 40.00 ☐

Example: Style AC with wide steps = Style ACW.

2-CIRCULATING PORTS AND ADAPTERS —

For heaters remote from baptistry 20.00 ☐

(Not necessary for use with built-in heaters)

FOR STEPS ON CORNER—with no offset, each entrance . . 30.00 ☐

PICTURE WINDOW — Atlasite crystal (guaranteed leakproof)

Available on either side of baptistry.

5' x 9'4 x 3/8" 155.00 ☐

6' x 1' x 3/8" 189.00 ☐

PLUMBING KITS

Model F12, single valve, fill port with aerater, drain and overflow fittings 11.95 ☐

Model F40, double valve and over the rim fill with aerater unit. Also drain, overflow and drain release unit . . 44.95 ☐

Model F50, quality double valve and choice of over the rim fill ☐ or under the rim fill ☐ with aerater installed on baptistry, also includes prefit drain, overflow and drain release unit. (model F50 also designed to be used with water level control or recessed plumbing). 54.95 ☐

WATER LEVEL CONTROL—concealed fiberglass compartment. Also includes chrome cover and fill port 59.95 ☐

WATER HEATER, electric, thermostatically controlled with thermal low water safety device. For installation remote from

baptistry. For gravity or pump feed use:

Model 4000, 4kw 240 V., 17 amp.—raise temp. 35° in 18 hours 78.75 ☐

Model 6000, 6kw 240 V., 25 amp.—raise temp. 35° in 12 hours 99.50 ☐

Model 4000 and 6000 installed on Baptistry — includes 2 chrome circulating ports 25.00 ☐

FOR FULLY AUTOMATIC WATER HEATER SEE DELUXE PRICE LIST

BUILT-IN or GAS HEATERS — See Deluxe price list.

ELECTRIC CIRCULATING PUMP 45.00 ☐

CIRCULATING PORTS, each 3.50 ☐

PRICES ARE F.O.B. MUSCATINE, IOWA, AND SUBJECT TO CHANGE WITHOUT NOTICE

Shipping Weight 350 to 700 lbs. Depending on Model and Accessories.

Date

Name of Church Street


Bill To: Ship To:

Street Street

City City

Signature Title

Wylam Baptist Church

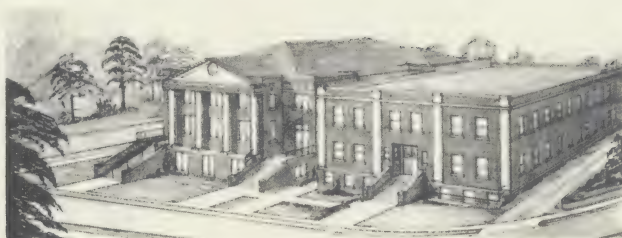

P.O. BOX 7016, WYLAM
BIRMINGHAM 14, ALABAMA

October 4, 1963


Wiedmann Industries, Inc.
Box 672
Muscatine, Iowa

Dear Mr. Wiedmann:

I would like to express to you and your Company how delighted we continue to be with the Fiberglass Baptistry which we ordered from you. I feel that this is a wonderful contribution to churches using this mode of baptism. I am grateful to God that He gave you the idea of manufacturing this type of equipment. I greatly recommend it to any pastor who might be preparing a new baptistry.

I thought you might like to get this word from a church that is more than delighted with your merchandise.

Sincerely yours,

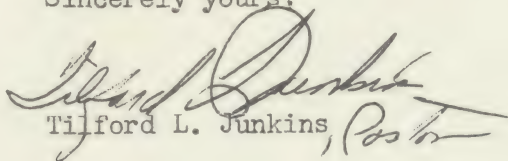
Tilford L. Jenkins, Pastor

TLJ:ia

WASHINGTON SANITARIUM CHURCH
TAKOMA PARK, MARYLAND

February 25, 1964

Wiedemann Industries, Inc.
Box 672
Muscatine, Iowa

Dear Friends:


Just a word to thank you for your excellent service and the beautiful baptistry which we have installed and has been used in one baptismal service. Many have said that it is the most beautiful baptistry they have seen.

Through the years I have witnessed the problems which have accompanied some of the "home-made" varieties which have been made of metal, cement, tile, etc. It is a real joy to be possessors of a one piece laminated unit. It has permanance which we appreciate.

If you have interested parties here in the vicinity who would like to see our baptistry, send them around. We shall be glad to show it to them.

Sincere thanks for a job well done.


Sincerely,


R. Quackenbush, Pastor^B
Washington Sanitarium Church

RQ:bc

35c
Wi

FIBERGLASS BAPTISTRIES

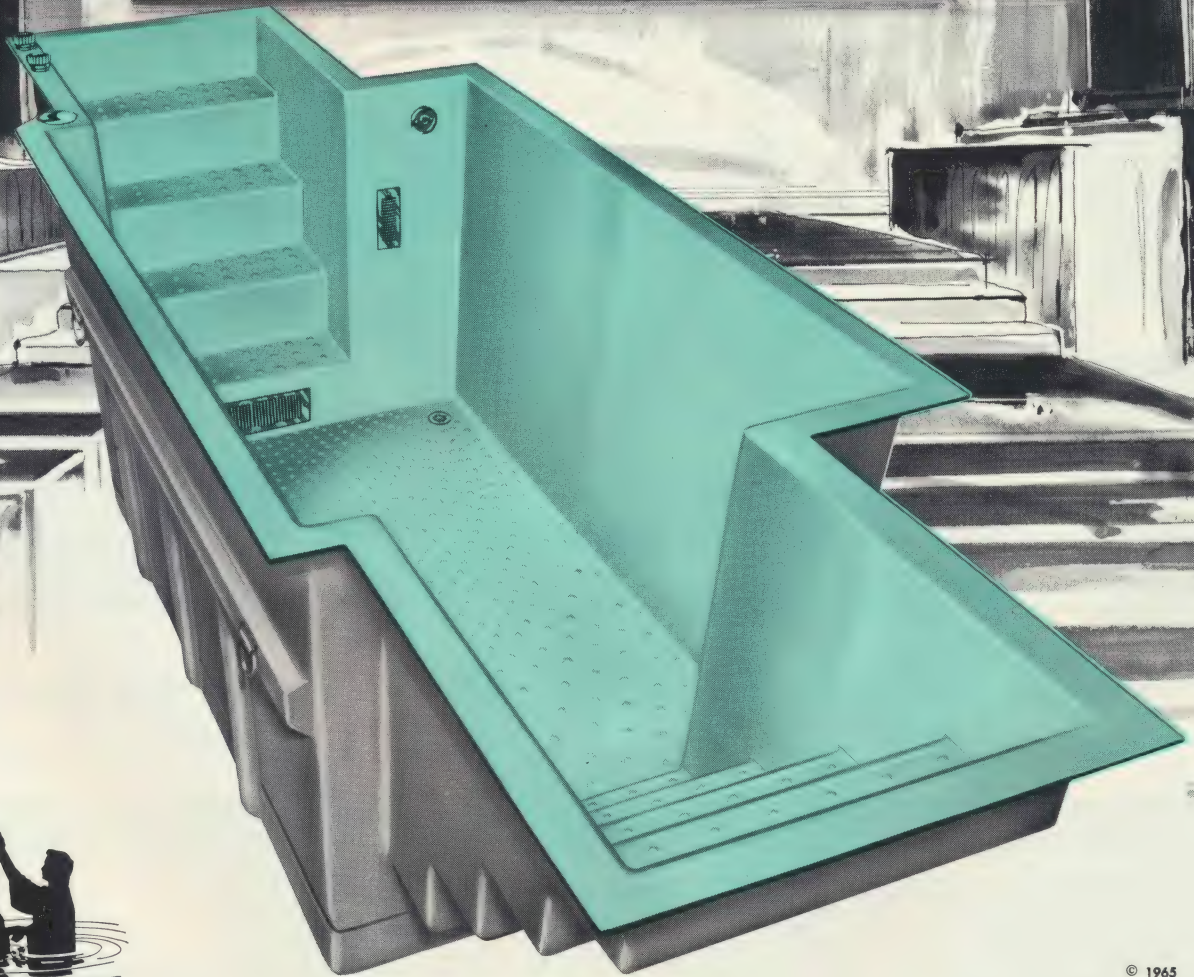

© 1965
by Wiedemann Industries, Inc.

PRODUCTS OF

Wiedemann Industries, Inc.

Patents and Patents Pending





P. O. Box 672

Muscataine, Iowa

ORIGINATOR OF THE FIBERGLASS BAPTISTRY AND LEADING BAPTISTRY SPECIALIST

BONUS FEATURES

OFFERED ONLY IN A WIEDEMANN FIBERGLASS BAPTISTRY
DIMENSIONS



◀ Skid-resistant decorative relief pattern on steps and floor is gentle to the touch.

- Solid floor area fully re-inforced.

◀ Molded-in, recessed drain port and slightly pitched floor for complete drainage.

- Corners gently rounded for safety and beauty.

◀ Chrome fill port tumbles water in with whisper-like action — no gushing or roaring.

- Rich lustrous interior finish molded-in for a lifetime of beauty.

◀ Picture window glazed with clear Atlasite crystal. Many times stronger than plate glass . . . it is virtually scratch resistant and will never discolor.


- Superior raw materials.

◀ Unit molded — no seams or joints.


- Exclusive FIBERSTRESSING Process* — for a lifetime of maintenance-free service.

◀ Built-in full lateral re-inforcing.


- Lightweight, easy to install — ready to set in place.

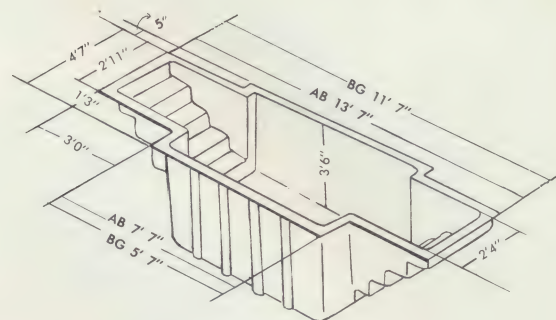

Style BG, 11' 7" in length

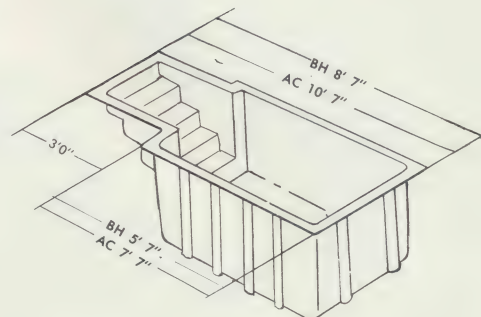

Style BH, 8' 7" in length

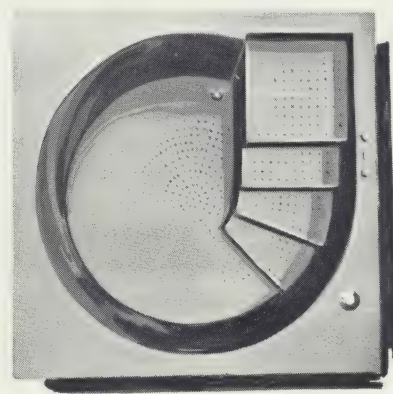


STYLE R-1 6' 8" x 6' 8" 3' 6" DEEP

**ITS NEW! THE Wiedemann
ROUND BAPTISTRY**



* FIBERSTRESSING

. . . an exclusive process of interlaminar bridging developed by WIEDEMANN INDUSTRIES, INC. The superior strength qualities of Fiberstressing eliminates many heavy external re-inforcing members . . . reduces shipping weight . . . increases job-handling ease.

**INCREASES IMPACT
STRENGTH 52%**

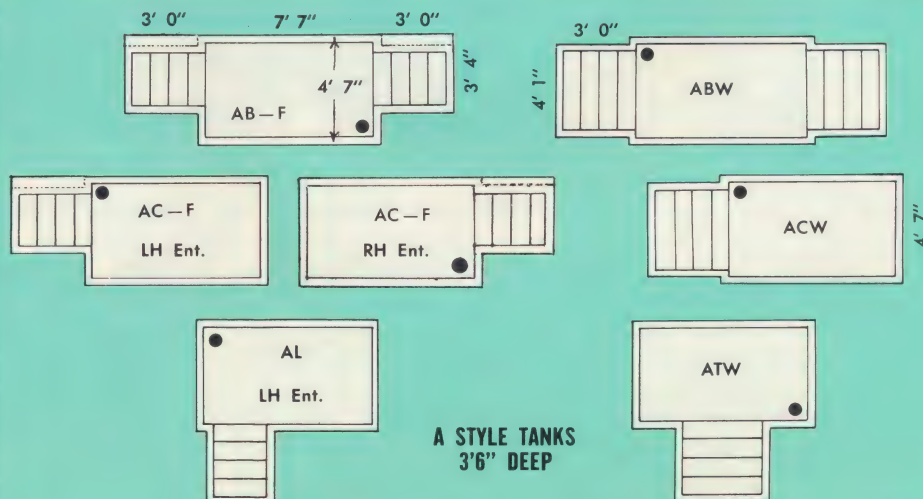


INSTALLATION DETAILS for DELUXE MODELS

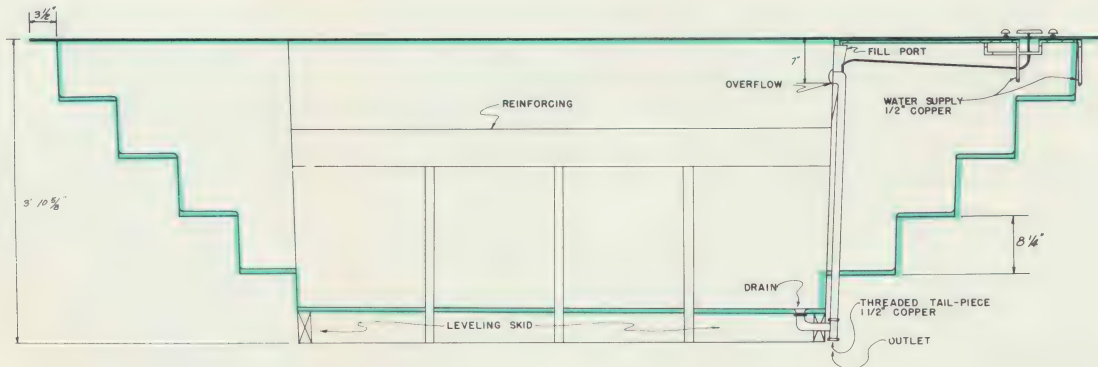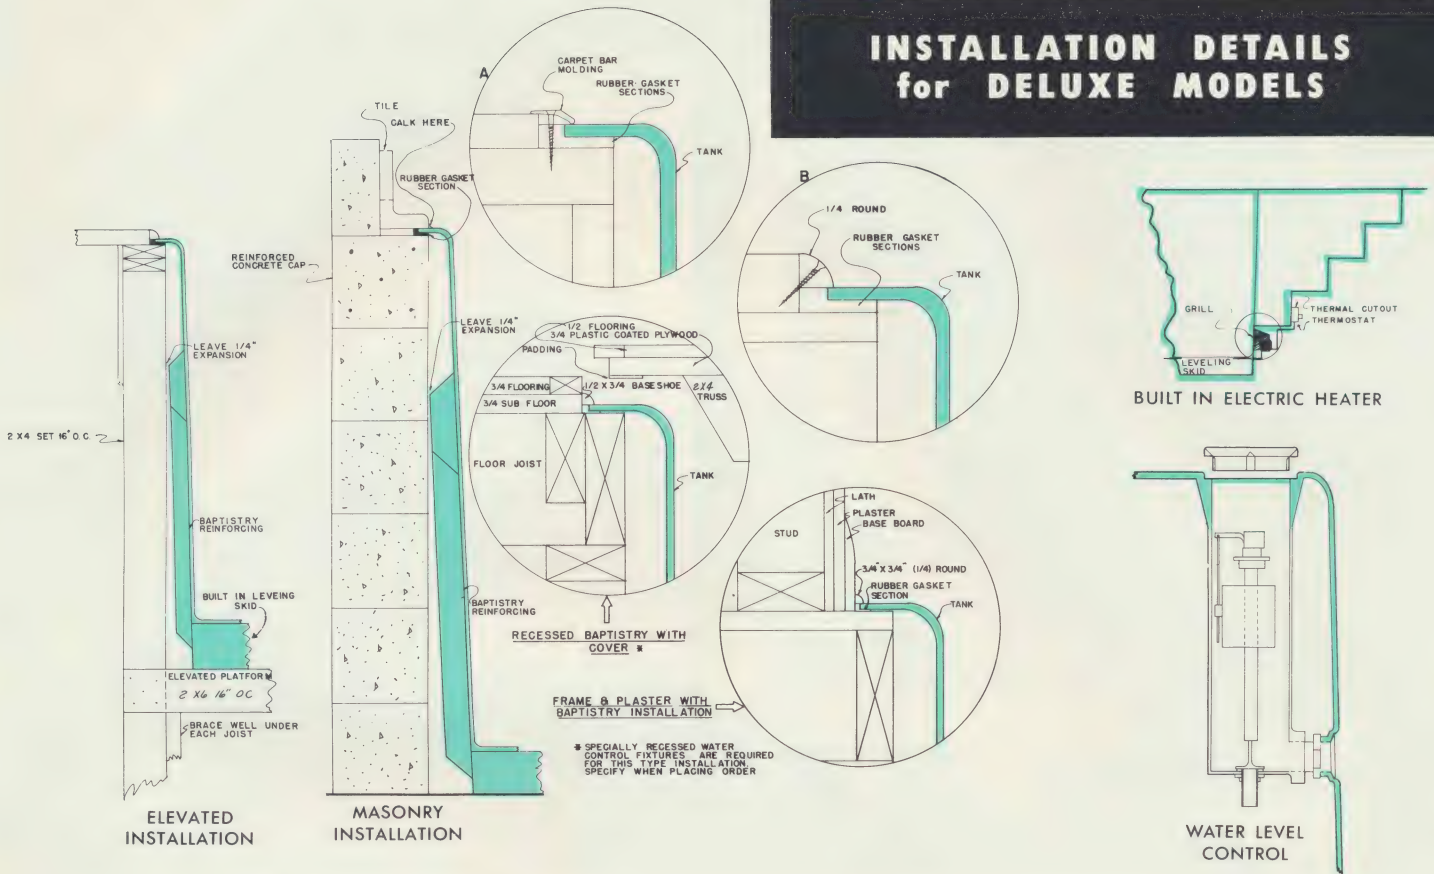

PROFILE — DELUXE BAPTISTRY showing leveling skid and built in plumbing

SUGGESTED STEP ARRANGEMENTS

Other arrangements upon request

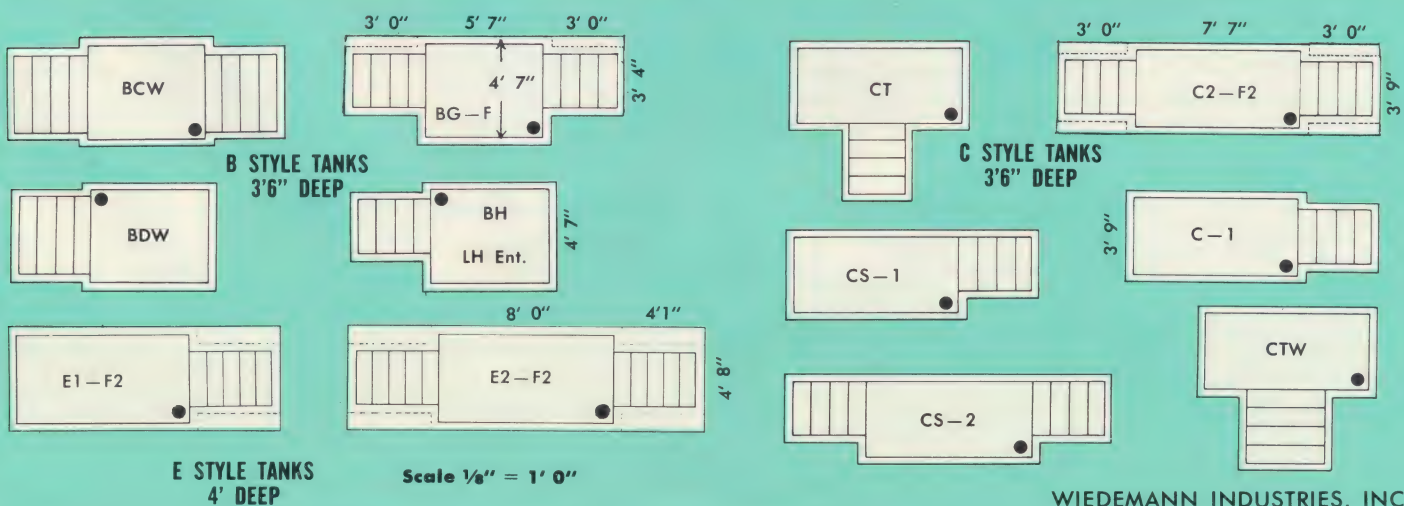

SPECIFICATIONS

DELUXE MODELS

Deluxe quality baptistries shall be of UNIT-MOLDED, FIBERSTRESSED fiberglass construction, and shall be constructed of top quality fiberglass and polyester resins. Baptistry tread areas shall be equipped with molded in, smoothly rounded knobular skid resistant relief pattern on both steps and floor, gently sloping floor and recessed drain for complete drainage. Baptistry shall be equipped with built in lateral supports and shall be free standing requiring no extra lateral supports when filled with water. Baptistry shall be equipped with LEVELING SKID and solidly reinforced floor. Interior shall be finished in top quality, lustrous, high-gloss, snow-white, porcelain-like, polyester gel-coat. All corners shall be smoothly rounded for safety. Baptistry shall be equipped with quality chrome-plated hot and cold water control valves, fill-port, drain release, and drain and overflow unit. Plumbing fixtures shall be pre-set and tested.

With reasonable care, life expectancy is unlimited.

NOTE: Steps can be located as desired.

DELUXE GROUP

Model	Average			Ultimate flex- ural load in lb. per in. of Laminate width	Tensil load in lb. per in. of laminate width	Guar- antee
	Laminate Thickness					
	Bottom	Body	Stress Areas			
Special	1-1/8"	3/8"	3/4"	9,552	5,340	35 year
Master	1"	5/16"	9/16"	7,960	4,450	30 year
Deluxe	13/16"	1/4"	9/16"	6,368	3,560	25 year

OPTIONS

Three options are available in the Deluxe Group of Wiedemann Baptistries. Deluxe, Deluxe Master and Deluxe Special — with white and pastel colors available. Deluxe Special includes choice of pastel colors or white and deluxe control fixtures at no additional charge. For differences in fiberglass laminate thickness, ultimate flexural load, tensil load and Wiedemann warranty, refer to the above chart.

ACCESSORIES

Choices of accessories available for the Deluxe Group are as follows:

PASTEL COLORS — Choice of exquisite colors available for all models.

DELUXE CONTROLS — Optional Dial-eze system with clear Lucite knobs.

PICTURE WINDOW — Atlasite crystal (guaranteed leakproof) available on either side of baptistry in the following sizes:

6' x 1'6" x 1/2"

6' x 1' x 3/8"

5' x 9" x 3/8"

4' x 1'6" x 3/8" (4' size for B styles)

HEATERS — Built in electric fully automatic 6kw, 25 amp, 240 volt, single phase. Raise temperature 35° in 8 hours with low water cut-out protector. Electric heaters available with either thermostat control single compartment or thermostat control dual compartment. Remote installation Gas heaters also available in Model GWH8, which raises temp. 35° in 8 hrs. or Model GWH5, which raises temp. 35° in 5 hrs.

OTHER OPTIONAL FEATURES — Include water level control, built in under water lighting, 42" wide steps and circulating ports and adapters.

FIBRLUX MODELS

Fibrlux baptistries shall be of unit-molded, fiber-stressed, fiberglass construction, and shall be constructed of quality fiberglass and polyester resins. Baptistry tread areas shall be equipped with molded in, smoothly rounded knobular skid resistant relief pattern on both steps and floor, gently sloping floors and recessed drain for complete drainage. Baptistry shall be equipped with built in lateral supports and shall be free standing requiring no extra lateral supports when filled with water. Baptistry shall have solidly reinforced floor. Interior of baptistry shall be finished in smooth, high-gloss, white polyester gel-coat. ALL corners shall be smoothly rounded for safety.

With reasonable care, life expectancy is unlimited.

NOTE: Available in style AB, AC, BG, and BH.

FIBRLUX GROUP

Model	Average			Ultimate flex- ural load in lb. per in. of Laminate width	Tensil load in lb. per in. of laminate width	Guar- antee
	Laminate Thickness		Stress Areas			
	Bottom	Body				
Supreme	13/16"	1/4"	9/16"	6,128	3,445	25 year
Imperial	3/4"	1/4"	1/2"	5,944	3,280	20 year
Fibrlux	3/4"	7/32"	7/16"	5,572	3,115	15 year
Regal	1/2"	3/16"	3/8"	4,776	2,670	10 year

OPTIONS

Three options are available in the Fibrlux Group of Wiedemann Baptistries. Fibrlux, Fibrlux Imperial or Fibrlux Supreme with white and pastel colors available. For differences in fiberglass laminate thickness, ultimate flexural load, tensil load and Wiedemann warranty, refer to the above chart.

ACCESSORIES

Choices of accessories available for the Fibrlux Group are as follows:

PASTEL COLORS — Choice of exquisite colors available for all models.

PICTURE WINDOW — Atlasite crystal (guaranteed leakproof) available on either side of baptistry in the following sizes:

6' x 1'6" x 1/2"

6' x 1' x 3/8"

5' x 9" x 3/8"

4' x 1'6" x 3/8" (4' size for B styles)

PLUMBING KITS — Model F12, single valve, fill port with aerater, drain and overflow fittings or Model F40, double valve and over the rim fill with aerater unit. Also drain, overflow, and drain release unit.

HEATERS — Built in electric fully automatic 6kw, 25 amp, 240 volt, single phase. Raise temperature 35° in 8 hrs. with low water cut-out protector. Electric heaters are equipped with thermostat control single compartment. Also available for remote installation — Model 4000, 4kw, 240 volt, 17 amp — raise temperature 35° in 18 hrs. or Model 6000, 6kw, 240 volt, 25 amp — raise temperature 35° in 12 hours. Remote installation Gas heaters also available in Model GWH8, which raises temp. 35° in 8 hrs. or Model GWH5, which raises temperature 35° in 5 hrs.

OTHER OPTIONAL FEATURES — Include electric circulating pump and circulating ports.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Protected by Patents and Patents Pending

Write or call collect
for information and
complete Architect Kit

Phone area code 319
263-6642



FIBERGLASS BAPTISTRIES BY






Wiedemann Industries, Inc.

P. O. Box 672

Muscatine, Iowa

BONUS FEATURES

OFFERED ONLY IN A WIEDEMANN FIBERGLASS BAPTISTRY
DIMENSIONS



◀ Skid-resistant decorative relief pattern on steps and floor is gentle to the touch.

• Solid floor area fully re-inforced.

◀ Molded-in, recessed drain port and slightly pitched floor for complete drainage.

• Corners gently rounded for safety and beauty.

◀ Chrome fill port tumbles water in with whisper-like action — no gushing or roaring.

• Rich lustrous interior finish molded-in for a lifetime of beauty.

◀ Picture window glazed with clear Atlasite crystal. Many times stronger than plate glass . . . it is virtually scratch resistant and will never discolor.


• Superior raw materials.

◀ Unit molded — no seams or joints.


• Exclusive FIBERSTRESSING Process* — for a lifetime of maintenance-free service.

◀ Built-in full lateral re-inforcing.


• Lightweight, easy to install — ready to set in place.

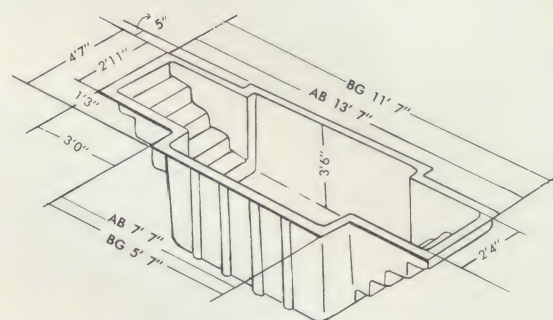

Style BG, 11'7" in length

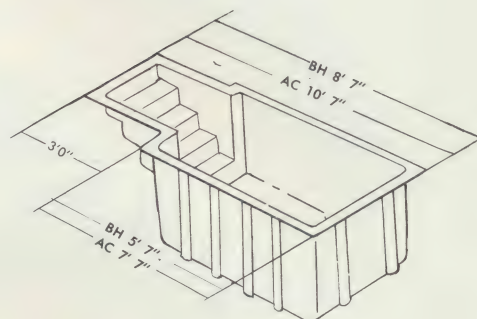

Style BH, 8'7" in length

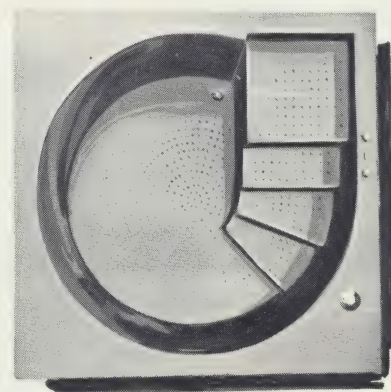


STYLE R-1 6'8" x 6'8" 3'6" DEEP

**ITS NEW! THE Wiedemann
ROUND BAPTISTRY**



*FIBERSTRESSING

. . . an exclusive process of interlaminar bridging developed by WIEDEMANN INDUSTRIES, INC. The superior strength qualities of Fiberstressing eliminates many heavy external re-inforcing members . . . reduces shipping weight . . . increases job-handling ease.

**INCREASES IMPACT
STRENGTH 52%**

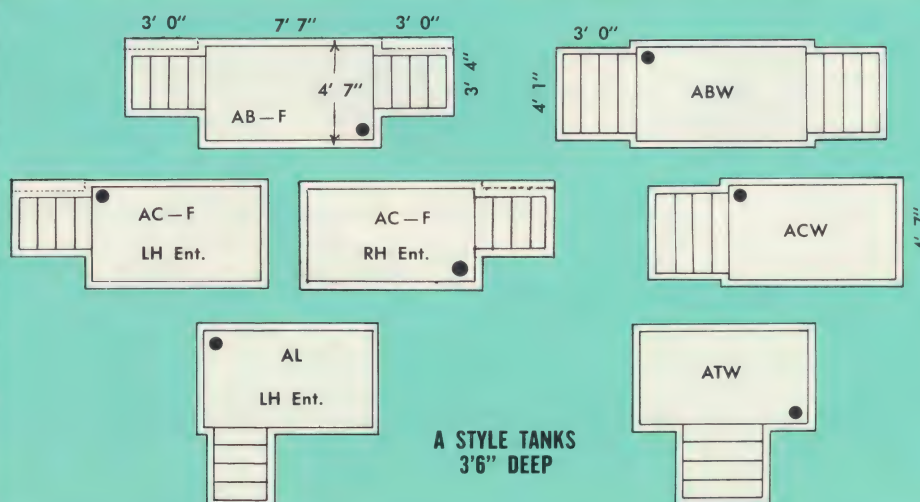


INSTALLATION DETAILS for DELUXE MODELS

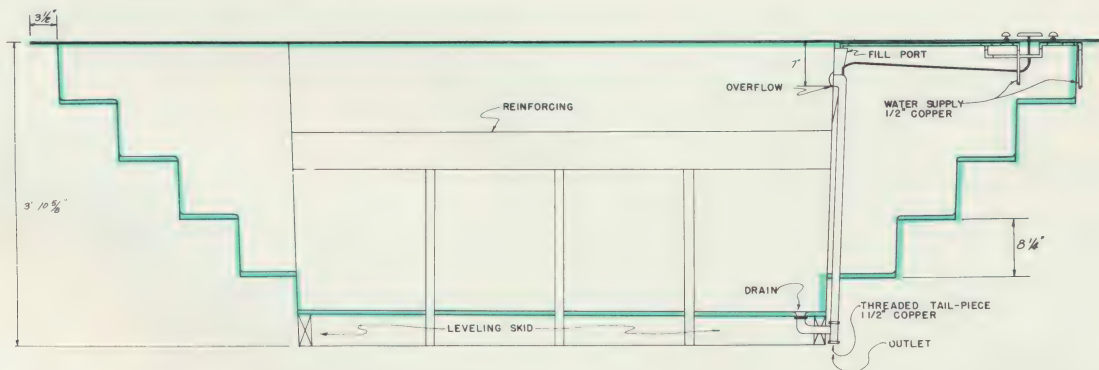
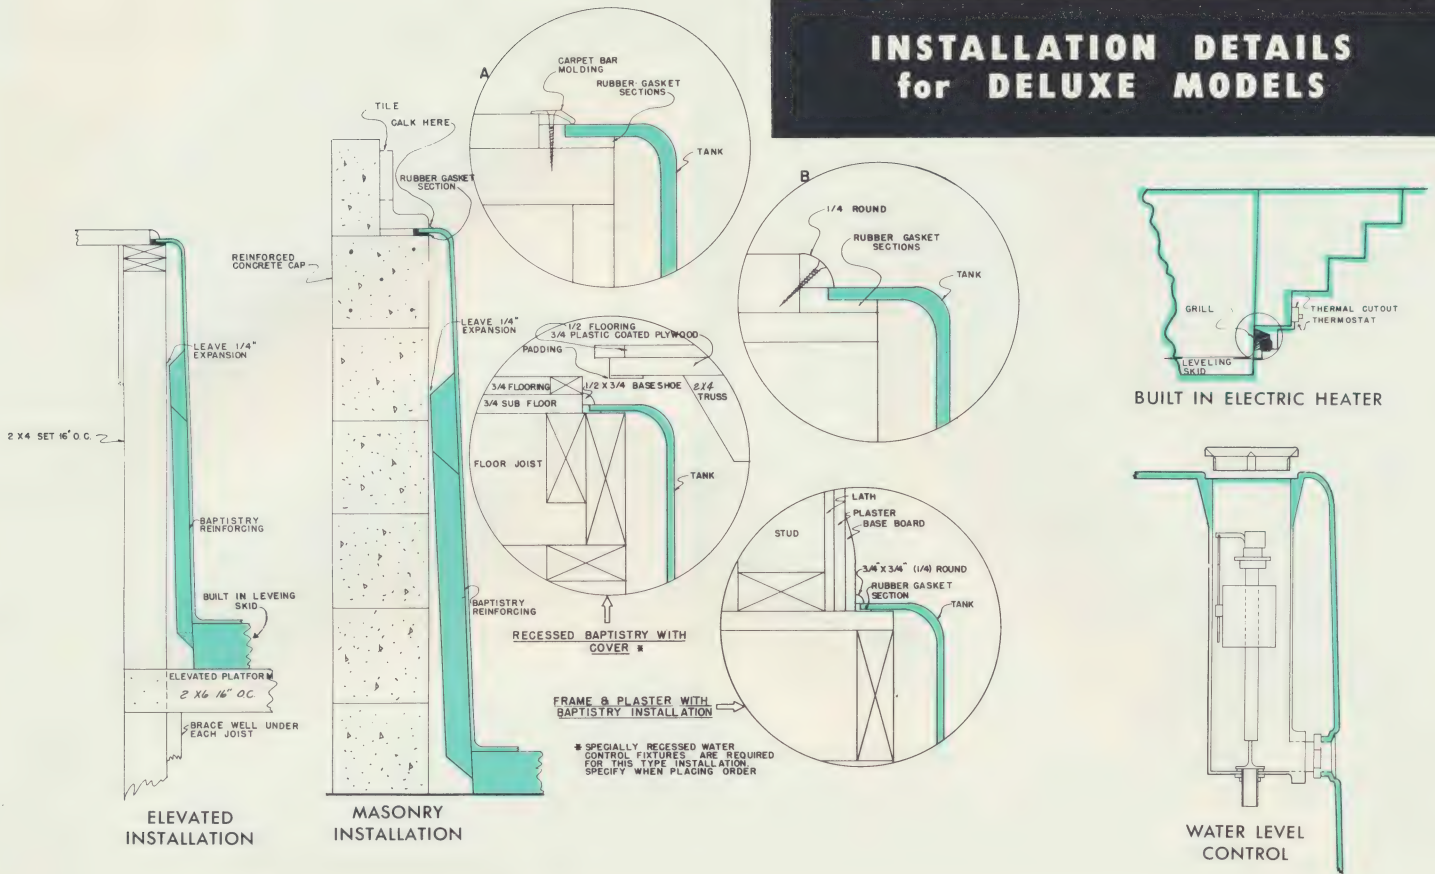


PROFILE — DELUXE BAPTISTRY showing leveling skid and built in plumbing



SUGGESTED STEP ARRANGEMENTS

Other arrangements upon request


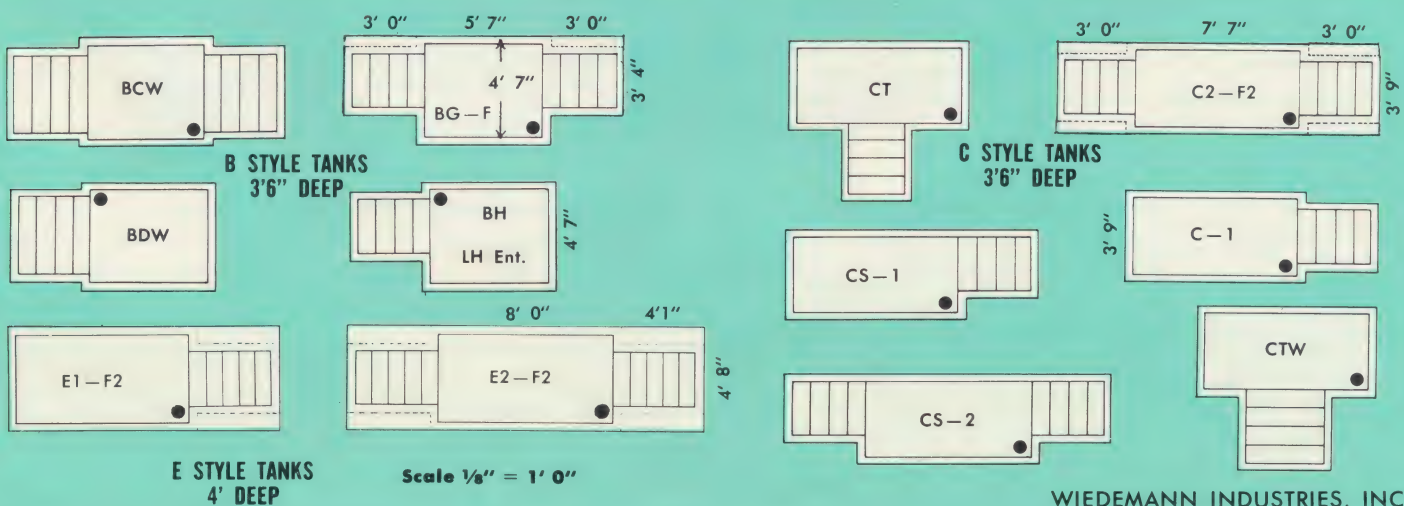


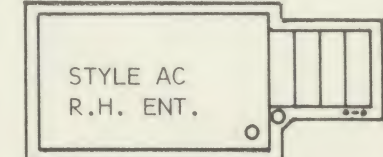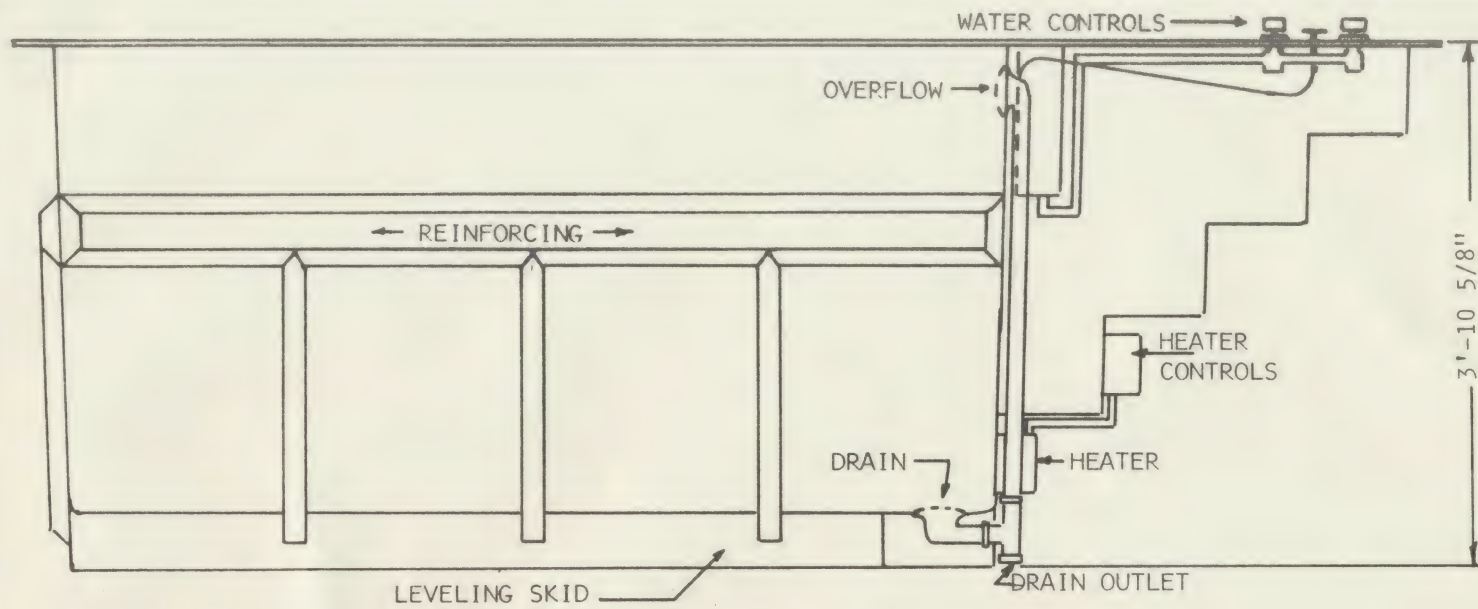

RIGHT HAND ENTRANCE

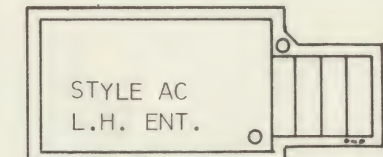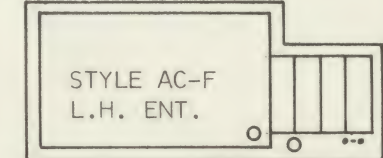

LEFT HAND ENTRANCE

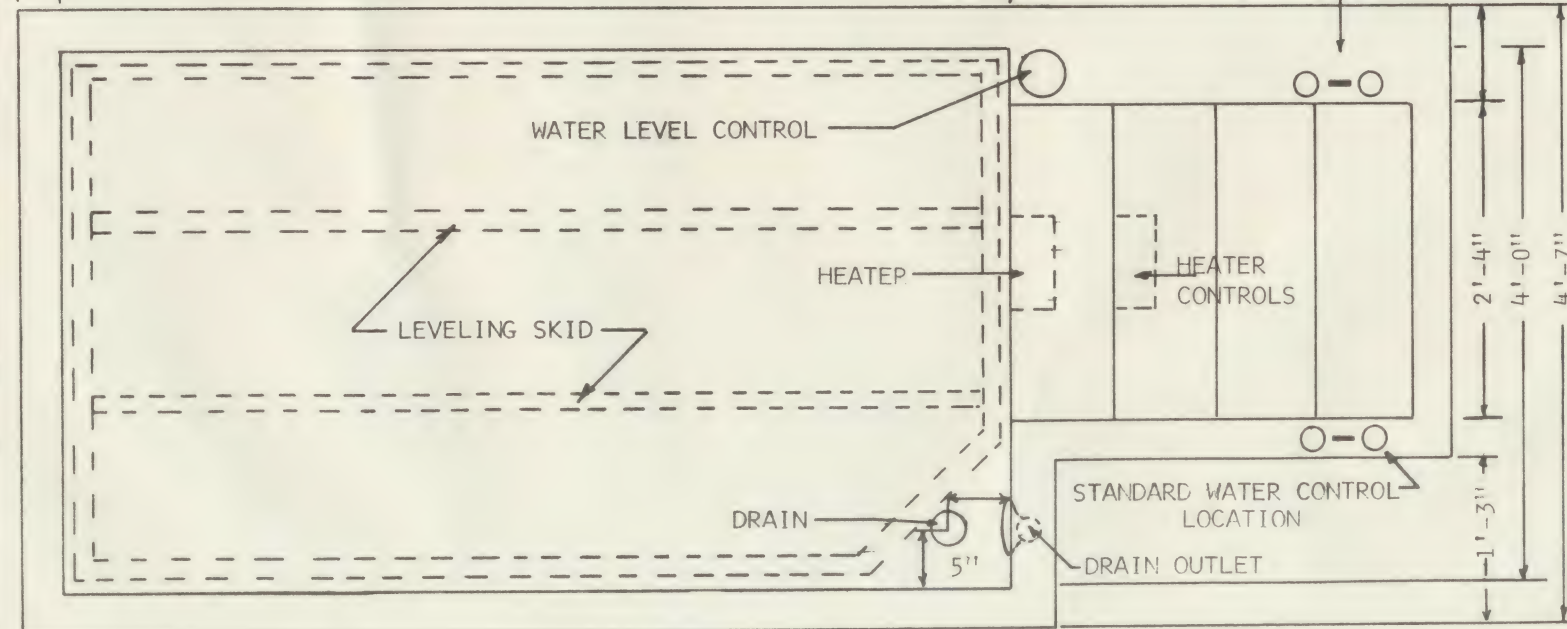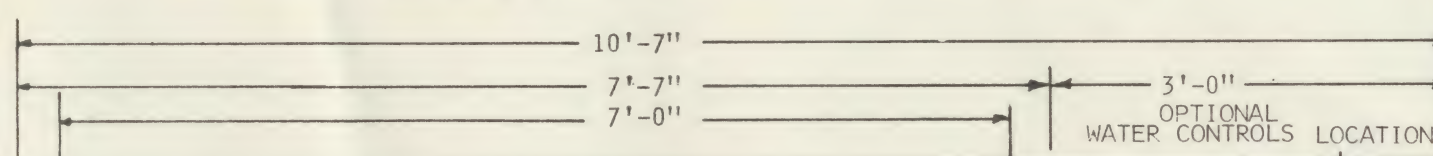


NOTE:
PICTURE WINDOW MAY
BE LOCATED ON EITHER
SIDE OF BAPTISTRY,
IF A PICTURE WINDOW
IS DESIRED.

DELUXE MODELS
STYLE AC & AC-F

WIEDEMANN INDUSTRIES
INC.

MUSCATINE, IOWA

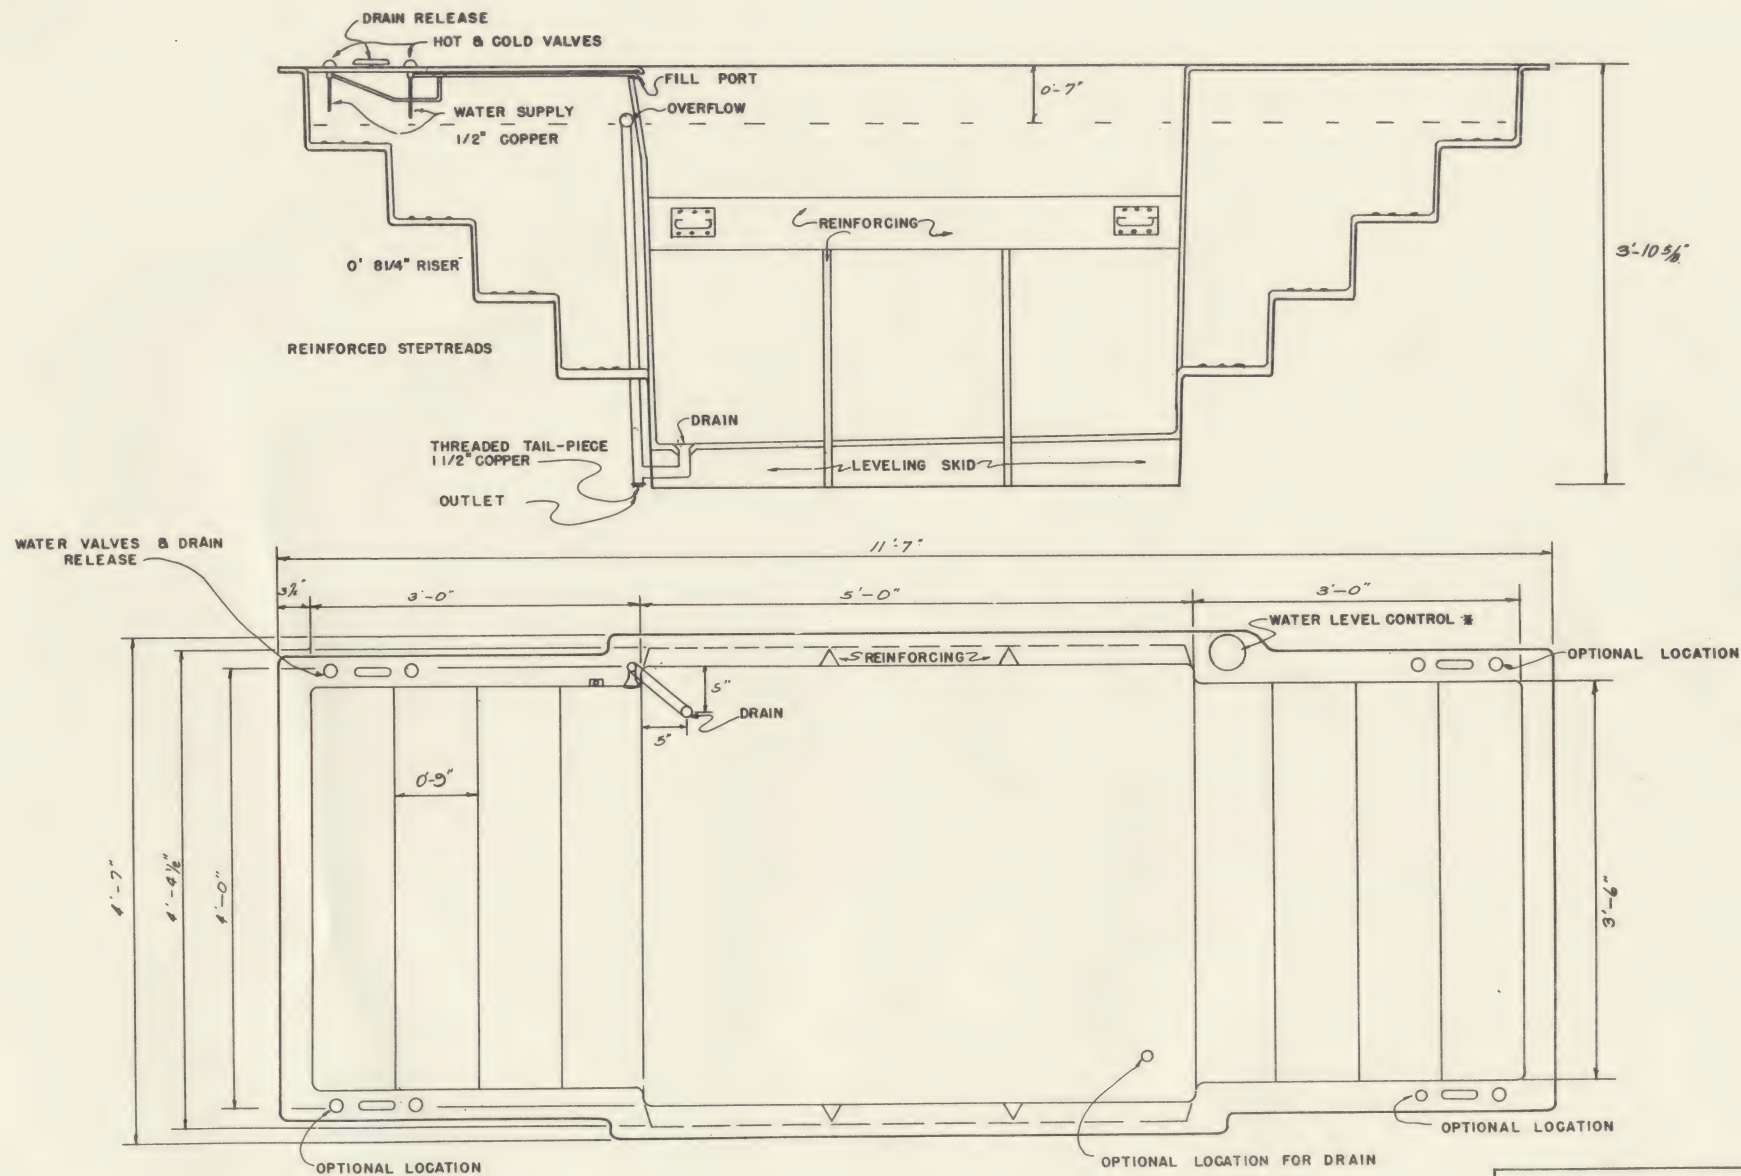

MODEL BB STYLE BC

* NOT STANDARD EQUIPMENT.
SEE PRICE LIST


FIBER-GLASS BAPTISTRY

SCALE 3/4" = 1'


WIEDEMANN INDUSTRIES

BOX 776 PHONE AM3-6642

MUSCATINE, IOWA

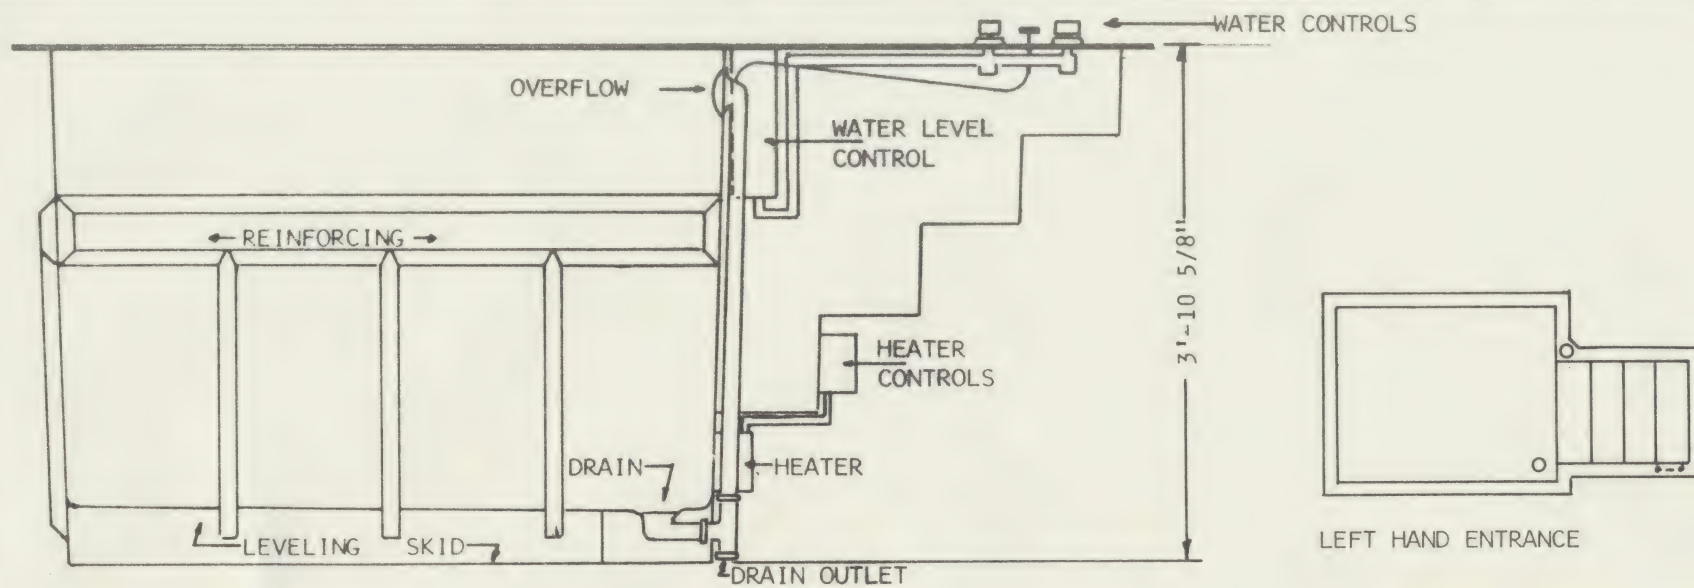


LEFT HAND ENTRANCE

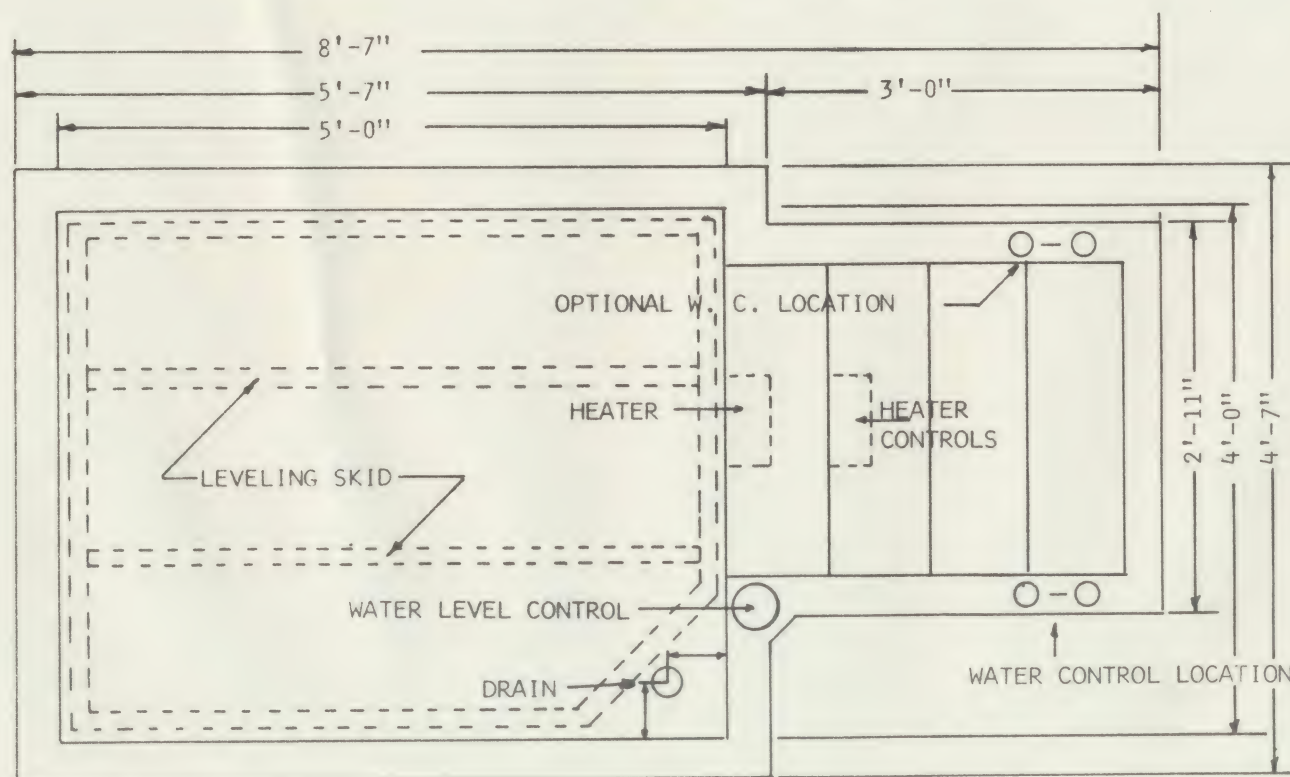

RIGHT HAND ENTRANCE


DELUXE MODEL STYLE BH
WITH BUILT IN ELECTRIC HEATER,
WATER LEVEL CONTROL, & PLUMBING

WIEDEMANN INDUSTRIES, INC.
MUSCATINE, IOWA

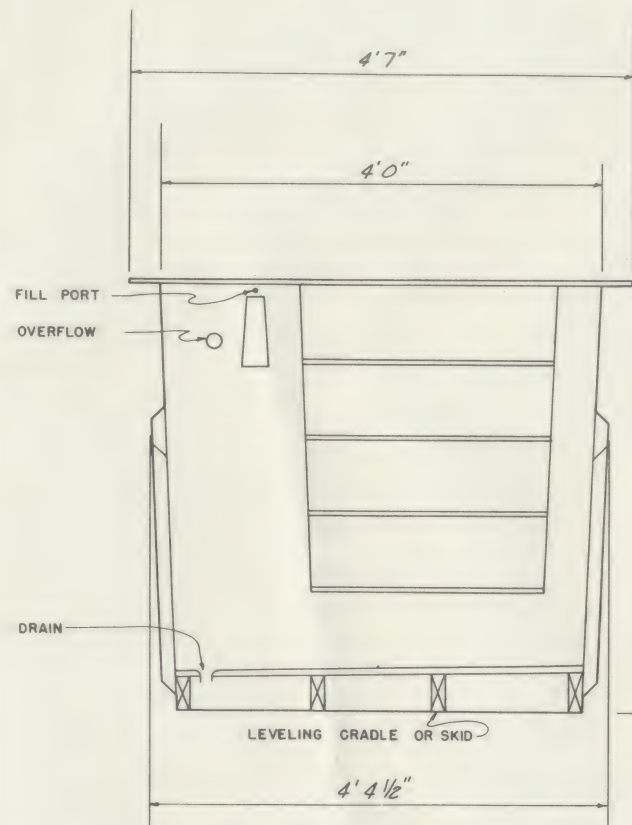

END SHOWING 28" STEP

STANDARD ON A B MODELS
AVAILABLE ON B B MODELS

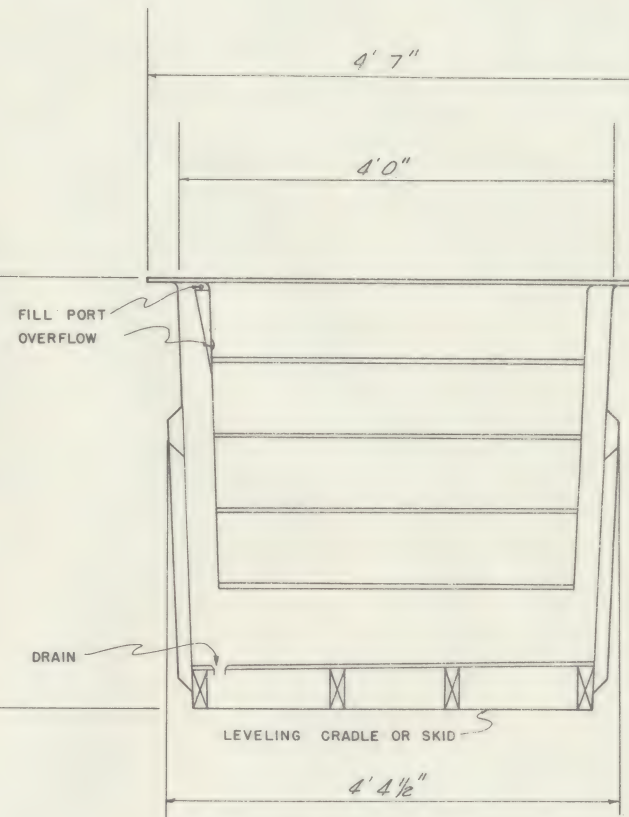

END SHOWING 42" STEP

STANDARD ON B B MODELS
AVAILABLE ON A A MODELS
SEE PRICE LIST


FIBER-GLASS BAPTISTRY

SCALE 3/4"=1'

WIEDEMANN INDUSTRIES

PHONE AM 3-6642

MUSCATINE, IOWA

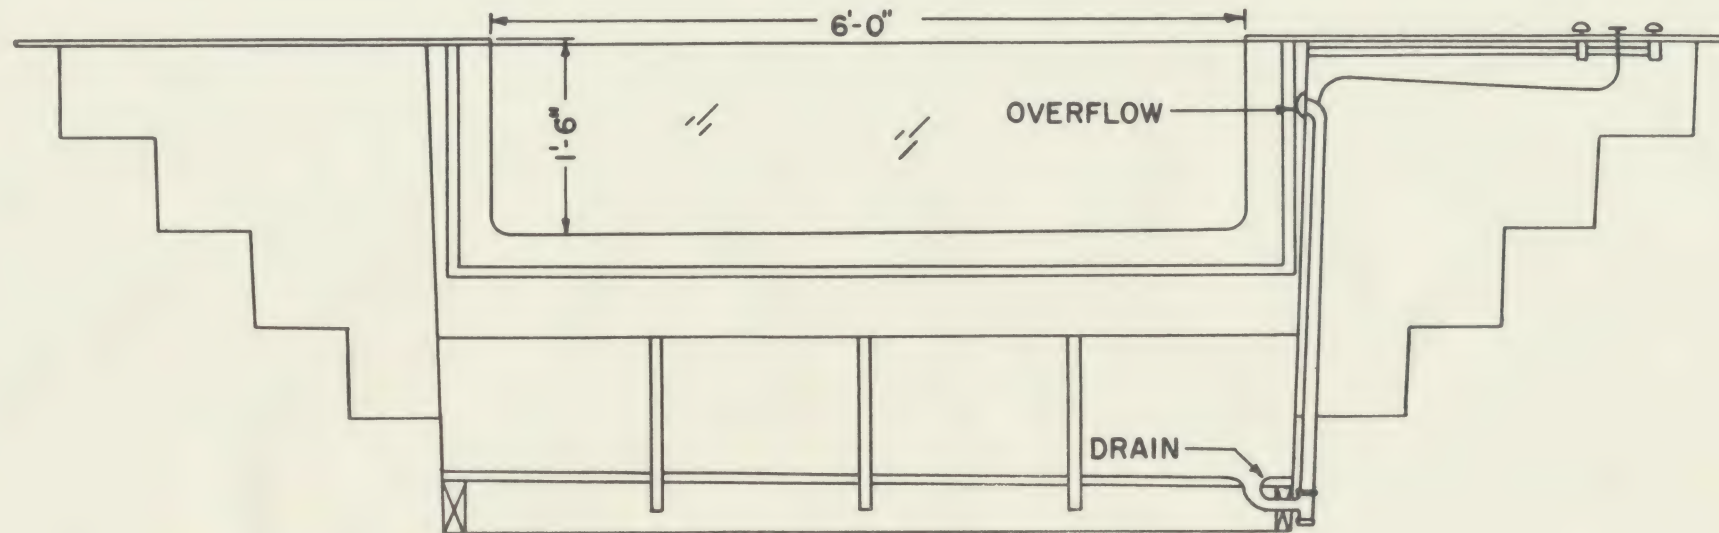

PICTURE WINDOW SIZES


W=6'-0" H=1'-6"


W=5'-0" H= 9"

W=6'-0" H=1'-0"


* W=4'-0" H=1'-6"

* DESIGNED FOR STYLE BC,
BD, BG & BH BAPTISTRIES.

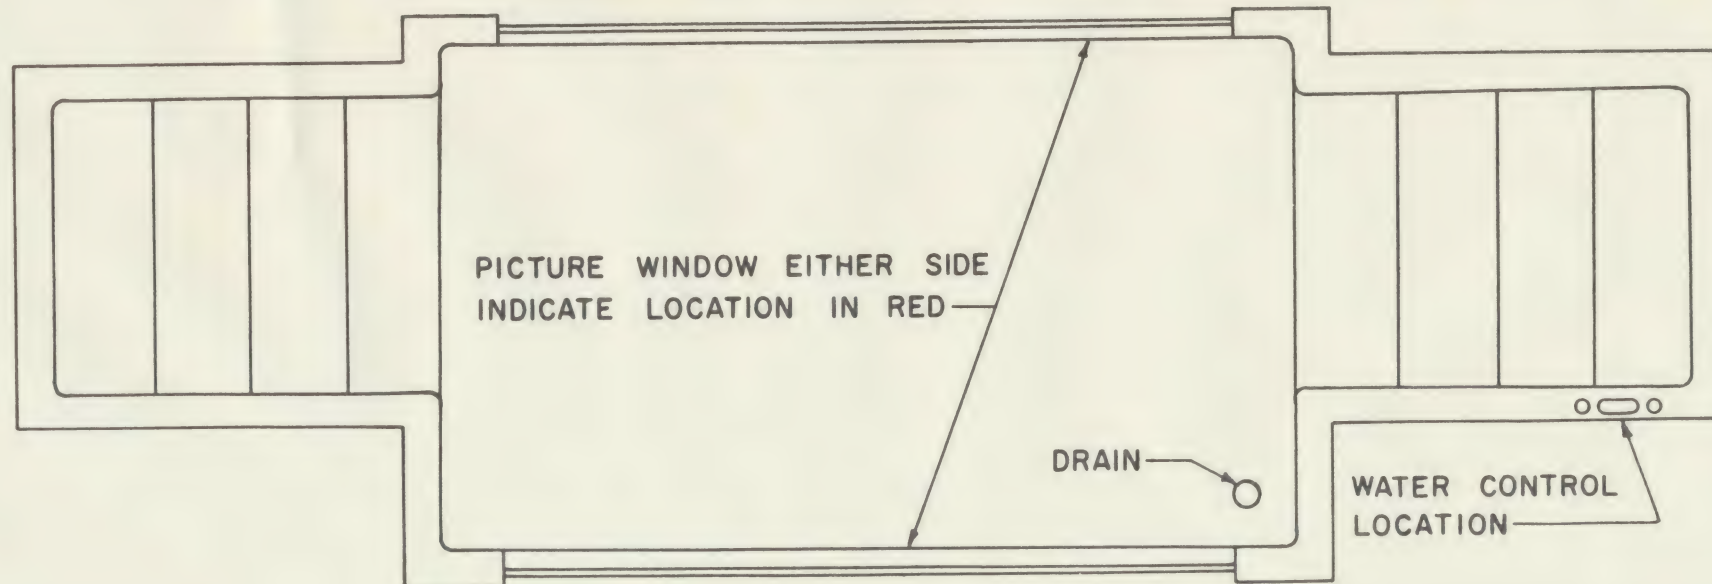


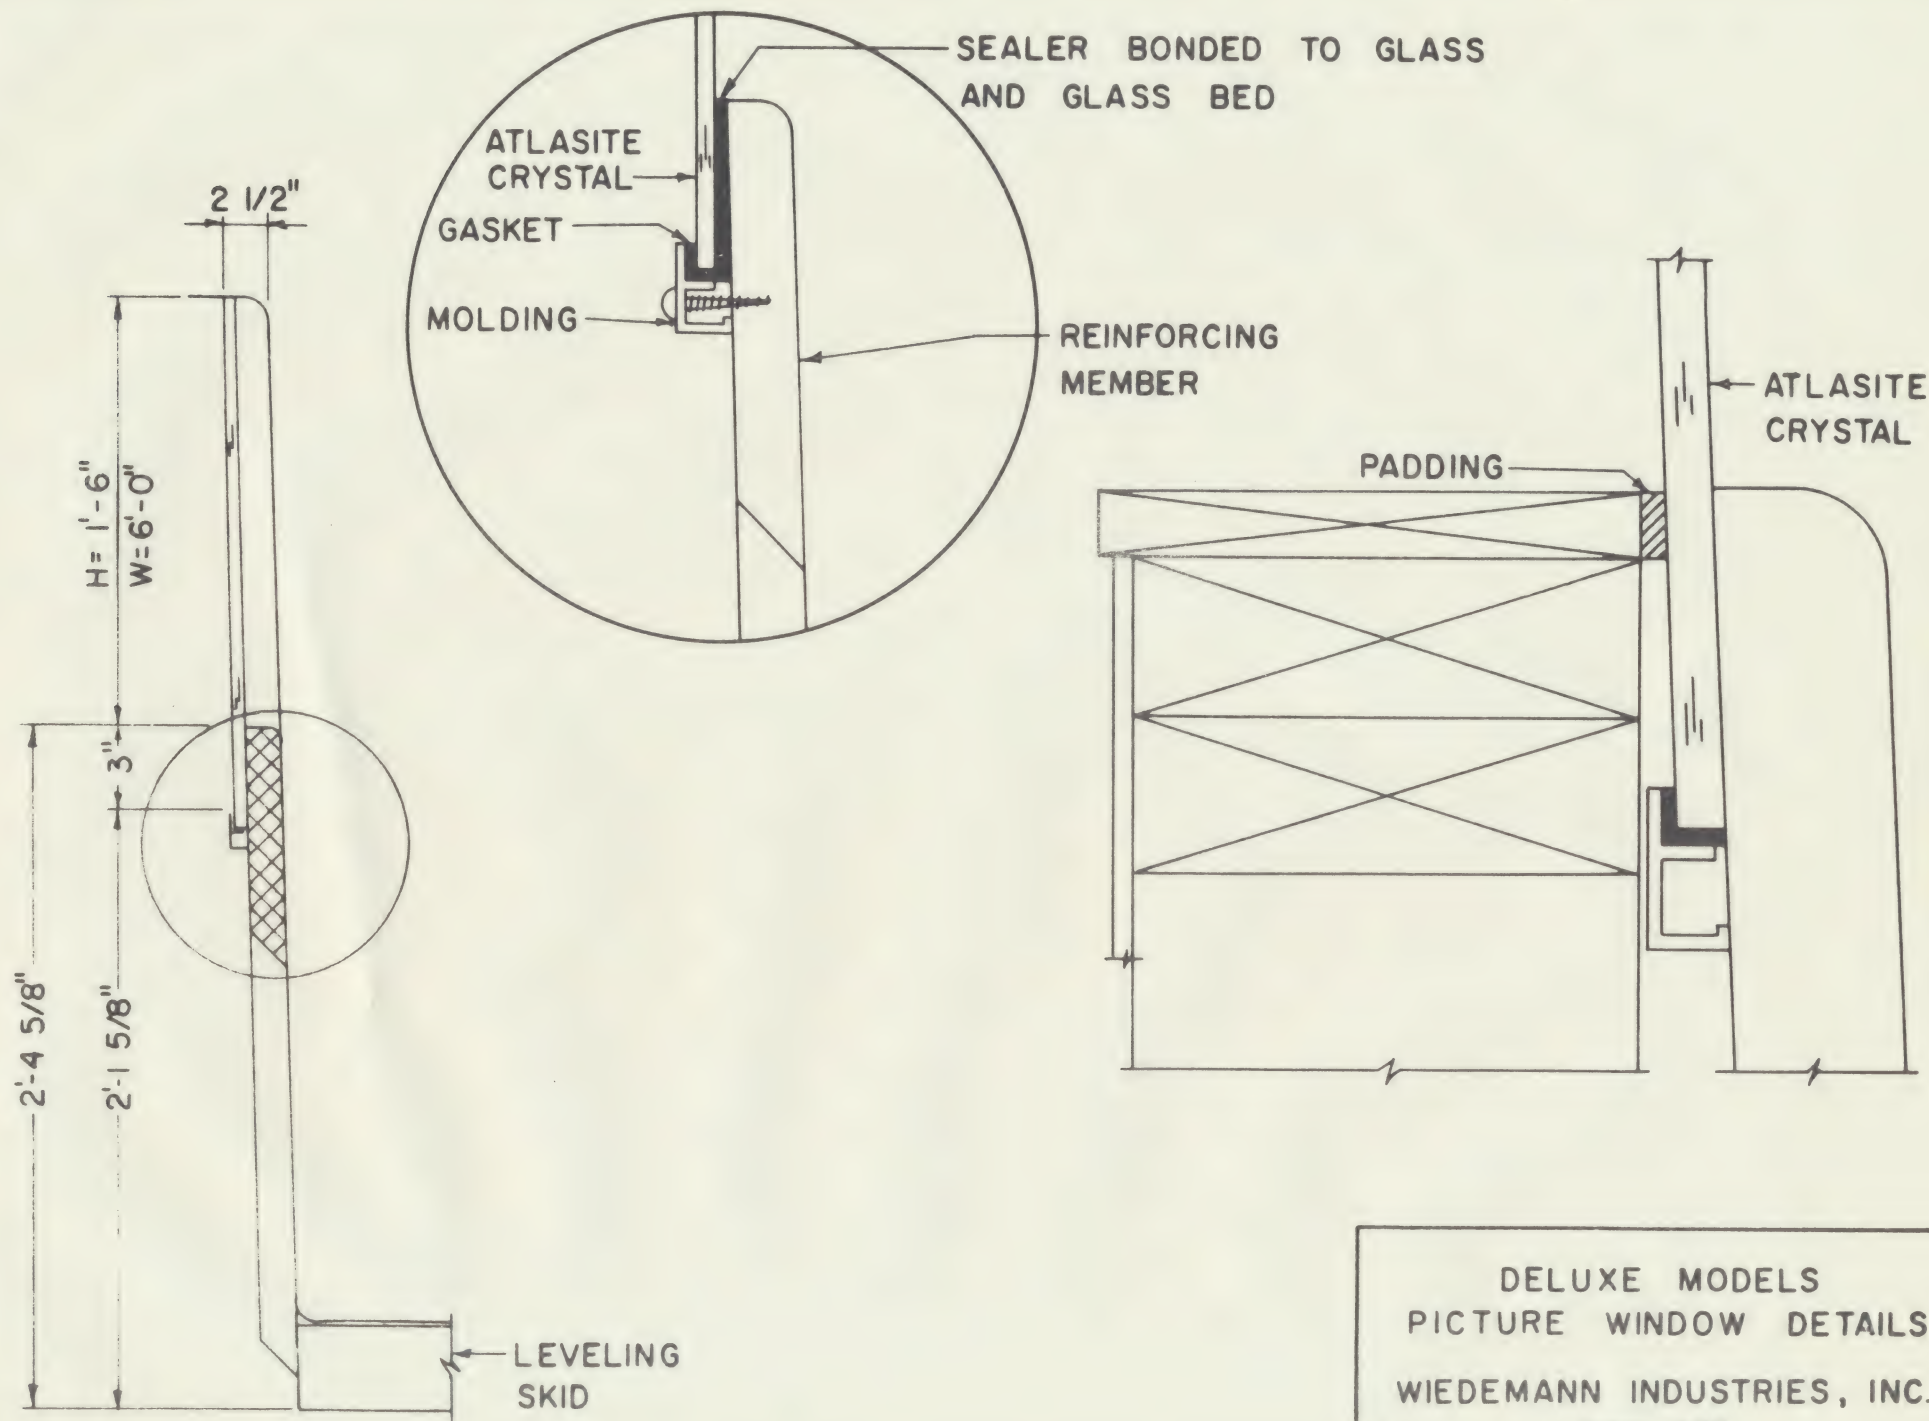


DELUXE MODELS
PICTURE WINDOW DETAILS
WIEDEMANN INDUSTRIES, INC.
BOX 672
MUSCATINE, IOWA

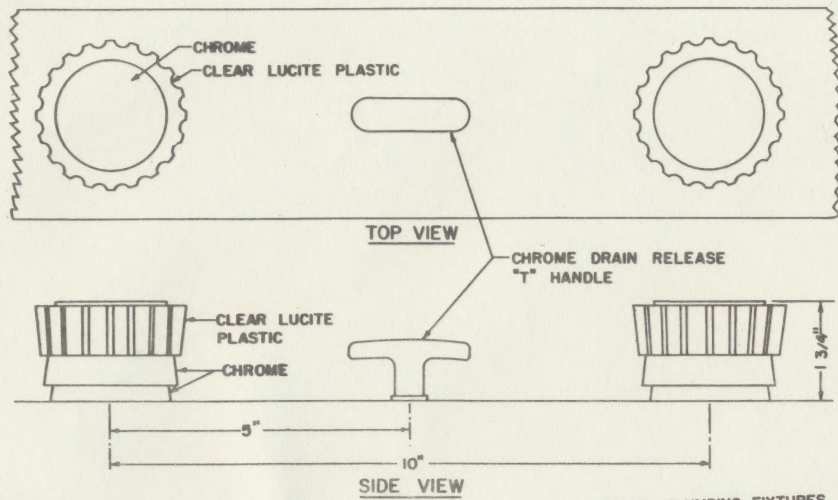


DELUXE PLUMBING FIXTURES
FOR DELUXE MODEL BAPTISTRIES

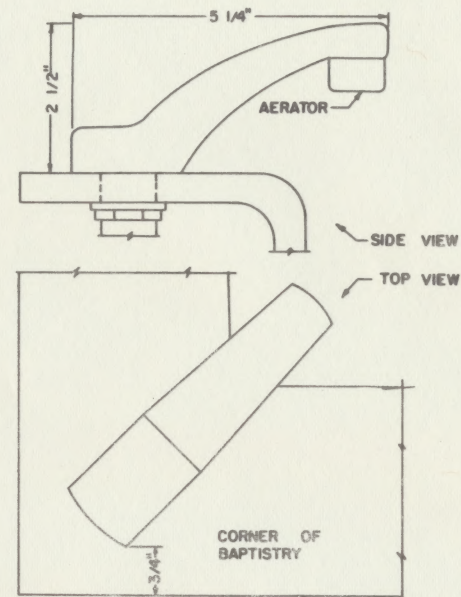


OVER THE RIM FILL FOR DELUXE MODELS

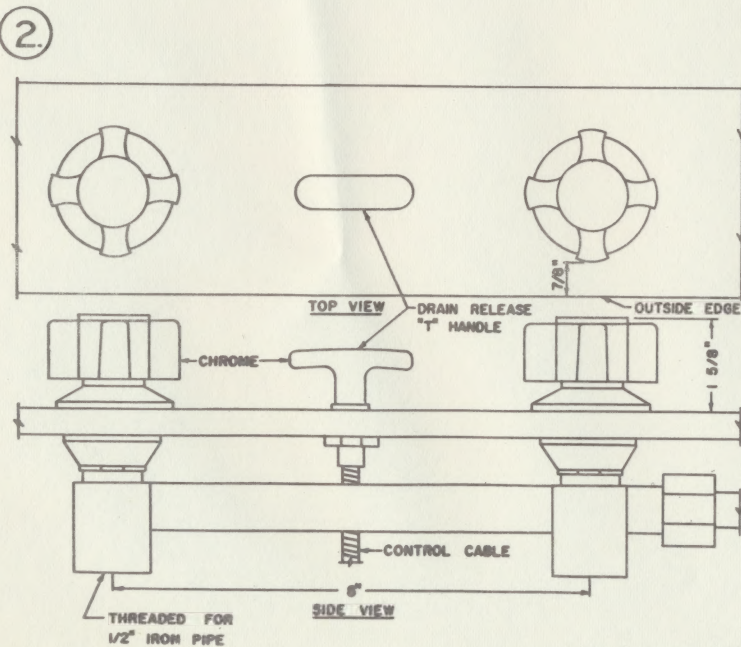


STANDARD FIXTURES FOR
DELUXE MODEL BAPTISTRIES

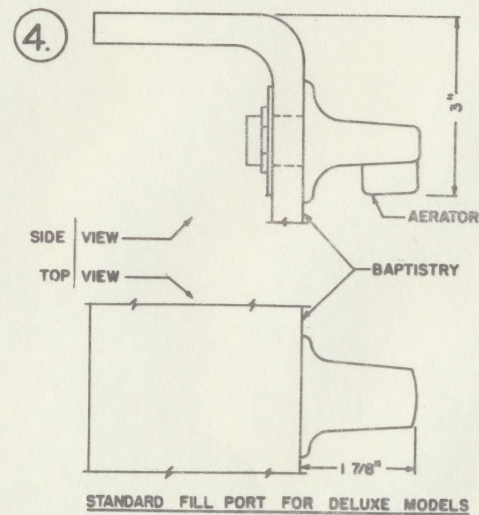

STANDARD FILL PORT FOR DELUXE MODELS



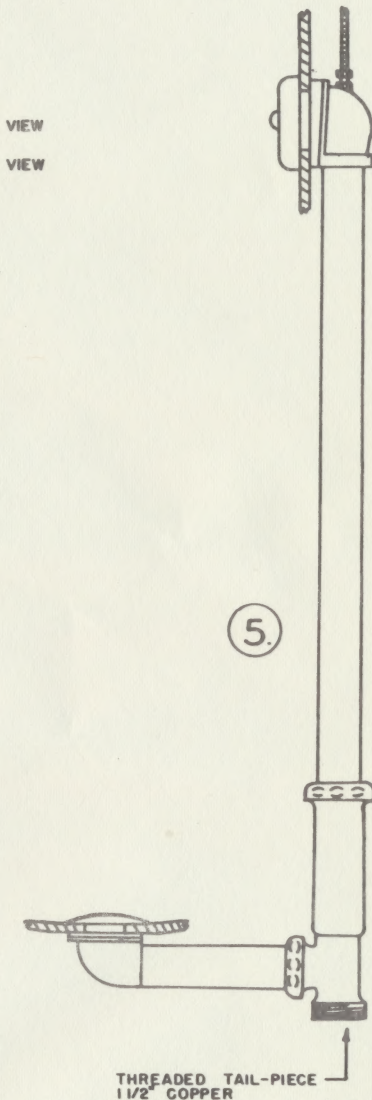


DRAIN, OVERFLOW
AND DRAIN VALVE
ASSEMBLY

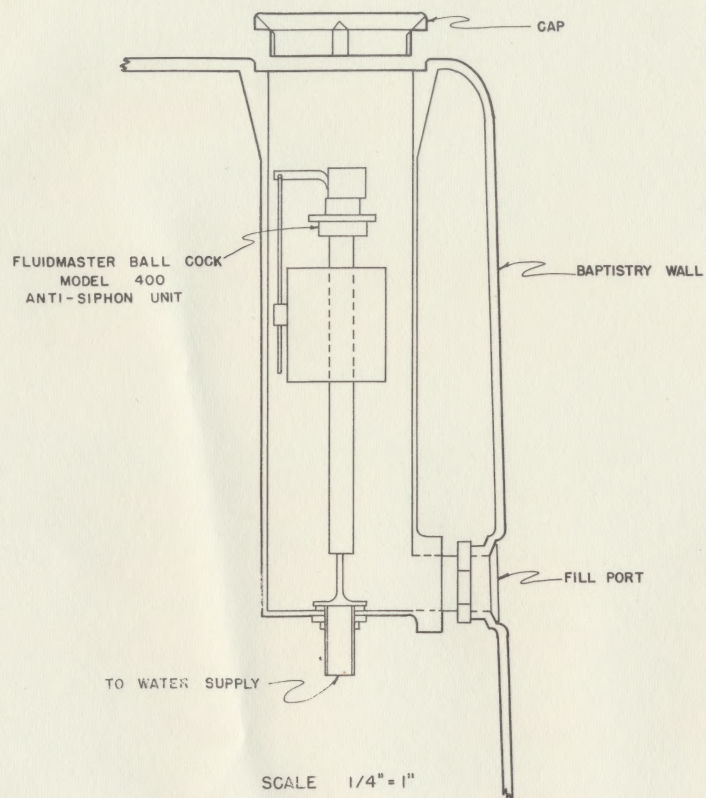


WATER LEVEL CONTROL
DELUXE BAPTISTRY
INSTALLATION
WIEDEMANN INDUSTRIES
BOX 672 PHONE AM3-6642
MUSCATINE, IOWA

SECTION AS VIEWED FROM INSIDE BAPTISTRY

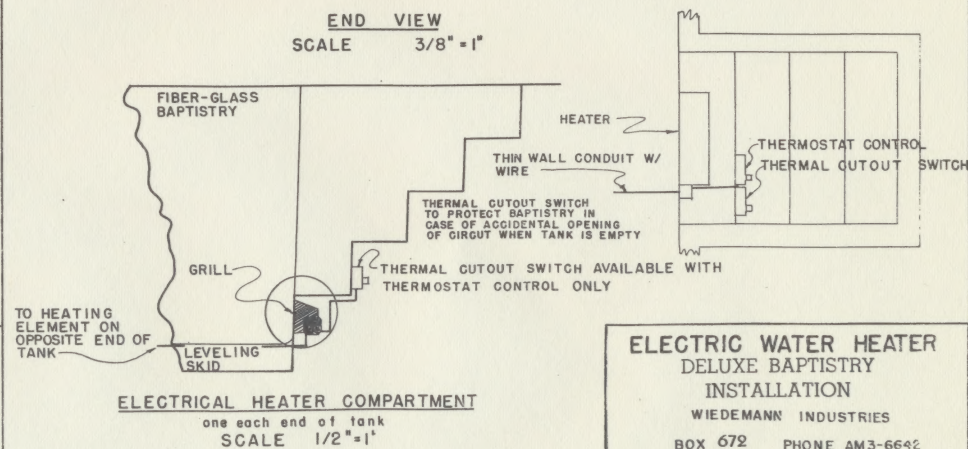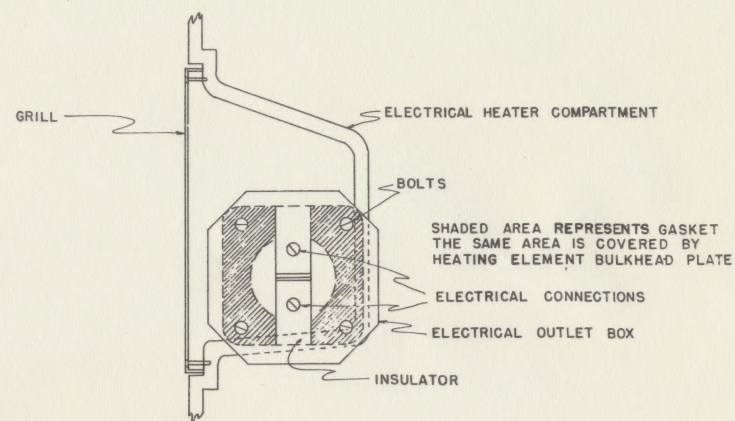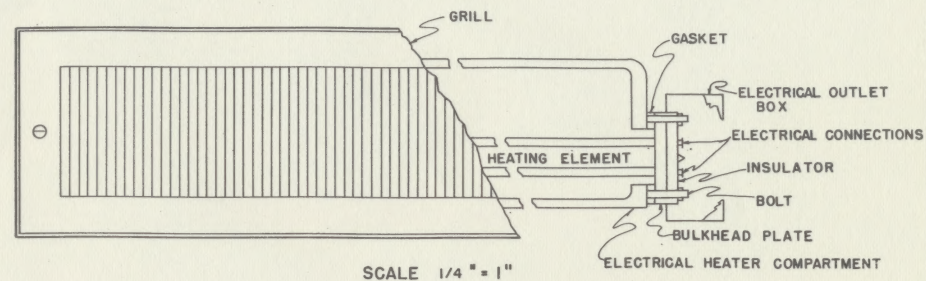


ELECTRIC WATER HEATER
DELUXE BAPTISTRY
INSTALLATION
WIEDEMANN INDUSTRIES
BOX 672 PHONE AM3-6642
MUSCATINE, IOWA

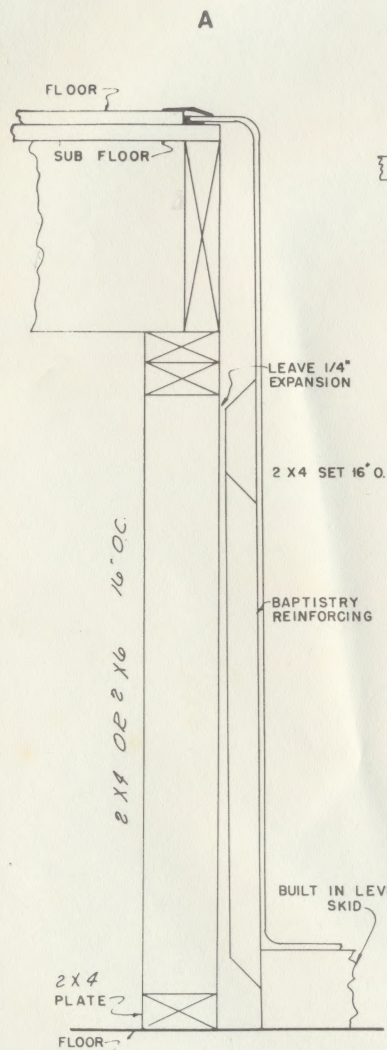


RECESSED INSTALLATION

SCALE 1-1/2" = 1"



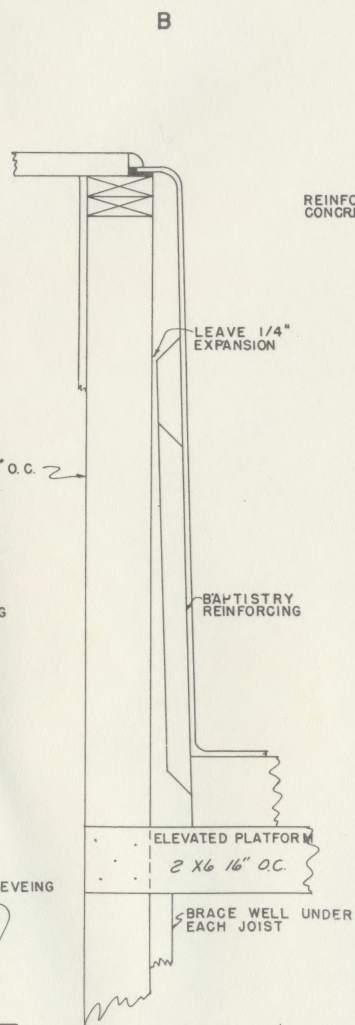


ELEVATION INSTALLATION

SCALE 1" = 1'

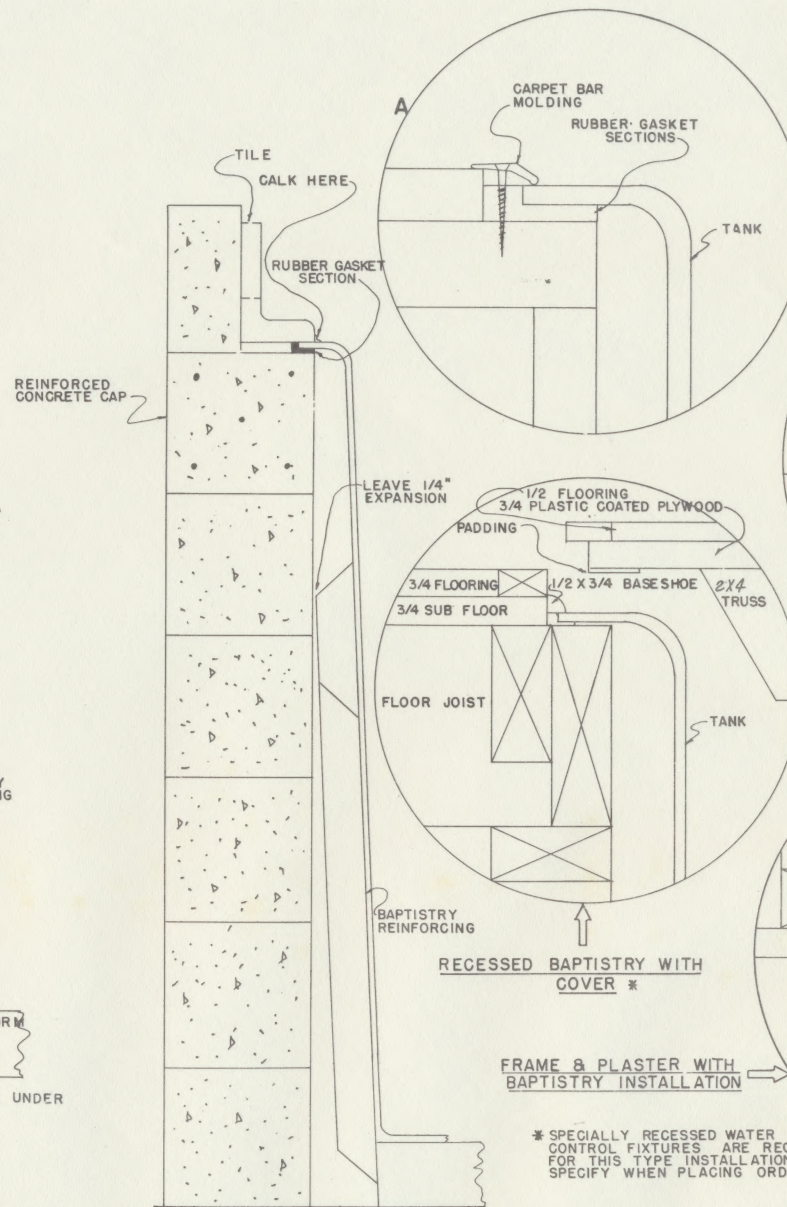

SCALE 1-1/2" = 1'

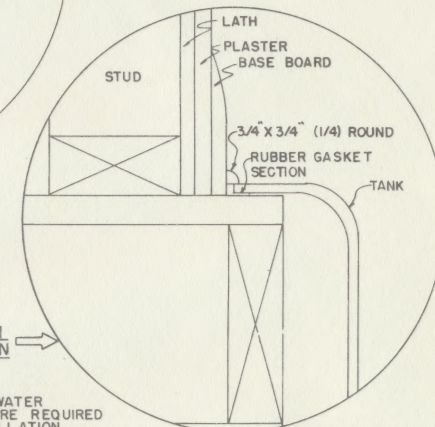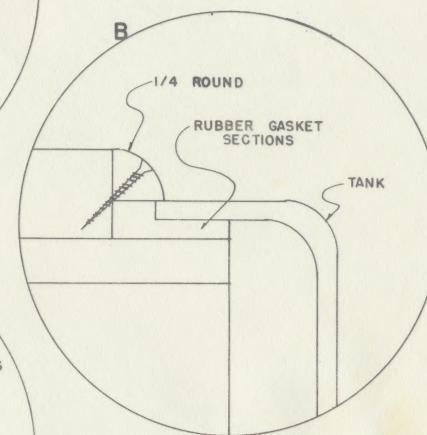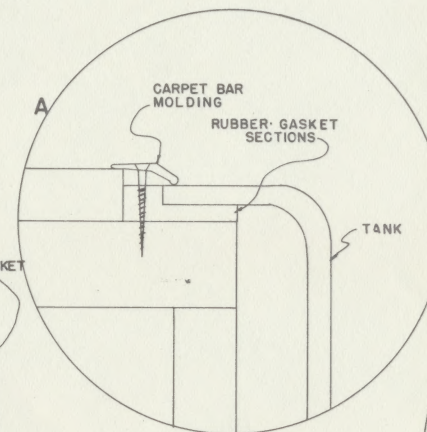

* SPECIALLY RECESSED WATER CONTROL FIXTURES ARE REQUIRED FOR THIS TYPE INSTALLATION. SPECIFY WHEN PLACING ORDER

**METHODS OF FIBER-GLASS
DELUXE BAPTISTRY
INSTALLATION**

WIEDEMANN INDUSTRIES
Box 672 Phone: 263-6642
MUSCATINE, IOWA 52761

BAPTISTRIES



CONTENTS MDSE. MAY BE OPENED FOR
POSTAL INSPECTION IF NECESSARY.
RETURN POSTAGE GUARANTEED

FROM

Wiedemann Industries, Inc.
Industrial Park - Box 672
MUSCATINE, IOWA 52761

To

J. Nelson Systems Consultant
Box 1546
Poughkeepsie, N. Y. 12603

YOUR ORDER NO.

OUR ORDER NO.

GRAYBAR CO., BROOKLYN, N. Y. 11222